Product Environmental Profile

5.7 Handheld Touch Panel, Emergency Stop

GP4000 Handy series








ENVPEP1604007_V2 07-2024

General information

| Reference product | 5.7 Handheld Touch Panel, Emergency Stop - PFXGP4311HTADER |
|----------------------------|---|
| Description of the product | PFXGP4311HTADER is advanced hand-held panel 640 x 480 pixels VGA - 5.7" - TFT LCD - 24 V DC |
| Description of the range | The products of the range are: GP4000 Handy series The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology. |
| Functional unit | To provide 5.7" Wide TFT Smart Display during 10 years and maximum use rate at 12W, based on below function: - 5.7" Wide Touchscreen panel - USB Interface (Type-A,) - Ethernet interface In accordance with the relevant standards: - UL 508 - FCC Class A - IEC 61000-6-2 - IEC 61131-2 |

Constituent materials

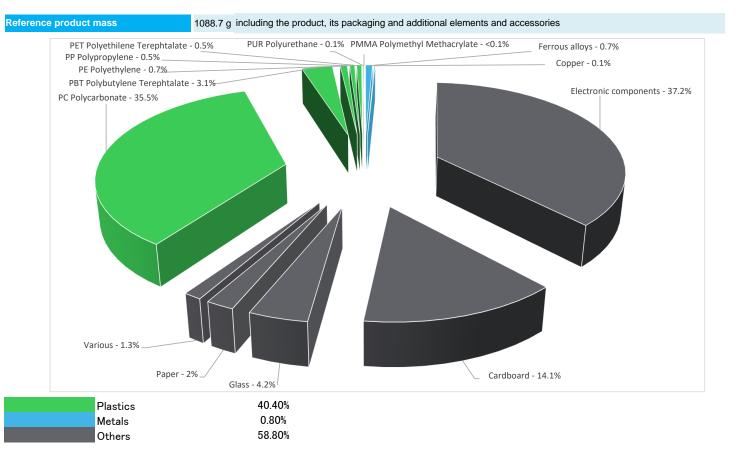

ENVPEP1604007_V2 07-2024

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

(1) Additional environmental information

End Of Life

Recyclability potential:

8%

The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.

Tenvironmental impacts

| Reference service life time | 10 years | | | | | | | |
|----------------------------------|--|--|--|--|--|--|--|--|
| Product category | Other equipments - Active product | | | | | | | |
| Installation elements | The product does not require any installation operations. | | | | | | | |
| Use scenario | See PSR | | | | | | | |
| Time representativeness | The collected data are representative of the year 2023 | | | | | | | |
| Technological representativeness | The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and représentaive of the actual type of technologies used to make the product. | | | | | | | |
| Geographical representativeness | Rest of the World | | | | | | | |
| | [A1 - A3] | [A5] | [B6] | [C1 - C4] | | | | |
| Energy model used | Electricity Mix; 2018; China, CN | Electricity Mix; Low voltage; 2018; France, FR Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; Low voltage; 2018; Asia Pacific, APAC | Electricity Mix; Low voltage; 2018; France, FR Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; Low voltage; 2018; Asia Pacific, APAC | Electricity Mix; Low voltage; 2018; France, FR Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; Low voltage; 2018; Asia Pacific, APAC | | | | |

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneiderelectric.com/contact

| Mandatory Indicators | 5.7 Handheld Touch Panel, Emergency Stop - PFXGP4311HTADER | | | | | | | |
|--|--|-----------------------------|------------------------------|------------------------|------------------------|-----------------|----------------------------|-----------------------------|
| Impact indicators | Unit | Total (without Module D) | [A1 - A3] - Manufacturing | [A4] - Distribution | [A5] - Installation | [B1 - B7] - Use | [C1 - C4] - End of life | [D] - Benefits and loads |
| Contribution to climate change | kg CO2 eq | 6.05E+02 | 7.56E+01 | 1.58E+00 | 0* | 4.85E+02 | 4.25E+01 | -5.00E-02 |
| Contribution to climate change-fossil | kg CO2 eq | 6.04E+02 | 7.54E+01 | 1.58E+00 | 0* | 4.85E+02 | 4.25E+01 | -4.92E-02 |
| Contribution to climate change-biogenic | kg CO2 eq | 5.47E-01 | 1.79E-01 | 0* | 0* | 3.66E-01 | 1.84E-03 | -8.61E-04 |
| Contribution to climate change-land use and land use change | e kg CO2 eq | 6.14E-04 | 6.14E-04 | 0* | 0* | 0* | 3.25E-07 | 0.00E+00 |
| Contribution to ozone depletion | kg CFC-11 eq | 1.20E-05 | 9.40E-06 | 2.41E-09 | 0* | 2.55E-06 | 3.88E-08 | -1.53E-08 |
| Contribution to acidification | mol H+ eq | 3.56E+00 | 5.06E-01 | 1.02E-02 | 0* | 3.01E+00 | 2.85E-02 | -8.82E-04 |
| Contribution to eutrophication, freshwater | kg (PO4) ³⁻ eq | 1.90E-03 | 1.82E-04 | 5.89E-07 | 0* | 1.50E-03 | 2.16E-04 | -1.38E-07 |
| Contribution to eutrophication marine | kg N eq | 4.17E-01 | 5.62E-02 | 4.78E-03 | 4.39E-05 | 3.42E-01 | 1.35E-02 | -3.23E-05 |
| Contribution to eutrophication, terrestrial | mol N eq | 4.81E+00 | 5.93E-01 | 5.26E-02 | 0* | 4.02E+00 | 1.42E-01 | -3.67E-04 |
| Contribution to photochemical ozone formation - human health | kg COVNM eq | 1.38E+00 | 1.97E-01 | 1.35E-02 | 0* | 1.13E+00 | 3.43E-02 | -1.71E-04 |
| Contribution to resource use, minerals and metals | kg Sb eq | 1.47E-02 | 1.47E-02 | 0* | 0* | 2.33E-05 | 1.80E-06 | -1.11E-05 |
| Contribution to resource use, fossils | MJ | 1.41E+04 | 9.59E+02 | 2.19E+01 | 0* | 1.31E+04 | 5.47E+01 | -7.03E-01 |
| Contribution to water use | m3 eq | 4.51E+01 | 2.34E+01 | 5.96E-03 | 1.66E-02 | 1.97E+01 | 2.08E+00 | -4.90E-02 |

ENVPEP1604007_V2 07-2024

| Inventory flows Indicators | 5.7 Handheld Touch Panel, Emergency Stop - PFXGP4311HTADER | | | | | | | |
|---|--|-----------------------------|------------------------------|------------------------|------------------------|-----------------|----------------------------|-----------------------------|
| Inventory flows | Unit | Total (without Module D) | [A1 - A3] - Manufacturing | [A4] - Distribution | [A5] - Installation | [B1 - B7] - Use | [C1 - C4] - End of life | [D] - Benefits and loads |
| Contribution to use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 1.40E+03 | 3.41E+01 | 0* | 0* | 1.37E+03 | 2.30E-01 | -2.02E-02 |
| Contribution to use of renewable primary energy resources used as raw material | MJ | 3.63E+00 | 3.63E+00 | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to total use of renewable primary energy resources | MJ | 1.41E+03 | 3.77E+01 | 0* | 0* | 1.37E+03 | 2.30E-01 | -2.02E-02 |
| Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 1.41E+04 | 9.37E+02 | 2.19E+01 | 0* | 1.31E+04 | 5.47E+01 | -7.03E-01 |
| Contribution to use of non renewable primary energy resources used as raw material | MJ | 2.13E+01 | 2.13E+01 | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to total use of non-renewable primary energy resources | MJ | 1.41E+04 | 9.59E+02 | 2.19E+01 | 0* | 1.31E+04 | 5.47E+01 | -7.03E-01 |
| Contribution to use of secondary material | kg | 3.96E-04 | 3.96E-04 | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to net use of freshwater | m³ | 1.06E+00 | 5.51E-01 | 1.39E-04 | 3.86E-04 | 4.58E-01 | 4.84E-02 | -1.14E-03 |
| Contribution to hazardous waste disposed | kg | 2.83E+02 | 2.65E+02 | 0* | 0* | 1.13E+01 | 7.01E+00 | -9.07E-01 |
| Contribution to non hazardous waste disposed | kg | 1.00E+02 | 1.69E+01 | 5.51E-02 | 1.79E-01 | 7.48E+01 | 8.02E+00 | -1.48E-02 |
| Contribution to radioactive waste disposed | kg | 1.77E-02 | 7.56E-03 | 3.92E-05 | 0* | 9.77E-03 | 3.44E-04 | -7.44E-06 |
| Contribution to components for reuse | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to materials for recycling | kg | 7.61E-02 | 5.92E-03 | 0* | 0* | 0* | 7.02E-02 | 0.00E+00 |
| Contribution to materials for energy recovery | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to exported energy | MJ | 1.16E-04 | 3.21E-05 | 0* | 0* | 0* | 8.40E-05 | 0.00E+00 |
| * represents less than 0.01% of the total life cycle of the refe | rence flow | | | | | | | |

| Contribution to biogenic carbon content of the product | kg de C | 0.00E+00 |
|---|---------|----------|
| Contribution to biogenic carbon content of the associated packaging | kg de C | 5.19E-02 |

Life cycle assessment performed with EIME version v6.2.1, database version 2023-02 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"

| Registration number : | | ENVPEP1604007_V2 | Drafting rules | PCR-4-ed4-EN-2021 09 06 | | |
|---|--------------|---|-------------------------------------|------------------------------|--|--|
| | | | Supplemented by | PSR-0005-ed3.1-EN-2023 12 08 | | |
| Date of issue | | 07-2024 | Information and reference documents | www.pep-ecopassport.org | | |
| | | | Validity period | 5 years | | |
| Independent verificati | ion of the d | leclaration and data, in compliance with ISO 14021 : 2016 | | | | |
| Internal | Χ | External | | | | |
| The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain) | | | | | | |
| PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022 | | | | | | |
| The components of the present PEP may not be compared with components from any other program. | | | | | | |

Schneider Electric Industries SAS Country Customer Care Center http://www.se.com/contact

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

07-2024 ENVPEP1604007_V2 ©2024 - Schneider Electric - All rights reserved

ENVPEP1604007_V2 07-2024