
# **Product Environmental Profile**

### **Zelio Logic Smart Relays**





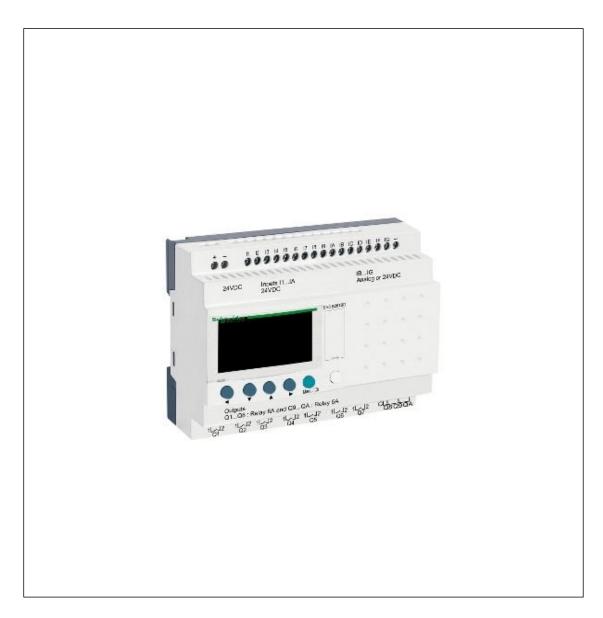


## General information

Reference product	Zelio Logic Smart Relays - SR3B261BD
Description of the product	Modular smart relay Zelio Logic - 26 I/O - 24 VDC clock - display.
Functional unit	To provide automated control of simple systems from 10 to 40 I/O for 10 years 100% of the time.
Specifications are:	U = Rated voltage(V) = 24V.  IP degree of protection = IP20 IEC 60529 terminal block and IP40 IEC 60529 front panel Standards :-  EN/IEC 61000-4-2 level 3  EN/IEC 61000-4-5  EN/IEC 61000-4-6 level 3  EN/IEC 61000-4-11  EN/IEC 61000-4-3  EN/IEC 61000-4-3  EN/IEC 60068-2-27 Ea  EN/IEC 60008-2-6 Fc  EN/IEC 60008-4-4 level 3

### **Constituent materials**

Reference product mass 400 g including the product, its packaging and additional elements and accessories

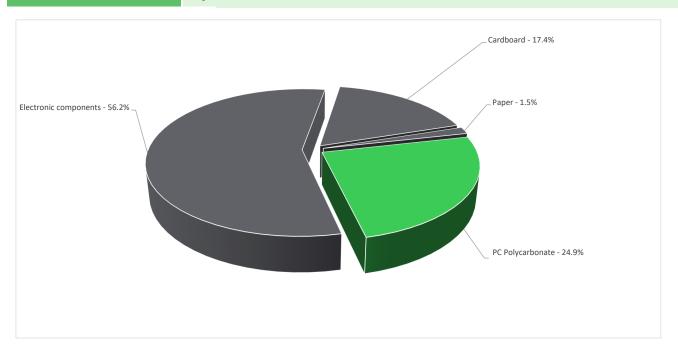



## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="https://www.se.com/ww/en/work/support/green-premium/">https://www.se.com/ww/en/work/support/green-premium/</a>

## (1) Additional environmental information

End Of Life

Recyclability potential:

0%

The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.

## **Environmental impacts**

Reference service life time	10 years									
Product category	Other equipments - Active product									
Installation elements	The product doesn't require special installation procedure and requires little to no energy to install.									
Use scenario	The product is in active mode 100% of the time with a power use of 6.2W for 10 years.									
Time representativeness	The collected data are representative of the year	2024								
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and représentaive of the actual type of technologies used to make the product.									
Geographical representativeness	Europe									
	[A1 - A3] [A5] [B6] [C1 - C4]									
		Electricity Mix; Low voltage; 2018; Europe, EU-27	Electricity Mix; Low voltage; 2018; Europe, EU-27							
Energy model used	Electricity Mix; Low voltage; 2018; France, FR	Electricity Mix; Low voltage; 2018; Canada, CA	Electricity Mix; Low voltage; 2018; Canada, CA	Electricity Mix; Low voltage; 2018; Canada, CA						
		Electricity Mix; Low voltage; 2018; Turkey, TR	Electricity Mix; Low voltage; 2018; Turkey, TR	Electricity Mix; Low voltage; 2018; Turkey, TR						

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneiderelectric.com/contact

Mandatory Indicators	Zelio Logic Smart Relays - SR3B261BD							
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	2.53E+02	4.90E+01	7.94E-01	7.52E-02	2.02E+02	1.00E+00	-8.03E-02
Contribution to climate change-fossil	kg CO2 eq	2.52E+02	4.89E+01	7.94E-01	7.15E-02	2.02E+02	9.98E-01	-7.15E-02
Contribution to climate change-biogenic	kg CO2 eq	2.96E-01	5.73E-02	0*	3.67E-03	2.31E-01	4.01E-03	-8.79E-03
Contribution to climate change-land use and land use change	kg CO2 eq	1.55E-04	1.55E-04	0*	0*	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	4.78E-06	3.20E-06	6.97E-07	9.93E-10	8.80E-07	8.08E-10	-2.20E-09
Contribution to acidification	mol H+ eq	1.53E+00	3.93E-01	3.26E-03	2.20E-04	1.14E+00	6.59E-04	-3.78E-04
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	4.58E-04	2.05E-05	9.25E-08	1.72E-06	4.30E-04	5.44E-06	-1.12E-06
Contribution to eutrophication marine	kg N eq	1.74E-01	4.14E-02	1.48E-03	9.55E-05	1.31E-01	3.29E-04	-1.15E-04
Contribution to eutrophication, terrestrial	mol N eq	2.25E+00	4.51E-01	1.61E-02	6.64E-04	1.78E+00	3.35E-03	-9.47E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	5.75E-01	1.43E-01	5.37E-03	1.52E-04	4.25E-01	8.11E-04	-2.45E-04
Contribution to resource use, minerals and metals	kg Sb eq	3.03E-03	3.01E-03	0*	0*	1.33E-05	0*	-7.59E-09
Contribution to resource use, fossils	MJ	5.43E+03	7.53E+02	9.83E+00	7.43E-01	4.66E+03	1.17E+00	-8.63E-01
Contribution to water use	m3 eq	2.77E+01	2.03E+01	4.01E-02	5.95E-03	7.33E+00	3.22E-02	-1.77E-02

11-2024 ENVPEP060406EN\_V4-EN

Inventory flows Indicators	Zelio Logic Smart Relays - SR3B261BD								
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.29E+03	3.97E+00	0*	0*	1.29E+03	0*	2.39E-01	
Contribution to use of renewable primary energy resources used as raw material	MJ	1.55E+00	1.55E+00	0*	0*	0*	0*	-1.04E+00	
Contribution to total use of renewable primary energy resources	MJ	1.29E+03	5.52E+00	0*	0*	1.29E+03	0*	-7.98E-01	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.42E+03	7.48E+02	9.83E+00	7.43E-01	4.66E+03	1.17E+00	-8.63E-01	
Contribution to use of non renewable primary energy resources used as raw material	MJ	4.90E+00	4.90E+00	0*	0*	0*	0*	0.00E+00	
Contribution to total use of non-renewable primary energy resources	MJ	5.43E+03	7.53E+02	9.83E+00	7.43E-01	4.66E+03	1.17E+00	-8.63E-01	
Contribution to use of secondary material	kg	3.00E-05	3.00E-05	0*	0*	0*	0*	0.00E+00	
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to net use of freshwater	m³	6.46E-01	4.74E-01	9.34E-04	1.39E-04	1.71E-01	7.51E-04	-4.13E-04	
Contribution to hazardous waste disposed	kg	9.76E+00	5.55E+00	0*	1.87E-03	3.98E+00	2.25E-01	-2.16E-03	
Contribution to non hazardous waste disposed	kg	4.15E+01	1.08E+01	0*	3.21E-02	3.05E+01	1.15E-01	-4.29E-02	
Contribution to radioactive waste disposed	kg	7.51E-03	1.83E-03	1.57E-04	3.96E-06	5.52E-03	5.38E-06	-1.97E-05	
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to materials for recycling	kg	8.39E-05	1.90E-06	0*	8.20E-05	0*	0*	0.00E+00	
Contribution to materials for energy recovery	kg	6.52E-08	6.52E-08	0*	0*	0*	0*	0.00E+00	
Contribution to exported energy	MJ	3.07E-03	7.05E-06	0*	3.07E-03	0*	0*	0.00E+00	
* represents less than 0.01% of the total life cycle of the re-	ference flow								
Contribution to biogenic carbon content of the product	kg of C	0.00E+00							
Contribution to biogenic carbon content of the associated	ka of C	1 07F_02							

Contribution to biogenic carbon content of the associated packaging kg of C 1.97E-02

ry Indicators Zelio Logic Smart Relays - SR3B261BD						
[B2]	[B3]	[B4]	[B5]	[B6]	[B7]	
0*	0*	0*	0*	2.02E+02	0*	
0*	0*	0*	0*	2.02E+02	0*	
0*	0*	0*	0*	2.31E-01	0*	
0*	0*	0*	0*	0*	0*	
0*	0*	0*	0*	8.80E-07	0*	
0*	0*	0*	0*	1.14E+00	0*	
0*	0*	0*	0*	4.30E-04	0*	
0*	0*	0*	0*	1.31E-01	0*	
0*	0*	0*	0*	1.78E+00	0*	
0*	0*	0*	0*	4.25E-01	0*	
0*	0*	0*	0*	1.33E-05	0*	
0*	0*	0*	0*	4.66E+03	0*	
0*	0*	0*	0*	7.33E+00	0*	
	0* 0* 0* 0* 0* 0* 0* 0* 0* 0* 0* 0* 0* 0	0* 0* 0* 0* 0* 0* 0* 0* 0* 0*	0* 0* 0* 0* 0* 0* 0* 0* 0* 0* 0* 0* 0* 0	0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0	0*         0*         0*         0*         2.02E+02           0*         0*         0*         0*         2.02E+02           0*         0*         0*         0*         2.31E-01           0*         0*         0*         0*         0*           0*         0*         0*         0*         0*           0*         0*         0*         0*         8.80E-07           0*         0*         0*         0*         1.14E+00           0*         0*         0*         0*         4.30E-04           0*         0*         0*         0*         1.31E-01           0*         0*         0*         0*         1.78E+00           0*         0*         0*         0*         4.25E-01           0*         0*         0*         0*         4.66E+03	

Zelio Logic Smart Relays - SR3B261BD								
Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
MJ	1.29E+03	0*	0*	0*	0*	0*	1.29E+03	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
MJ	1.29E+03	0*	0*	0*	0*	0*	1.29E+03	0*
MJ	4.66E+03	0*	0*	0*	0*	0*	4.66E+03	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
MJ	4.66E+03	0*	0*	0*	0*	0*	4.66E+03	0*
kg	0*	0*	0*	0*	0*	0*	0*	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
m³	1.71E-01	0*	0*	0*	0*	0*	1.71E-01	0*
kg	3.98E+00	0*	0*	0*	0*	0*	3.98E+00	0*
kg	3.05E+01	0*	0*	0*	0*	0*	3.05E+01	0*
kg	5.52E-03	0*	0*	0*	0*	0*	5.52E-03	0*
kg	0*	0*	0*	0*	0*	0*	0*	0*
kg	0*	0*	0*	0*	0*	0*	0*	0*
kg	0*	0*	0*	0*	0*	0*	0*	0*
MJ	0*	0*	0*	0*	0*	0*	0*	0*
	MJ MJ MJ MJ MJ MJ MJ kg MJ kg kg kg kg kg	MJ 1.29E+03  MJ 0   MJ 1.29E+03  MJ 4.66E+03  MJ 0   MJ 4.66E+03  kg 0   MJ 0   MJ 0   MJ 0   kg 0   MJ 0   kg 3.98E+00  kg 3.05E+01  kg 5.52E-03  kg 0   kg	MJ 1.29E+03 0°  MJ 0° 0°  MJ 1.29E+03 0°  MJ 4.66E+03 0°  MJ 0° 0°  MJ 4.66E+03 0°  MJ 0° 0°  MJ 0° 0°  MJ 0° 0°  MJ 0° 0°  Kg 0° 0°  kg 3.98E+00 0°  kg 3.05E+01 0°  kg 0° 0°	Unit         [B1 - B7] - Use         [B1]         [B2]           MJ         1.29E+03         0°         0°           MJ         1.29E+03         0°         0°           MJ         4.66E+03         0°         0°           MJ         0°         0°         0°           MJ         4.66E+03         0°         0°           MJ         0°         0°         0°           kg         3.98E+00         0°         0°           kg         3.05E+01         0°         0°           kg         0°         0°         0°      <	Unit         [B1 - B7] - Use         [B1]         [B2]         [B3]           MJ         1.29E+03         0°         0°         0°           MJ         1.29E+03         0°         0°         0°           MJ         4.66E+03         0°         0°         0°           MJ         4.66E+03         0°         0°         0°           MJ         0°         0°         0°         0°           kg         3.98E+00         0°         0°         0°           kg         3.05E+01         0°         0°         0°           kg         0°         0°         0°         0°           kg         0°         0°         0°	MJ 1.29E+03 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0°	MJ 1.29E+03 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0°	Unit         [B1-B7]- Use         [B1]         [B2]         [B3]         [B4]         [B5]         [B6]           MJ         1.29E+03         0°         1.29E+03         0°         0°         0°         0°         0°         0°         0°         1.29E+03         0°         0°         0°         0°         0°         0°         1.29E+03         0°

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.2, database version 2023-02 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number:	ENVPEP060406EN_V4-EN	Drafting rules	PCR-4-ed4-EN-2021 09 06							
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08							
Date of issue	11-2024	Information and reference documents	www.pep-ecopassport.org							
		Validity period	5 years							
Independent verification of the d	Independent verification of the declaration and data, in compliance with ISO 14021 : 2016									
Internal X External										
The PCR review was conducted	The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)									
PEPs are compliant with XP C08	8-100-1:2016 and EN 50693:2019 or NF E38-500 :2022									
The components of the present PEP may not be compared with components from any other program.										
Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"										

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 928 298 512 €

ENVPEP060406EN\_V4-EN

www.se.com

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

11-2024