# **Product Environmental Profile**

### **Harmony XA2 Pilot Light**





ENVPEP2308019\_V1 10/2023

## General information


Reference product	Harmony XA2 Pilot Light - XA2EVM3LC
Description of the product	Pilot light is also used for an electrical indicator light that illuminates to show that electrical power is available or that an electrical device is operating.
Functional unit	XB2 monolithic green pilot light comes with integral LED which provides clear visual feedback on the status of machines. Pilot lights helps to know when a machines process has started or stopped to keep workers safe and equipment operating smoothly. Product has power consumption of 3.45W with 71% of use rate during 10 years of life time and adhering with internaional standard IFC 80047.5.1



#### **Constituent materials**

Reference product mass

23 g including the product, its packaging and additional elements and accessories

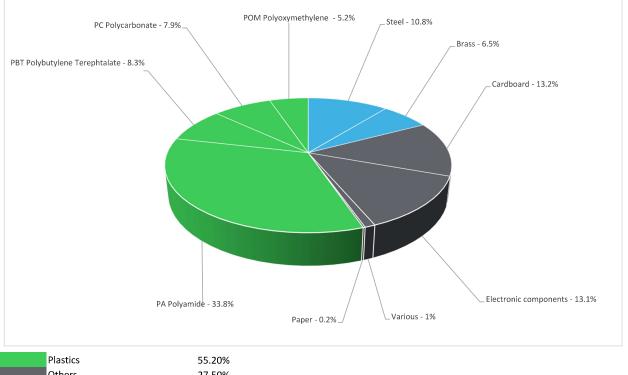

Plastics 55.20%
Others 27.50%
Metals 17.30%

## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="https://www.se.com/ww/en/work/support/green-premium/">https://www.se.com/ww/en/work/support/green-premium/</a>

## (1) Additional environmental information

End Of Life

Recyclability potential:

20%

Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

ENVPEP2308019\_V1 10/2023

## ☑ Environmental impacts

Reference service life time	10 years					
Product category	Other equipments - Active product					
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.					
Use scenario	The product is in active mode 71% of the time with a power use of 3.45W and in stand-by mode 29% of the time with a power use of 0 W for 10 years					
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product)					
Geographical representativeness	China					
	[A1 - A3]	[A5]	[B6]	[C1 - C4]		
Energy model used	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN		

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - ${\bf Country\ Customer\ Care\ Center\ \ -\ http://www.schneider-electric.com/contact}$ 

Mandatory Indicators				Harmony XA	2 Pilot Light - XA	2EVM3LC		
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 <b>-</b> B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	1.88E+02	7.68E-01	0*	0*	1.87E+02	4.33E-02	-2.36E-02
Contribution to climate change-fossil	kg CO2 eq	1.88E+02	7.67E-01	0*	0*	1.87E+02	4.33E-02	-2.34E-02
Contribution to climate change-biogenic	kg CO2 eq	2.81E-02	9.68E-04	0*	2.47E-04	2.69E-02	0*	-2.66E-04
Contribution to climate change-land use and land use char	ge kg CO2 eq	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.20E-06	1.31E-07	0*	3.68E-10	1.07E-06	1.74E-10	-3.89E-09
Contribution to acidification	mol H+ eq	1.41E+00	5.33E-03	0*	0*	1.40E+00	0*	-1.27E-04
Contribution to eutrophication, freshwater	kg (PO4)³¯eq	4.28E-05	3.18E-06	0*	4.02E-08	3.95E-05	0*	-1.04E-07
Contribution to eutrophication marine	kg N eq	1.50E-01	5.27E-04	0*	0*	1.50E-01	0*	-1.77E-05
Contribution to eutrophication, terrestrial	mol N eq	1.70E+00	5.59E-03	0*	0*	1.70E+00	0*	-1.77E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	5.03E-01	1.86E-03	0*	0*	5.01E-01	0*	-5.76E-05
Contribution to resource use, minerals and metals	kg Sb eq	4.57E-05	4.33E-05	0*	0*	2.40E-06	0*	-3.98E-06
Contribution to resource use, fossils	MJ	3.04E+03	1.32E+01	0*	0*	3.03E+03	8.43E-01	-3.76E-01
Contribution to water use	m3 eq	8.41E+00	1.39E-01	0*	2.38E-03	8.26E+00	7.00E-03	-1.12E-02

Additional indicators for the French regulation are available as v	vell							
Inventory flows Indicators	Harmony XA2 Pilot Light - XA2EVM3LC							
Inventory flows	Unit	Total	Manufact. [A1 - A3]	Distribution [A4]	Installation [A5]	Use [B1 - B7]	End of Life [C1 - C4]	Loads and Benefits [D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.21E+02	6.57E-01	0*	0*	3.20E+02	0*	3.06E-02
Contribution to use of renewable primary energy resources used as raw material	MJ	6.07E-02	6.07E-02	0*	0*	0*	0*	-5.51E-02
Contribution to total use of renewable primary energy resources	MJ	3.21E+02	7.17E-01	0*	0*	3.20E+02	0*	-2.45E-02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.04E+03	1.28E+01	0*	0*	3.03E+03	8.43E-01	-3.76E-01
Contribution to use of non renewable primary energy resources used as raw material	MJ	4.07E-01	4.07E-01	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	3.04E+03	1.32E+01	0*	0*	3.03E+03	8.43E-01	-3.76E-01
Contribution to use of secondary material	kg	1.37E-03	1.37E-03	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.96E-01	3.23E-03	0*	5.53E-05	1.92E-01	1.63E-04	-2.61E-04
Contribution to hazardous waste disposed	kg	6.19E+00	4.83E-01	0*	0*	5.69E+00	2.30E-02	-3.08E-01
Contribution to non hazardous waste disposed	kg	3.47E+01	2.00E+00	0*	1.81E-02	3.26E+01	1.04E-02	-8.98E-02
Contribution to radioactive waste disposed	kg	2.77E-03	1.43E-03	0*	2.43E-06	1.34E-03	4.70E-07	-8.70E-06
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	6.94E-03	0*	0*	3.06E-03	0*	3.88E-03	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

ENVPEP2308019\_V1 10/2023 Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2308019_V1	Drafting rules	PEP-PCR-ed4-2021 09 06				
		Supplemented by	PSR-0005-ed2-2016 03 29				
Date of issue	10/2023	Information and reference documents	www.pep-ecopassport.org				
		Validity period	5 years				
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016							
Internal X External							
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)							
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019							
The elements of the present PEP cannot be compared with elements from another program.							
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »							

Schneider Electric Industries SAS

Country Customer Care Center

http://www.schneider-electric.com/contact
35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

ENVPEP2308019\_V1 ©2023 - Schneider Electric – All rights reserved

10/2023

ENVPEP2308019\_V1 10/2023

 $<sup>^{\</sup>star}$  represents less than 0.01% of the total life cycle of the reference flow