

Product Environmental Profile

Network switch, Modicon Networking, standard unmanaged, 8 ports for copper

ConneXium - Ethernet



Schneider
Electric




General information

Reference product	Network switch, Modicon Networking, standard unmanaged, 8 ports for copper - MCSESU083FN0
Description of the product	This unmanaged switch comes with Ethernet TCP/IP protocol and with 8 transmission ports for copper cable. It provides simple connectivity for multiple Ethernet devices and gives customers more options with industrial grade application.
Description of the range	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology. The ConneXium - Ethernet range offers simple connectivity for multiple Ethernet devices. It features shielded connectors suitable for small isolated networks or low-traffic systems and low-complexity networks.
Functional unit	To Interconnect equipments with a power consumption of 1,5 W and a nominal voltage between 12 V and 24 V DC at 100% use rate for 10 years.
Specifications are:	Maximum cable distance between devices: 100 m copper cable [Us] supply voltage: 12 to 24 V Supply voltage limits: 9,6 to 32 V DC SELV Power consumption: 1,5 W Electrical connection: 3-way pluggable connector power supply Mounting bracket: 35 mm symmetrical DIN rail



Constituent materials

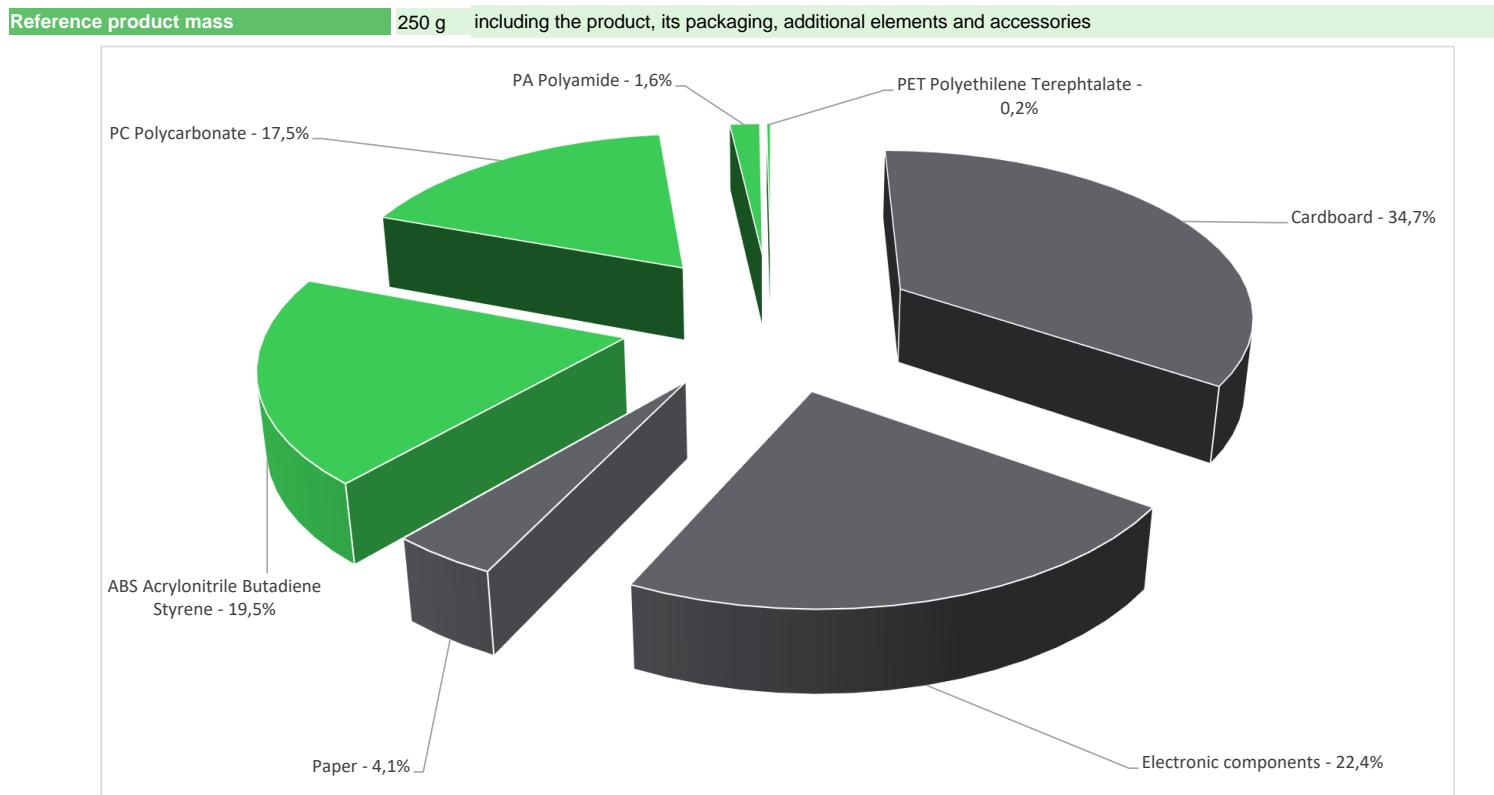

Plastics	38,8%
Others	61,2%



Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website

<https://www.se.com>



Additional environmental information

End Of Life	Recyclability potential:	0%	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	----	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



Environmental impacts

Reference service life time	10 years			
Product category	Copper telecom accessory - Automation			
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study			
Electricity consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligible consumption			
Installation elements	This product does not require any installation operations.			
Use scenario	This dissipated power is 1,5 W for the product during 100 % uptime over a 10-year service life.			
Time representativeness	The collected data are representative of the year 2025			
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are similar and representative of the actual type of technologies used to make the product.			
Geographical representativeness	Final assembly site	Use phase	End-of-life	
	Germany	United States (US), Europe (EU-27), Asia Pacific (APAC), India (IN)	United States (US), Europe (EU-27), Asia Pacific (APAC), India (IN)	
Energy model used	[A1 - A3]	[A5]	[B6]	
	Electricity Mix; Low voltage; 2020; Europe, EU-27	No energy used	Electricity Mix; Low voltage; 2020; United States, US Electricity Mix; Low voltage; 2020; Europe, EU-27 Electricity Mix; Low voltage; 2020; France, FR Electricity Mix; Low voltage; 2020; United Kingdom, GB Electricity Mix; Low voltage; 2020; Asia Pacific, APAC India, IN	Global, European and French datasets are used.

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.se.com/contact>

Mandatory Indicators		Network switch, Modicon Networking, standard unmanaged, 8 ports for copper - MCSESU083FN0						
Impact Indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	1,31E+02	1,50E+00	3,99E-02	0*	1,29E+02	4,55E-01	1,30E-02
Contribution to climate change-fossil	kg CO2 eq	1,29E+02	1,65E+00	3,99E-02	0*	1,27E+02	4,55E-01	1,56E-01
Contribution to climate change-biogenic	kg CO2 eq	1,14E+00	0*	0*	0*	1,29E+00	0*	-1,43E-01
Contribution to climate change-land use and land use change	kg CO2 eq	6,87E-05	6,87E-05	0*	0*	0*	0*	0,00E+00
Contribution to ozone depletion	kg CFC-11 eq	6,66E-07	6,80E-08	0*	1,54E-10	5,97E-07	3,86E-10	6,90E-09
Contribution to acidification	mol H+ eq	7,25E-01	1,15E-02	2,67E-04	0*	7,12E-01	3,04E-04	7,75E-04
Contribution to eutrophication, freshwater	kg P eq	2,72E-04	1,11E-05	0*	0*	2,60E-04	1,40E-06	2,88E-06
Contribution to eutrophication, marine	kg N eq	8,50E-02	1,35E-03	1,26E-04	2,46E-05	8,34E-02	1,42E-04	2,19E-04
Contribution to eutrophication, terrestrial	mol N eq	1,09E+00	1,62E-02	1,38E-03	2,51E-04	1,07E+00	1,52E-03	1,87E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	2,78E-01	4,47E-03	3,50E-04	6,02E-05	2,73E-01	3,66E-04	5,12E-04
Contribution to resource use, minerals and metals	kg Sb eq	1,67E-03	1,64E-03	0*	0*	2,35E-05	0*	2,99E-08
Contribution to resource use, fossils	MJ	2,98E+03	3,37E+01	5,57E-01	0*	2,94E+03	5,85E-01	2,25E+00
Contribution to water use	m3 eq	8,23E+00	6,57E-01	0*	9,23E-03	7,54E+00	2,43E-02	5,44E-02

Inventory flows Indicators		Network switch, Modicon Networking, standard unmanaged, 8 ports for copper - MCSESU083FNO							
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to renewable primary energy used as energy	MJ	4,14E+02	3,77E+00	0*	0*	4,10E+02	0*	-3,65E-01	
Contribution to renewable primary energy used as raw material	MJ	2,17E-01	2,17E-01	0*	0*	0*	0*	1,78E+00	
Contribution to total renewable primary energy	MJ	4,14E+02	3,98E+00	0*	0*	4,10E+02	0*	1,41E+00	
Contribution to non renewable primary energy used as energy	MJ	2,97E+03	2,92E+01	5,57E-01	0*	2,94E+03	5,85E-01	2,13E+00	
Contribution to non renewable primary energy used as raw material	MJ	4,52E+00	4,52E+00	0*	0*	0*	0*	1,20E-01	
Contribution to total non renewable primary energy	MJ	2,98E+03	3,37E+01	5,57E-01	0*	2,94E+03	5,85E-01	2,25E+00	
Contribution to use of secondary material	kg	1,21E-01	1,21E-01	0*	0*	0*	0*	0,00E+00	
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to net use of fresh water	m³	1,92E-01	1,53E-02	0*	2,15E-04	1,76E-01	5,67E-04	1,27E-03	
Contribution to hazardous waste disposed	kg	9,51E+00	6,21E+00	0*	0*	3,24E+00	6,17E-02	1,51E-02	
Contribution to non hazardous waste disposed	kg	2,10E+01	4,41E-01	0*	1,00E-01	2,03E+01	1,06E-01	6,87E-02	
Contribution to radioactive waste disposed	kg	3,78E-03	1,98E-04	9,98E-07	0*	3,57E-03	4,32E-06	3,22E-05	
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to materials for recycling	kg	1,19E-02	1,19E-02	0*	0*	0*	0*	0,00E+00	
Contribution to materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to exported energy	MJ	4,59E-06	4,59E-06	0*	0*	0*	0*	0,00E+00	

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0,00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 2,90E-02

* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators		Network switch, Modicon Networking, standard unmanaged, 8 ports for copper - MCSESU083FNO							
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	1,29E+02	0*	0*	0*	0*	0*	1,29E+02	0*
Contribution to climate change-fossil	kg CO2 eq	1,27E+02	0*	0*	0*	0*	0*	1,27E+02	0*
Contribution to climate change-biogenic	kg CO2 eq	1,29E+00	0*	0*	0*	0*	0*	1,29E+00	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	5,97E-07	0*	0*	0*	0*	0*	5,97E-07	0*
Contribution to acidification	mol H+ eq	7,12E-01	0*	0*	0*	0*	0*	7,12E-01	0*
Contribution to eutrophication, freshwater	kg P eq	2,60E-04	0*	0*	0*	0*	0*	2,60E-04	0*
Contribution to eutrophication marine	kg N eq	8,34E-02	0*	0*	0*	0*	0*	8,34E-02	0*
Contribution to eutrophication, terrestrial	mol N eq	1,07E+00	0*	0*	0*	0*	0*	1,07E+00	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	2,73E-01	0*	0*	0*	0*	0*	2,73E-01	0*
Contribution to resource use, minerals and metals	kg Sb eq	2,35E-05	0*	0*	0*	0*	0*	2,35E-05	0*
Contribution to resource use, fossils	MJ	2,94E+03	0*	0*	0*	0*	0*	2,94E+03	0*
Contribution to water use	m3 eq	7,54E+00	0*	0*	0*	0*	0*	7,54E+00	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.5-6, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2003018_V2	Drafting rules Supplemented by <i>Information and reference documents</i>	PEP-PCR-ed4-2021 09 06 PSR-0005-ed3.1-EN-2023 12 08 www.pep-ecopassport.org
Date of issue	2025-10	Validity period	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14021 : 2016</i>			
Internal	External	X	

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

Head Office

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 928 298 512 €