

Product Environmental Profile

ACTASSI-WM CABLING ENCLOSURE






General information

Reference product	ACTASSI-WM CABLING ENCLOSURE - NSYKDB9U4F
Description of the product	The main purpose of the Actassi product is to provides end to end scalable physical IP network infrastructure for Building & Data Center.The flat-pack architecture of KDB enclosure helps saving 60% of space in the stock. It is also very easy to ship and carry.
Description of the range	Single product
Functional unit	Protect people from direct contact with live active parts and ensure the grouping of control, command and protection devices in a single enclosure or cabinet having the following dimensions H x L x D or an assembly of X enclosures or cabinets having the following dimensions H x L x D, with rated current In, while protecting them against mechanical impacts (IK) and the penetration of solid objects and liquids (IP), according to the appropriate use scenario, and for the reference service life of the product of 20 years.
Specifications are:	H = 485.1 mm L = 600 mm D = 400 mm IP = IP20 conforming to IEC 60529 IK = IK08 conforming to IEC 62262



Constituent materials

Reference product mass	16238.314 g including the product, its packaging, additional elements and accessories
------------------------	---

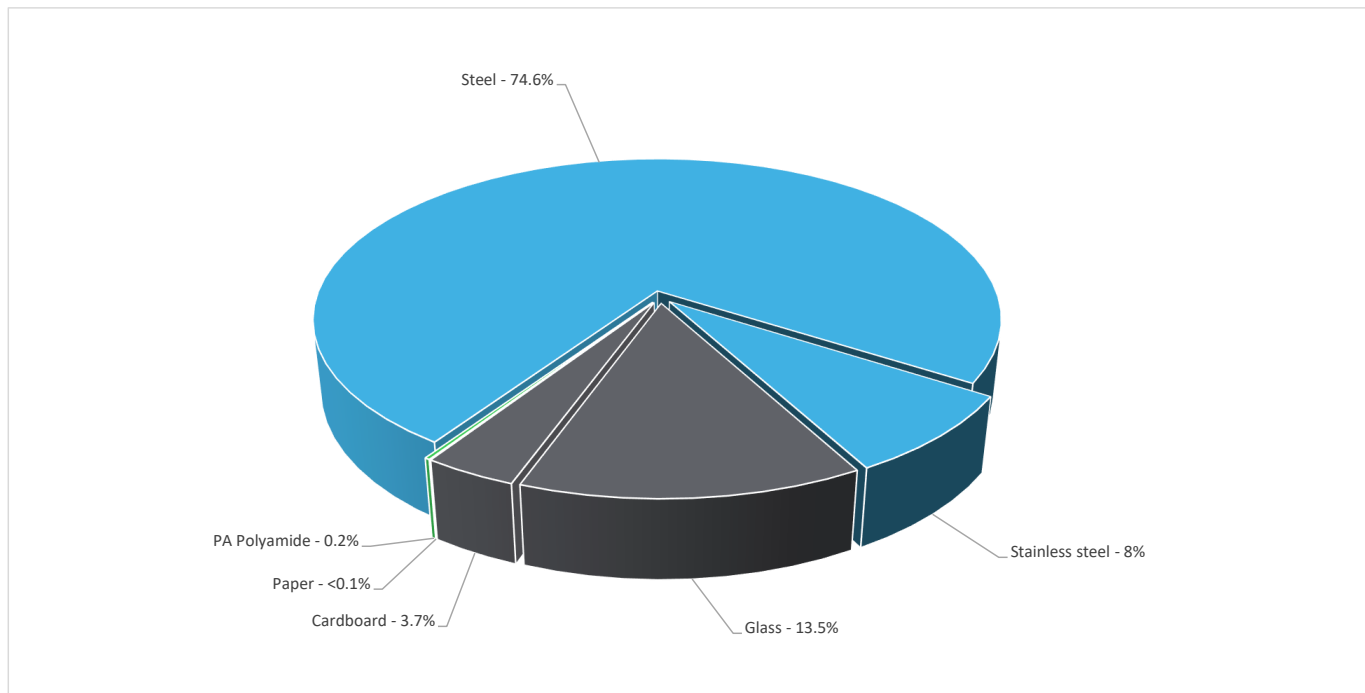

Plastics	0.2%
Metals	82.6%
Others	17.2%



Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website

<https://www.se.com>

**Additional environmental information**

End Of Life	Recyclability potential:	84%	The recyclability rate was calculated from the recycling rates of each material making up the product based on REECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	------------	---

**Environmental impacts**

Reference service life time	20 years			
Product category	Unequipped enclosures			
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study			
Electricity consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligible consumption			
Installation elements	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).			
Use scenario	There is no use scenario to be considered			
Time representativeness	The collected data are representative of the year 2025			
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are similar and representative of the actual type of technologies used to make the product.			
Geographical representativeness	Final assembly site	Use phase		End-of-life
	India	Europe		Europe
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Low voltage; 2020; India, IN	No energy used	Electricity Mix; Low voltage; 2020; Europe, EU-27	Global, European and French datasets are used.

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.se.com/contact>

Mandatory Indicators		ACTASSI-WM CABLING ENCLOSURE - NSYKDB9U4F						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	9.68E+01	6.88E+01	4.84E+00	1.4E+00	0*	2.17E+01	-4.79E+01
Contribution to climate change-fossil	kg CO2 eq	9.50E+01	6.93E+01	4.84E+00	6.62E-01	0*	2.02E+01	-4.84E+01
Contribution to climate change-biogenic	kg CO2 eq	1.82E+00	0*	0*	7.45E-01	0*	1.58E+00	5.66E-01
Contribution to climate change-land use and land use change	kg CO2 eq	7.12E-06	7.00E-07	0*	0*	0*	6.42E-06	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	7.62E-06	2.63E-06	4.28E-06	8.52E-09	0*	6.91E-07	-7.11E-06
Contribution to acidification	mol H+ eq	4.64E-01	3.33E-01	2.18E-02	1.94E-03	0*	1.08E-01	-2.87E-01
Contribution to eutrophication, freshwater	kg P eq	2.06E-04	6.66E-05	5.69E-07	1.42E-05	0*	1.25E-04	-8.21E-05
Contribution to eutrophication marine	kg N eq	8.93E-02	5.85E-02	1.01E-02	8.44E-04	0*	1.98E-02	-2.87E-02
Contribution to eutrophication, terrestrial	mol N eq	9.81E-01	6.42E-01	1.09E-01	6.04E-03	0*	2.23E-01	-3.32E-01
Contribution to photochemical ozone formation - human health	kg COVNM eq	3.04E-01	2.05E-01	3.55E-02	1.39E-03	0*	6.21E-02	-1.15E-01
Contribution to resource use, minerals and metals	kg Sb eq	1.02E-03	1.02E-03	0*	0*	0*	2.63E-06	-1.54E-02
Contribution to resource use, fossils	MJ	2.82E+03	2.47E+03	6.04E+01	6.20E+00	0*	2.84E+02	-1.13E+03
Contribution to water use	m3 eq	3.10E+01	2.78E+01	2.46E-01	5.81E-02	0*	2.90E+00	-2.08E+01

Inventory flows Indicators		ACTASSI-WM CABLING ENCLOSURE - NSYKDB9U4F							
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.40E+01	1.88E+01	0*	8.60E-01	0*	1.43E+01	-6.95E+00	
Contribution to use of renewable primary energy resources used as raw material	MJ	1.18E+01	1.18E+01	0*	0*	0*	0*	-8.56E+00	
Contribution to total use of renewable primary energy resources	MJ	4.58E+01	3.06E+01	0*	8.60E-01	0*	1.43E+01	-1.55E+01	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.82E+03	2.46E+03	6.04E+01	6.20E+00	0*	2.84E+02	-1.13E+03	
Contribution to use of non renewable primary energy resources used as raw material	MJ	9.41E-01	9.41E-01	0*	0*	0*	0*	0.00E+00	
Contribution to total use of non-renewable primary energy resources	MJ	2.82E+03	2.47E+03	6.04E+01	6.20E+00	0*	2.84E+02	-1.13E+03	
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to net use of freshwater	m³	7.47E-01	6.48E-01	5.74E-03	4.30E-03	0*	8.82E-02	-4.84E-01	
Contribution to hazardous waste disposed	kg	7.08E+01	7.06E+01	0*	1.66E-02	0*	1.82E-01	-1.22E+03	
Contribution to non hazardous waste disposed	kg	5.71E+01	3.89E+01	0*	2.89E-01	0*	1.78E+01	-4.01E+01	
Contribution to radioactive waste disposed	kg	1.55E-02	1.38E-02	9.65E-04	4.19E-05	0*	7.55E-04	-1.81E-02	
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to materials for recycling	kg	1.41E+01	1.03E+00	0*	4.76E-01	0*	1.26E+01	0.00E+00	
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to exported energy	MJ	1.61E-01	1.05E-02	0*	2.53E-02	0*	1.25E-01	0.00E+00	

* represents less than 0.01% of the total life cycle of the reference flow


Contribution to biogenic carbon content of the product kg of C 0.00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 1.63E-01

* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Life cycle assessment performed with EIME version v6.2.5-6, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00818-V02.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08
Verifier accreditation N°	0	Information and reference documents	www.pep-ecopassport.org
Date of issue	09-2025	Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2006			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)			
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022			
The components of the present PEP may not be compared with components from any other program.			
Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations"			
			

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.se.com/contact>

Head Office

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

SCHN-00818-V02.01-EN

©2024 - Schneider Electric – All rights reserved

09-2025