Product Environmental Profile

Harmony XENG contact block for pendant stations






ENVPEP2506031_V1 06-2025

General information

Reference product	Harmony XENG contact block for pendant stations - XENG1191							
Description of the product	XENG contact block is the component that opens or closes an electrical circuit when a button on the pendant is pressed or released.							
Description of the range	Single product							
Functional unit	This contact block allows fast and easy replacement and configuration of your push buttons and selector switches. It is easily installed and replaced on XACM and XACB pendant control stations and connects to control circuits with simple screw-clamp connections. It protects operators from unexpected contact with live circuits thanks to its IP20 protection index.							
	Vibration resistance : 15 gn (f= 10500 Hz) conforming to IEC 60068-2-6							
	Shock resistance : 100 gn conforming to IEC 60068-2-27							
Specifications are:	Standards : UL, CSA, IEC							
Specifications are:	Conventional enclosed thermal current : 10 A							
	[Ui] rated insulation voltage : 600 V (pollution degree 3) conforming to IEC 60947-1							
	[Uimp] rated impulse withstand voltage : 6 kV conforming to IEC 60947-1							

凼

Constituent materials

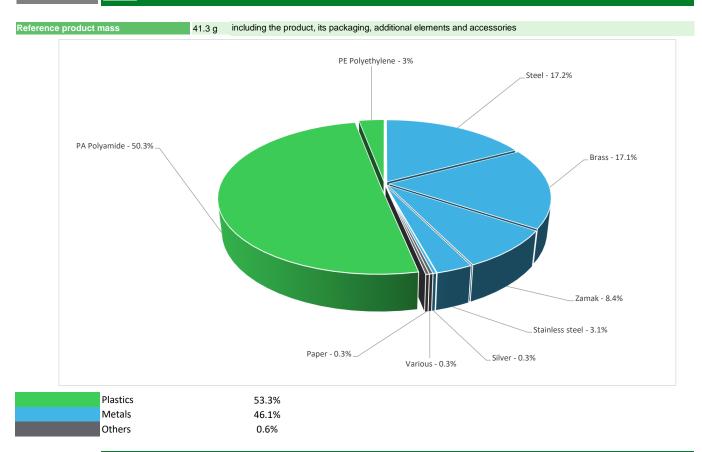

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website https://www.se.com

ENVPEP2506031_V1 06-2025

(19) Additional environmental information

End Of Life

Recyclability potential:

47%

The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Environmental impacts

Reference service life time	20 years									
Product category	Other equipments - Passive product - non-continuous operation									
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study									
Electricity consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligible consumption									
Installation elements	The product does not require any installation ope	rations								
Use scenario	The dissipated power of this product is 0.135W v	vith 30% load rate and 30% ser	viceup lifetime for 20 years							
Time representativeness	The collected data are representative of the year	The collected data are representative of the year 2024								
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are similar and representative of the actual type of technologies used to make the product.									
Geographical	Final assembly site Use phase End-of-life									
representativeness	Pisek, Czech Republic Global Global									
Energy model used	[A1 - A3] Electricity Mix; High voltage; 2020; Czech Republic, CZ	[A5] No energy used	[B6] Electricity Mix; Low voltage; 2020; Global, GLO	[C1 - C4] Global, European and French datasets are used.						

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators	Harmony XENG contact block for pendant stations - XENG1191								
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to climate change	kg CO2 eq	6.99E-01	2.77E-01	2.92E-02	3.89E-03	3.10E-01	7.88E-02	-7.71E-02	
Contribution to climate change-fossil	kg CO2 eq	6.94E-01	2.76E-01	2.92E-02	3.89E-03	3.06E-01	7.87E-02	-7.69E-02	
Contribution to climate change-biogenic	kg CO2 eq	4.67E-03	1.31E-03	0*	0*	3.27E-03	8.84E-05	-1.78E-04	
Contribution to climate change-land use and land use change	ge kg CO2 eq	9.59E-09	5.35E-10	0*	0*	0*	9.05E-09	0.00E+00	
Contribution to ozone depletion	kg CFC-11 eq	6.65E-08	3.85E-08	2.57E-08	0*	1.30E-09	1.01E-09	-1.90E-08	
Contribution to acidification	mol H+ eq	3.95E-03	2.06E-03	1.25E-04	6.80E-07	1.59E-03	1.81E-04	-4.32E-04	
Contribution to eutrophication, freshwater	kg P eq	5.98E-06	5.42E-06	3.41E-09	0*	4.78E-07	7.51E-08	-1.90E-07	
Contribution to eutrophication, marine	kg N eq	5.80E-04	2.93E-04	5.71E-05	1.67E-07	1.90E-04	3.99E-05	-4.31E-05	
Contribution to eutrophication, terrestrial	mol N eq	6.53E-03	3.00E-03	6.19E-04	2.89E-06	2.45E-03	4.58E-04	-4.90E-04	
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.93E-03	9.84E-04	2.04E-04	4.67E-07	6.22E-04	1.21E-04	-1.81E-04	
Contribution to resource use, minerals and metals	kg Sb eq	1.32E-04	1.32E-04	0*	0*	6.55E-08	0*	-1.65E-05	
Contribution to resource use, fossils	MJ	1.24E+01	5.04E+00	3.63E-01	0*	6.53E+00	4.63E-01	-1.36E+00	
Contribution to water use	m3 eq	1.68E-01	1.39E-01	1.48E-03	3.50E-04	1.89E-02	8.29E-03	-3.40E-02	

ENVPEP2506031_V1 06-2025

Inventory flows Indicators	Harmony XENG contact block for pendant stations - XENG1191								
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to renewable primary energy used as energy	MJ	1.32E+00	2.43E-01	0*	0*	1.06E+00	2.05E-02	-1.00E-02	
Contribution to renewable primary energy used as raw material	MJ	1.91E-03	1.91E-03	0*	0*	0*	0*	0.00E+00	
Contribution to total renewable primary energy	MJ	1.33E+00	2.45E-01	0*	0*	1.06E+00	2.05E-02	-1.00E-02	
Contribution to non renewable primary energy used as energy	MJ	1.17E+01	4.36E+00	3.63E-01	0*	6.53E+00	4.63E-01	-1.36E+00	
Contribution to non renewable primary energy used as raw material	MJ	6.84E-01	6.84E-01	0*	0*	0*	0*	0.00E+00	
Contribution to total non renewable primary energy	MJ	1.24E+01	5.04E+00	3.63E-01	0*	6.53E+00	4.63E-01	-1.36E+00	
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to net use of fresh water	m³	3.93E-03	3.23E-03	3.44E-05	8.15E-06	4.41E-04	2.22E-04	-7.91E-04	
Contribution to hazardous waste disposed	kg	1.80E+00	1.79E+00	0*	0*	7.20E-03	2.60E-04	-1.26E+00	
Contribution to non hazardous waste disposed	kg	2.58E-01	1.64E-01	2.97E-05	1.41E-03	4.89E-02	4.34E-02	-4.14E-02	
Contribution to radioactive waste disposed	kg	9.07E-05	7.33E-05	5.80E-06	4.23E-08	9.74E-06	1.84E-06	-1.91E-05	
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to materials for recycling	kg	1.89E-02	1.06E-03	0*	0*	0*	1.78E-02	0.00E+00	
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to exported energy	MJ	1.87E-04	1.12E-05	0*	0*	0*	1.76E-04	0.00E+00	
* represents less than 0.01% of the total life cycle of the refer	ence flow								
Contribution to biogenic carbon content of the product	kg of C	0.00E+00							
Contribution to biogenic carbon content of the associated packaging	kg of C	3.98E-05							

^{*} The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators		1	Harmony XEN	G contact	block fo	r pendan	t stations - XEN	NG1191	
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	3.10E-01	0*	0*	0*	0*	0*	3.10E-01	0*
Contribution to climate change-fossil	kg CO2 eq	3.06E-01	0*	0*	0*	0*	0*	3.06E-01	0*
ontribution to climate change-biogenic	kg CO2 eq	3.27E-03	0*	0*	0*	0*	0*	3.27E-03	0*
ontribution to climate change-land use and land use chang	e kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
ontribution to ozone depletion	kg CFC-11 eq	1.30E-09	0*	0*	0*	0*	0*	1.30E-09	0*
ntribution to acidification	mol H+ eq	1.59E-03	0*	0*	0*	0*	0*	1.59E-03	0*
ntribution to eutrophication, freshwater	kg P eq	4.78E-07	0*	0*	0*	0*	0*	4.78E-07	0*
ribution to eutrophication marine	kg N eq	1.90E-04	0*	0*	0*	0*	0*	1.90E-04	0*
ribution to eutrophication, terrestrial	mol N eq	2.45E-03	0*	0*	0*	0*	0*	2.45E-03	0*
ribution to photochemical ozone formation - human th	kg COVNM eq	6.22E-04	0*	0*	0*	0*	0*	6.22E-04	0*
ntribution to resource use, minerals and metals	kg Sb eq	6.55E-08	0*	0*	0*	0*	0*	6.55E-08	0*
ribution to resource use, fossils	MJ	6.53E+00	0*	0*	0*	0*	0*	6.53E+00	0*
ribution to water use	m3 eq	1.89E-02	0*	0*	0*	0*	0*	1.89E-02	0*

ENVPEP2506031_V1 06-2025

Inventory flows Indicators	Harmony XENG contact block for pendant stations - XENG1191								
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.06E+00	0*	0*	0*	0*	0*	1.06E+00	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
ontribution to total use of renewable primary energy sources	MJ	1.06E+00	0*	0*	0*	0*	0*	1.06E+00	0*
ntribution to use of non renewable primary energy cluding non renewable primary energy used as raw terial	MJ	6.53E+00	0*	0*	0*	0*	0*	6.53E+00	0*
tribution to use of non renewable primary energy ources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
tribution to total use of non-renewable primary energy burces	MJ	6.53E+00	0*	0*	0*	0*	0*	6.53E+00	0*
tribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
ibution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
ribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
bution to net use of freshwater	m³	4.41E-04	0*	0*	0*	0*	0*	4.41E-04	0*
ibution to hazardous waste disposed	kg	7.20E-03	0*	0*	0*	0*	0*	7.20E-03	0*
ibution to non hazardous waste disposed	kg	4.89E-02	0*	0*	0*	0*	0*	4.89E-02	0*
ibution to radioactive waste disposed	kg	9.74E-06	0*	0*	0*	0*	0*	9.74E-06	0*
bution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
oution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
bution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
ibution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

 $^{^{\}star}$ represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.3.0.1-4, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2506031_V1	Drafting rules	PEP-PCR-ed4-2021 09 06							
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08							
Date of issue	06-2025	Information and reference documents	www.pep-ecopassport.org							
		Validity period	5 years							
Independent verification of the d	Independent verification of the declaration and data, in compliance with ISO 14021: 2016									
Internal X	Internal X External									
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)										
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022										
The components of the present PEP may not be compared with components from any other program.										
Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"										

Schneider Electric Industries SAS Country Customer Care Center http://www.se.com/contact Head Office 35, rue Joseph Monier CS 30323 F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com ENVPEP2506031_V1 Published by Schneider Electric

©2024 - Schneider Electric - All rights reserved

06-2025

06-2025 ENVPEP2506031_V1