

# Product Environmental Profile

**Pro-face GP6000 Box**

**GP6000, HMI Box, DC**






## General information

Reference product	GP6000, HMI Box, DC - PFXGP6B40DI
Description of the product	PFXGP6B40DI is DIN rail mounting BOX, WVGA ~ Full HD, 2COM, 2ETH, USB, 12-24VDC, I/F expandable.
Description of the range	The products of the range are: Pro-face GP6000 Box The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	To provide DIN rail BOX during 10 years and maximum use rate at 70W, based on below function: - USB Interface (USB2.0 x 2, MicroUSB, Type C) - Ethernet interface In accordance with the relevant standards: - UL 61010 - UL C-1D2 - EN61000-6-4, EN61000-6-2 - FCC Part 15 Subpart B Class A - AS/NZS 4251.2 (EN61000-6-4) - KN61000-6-2 - EAC - IEC60079-0, IEC60079-15, IEC60079-31 - EN60079-0, EN60079-15, EN60079-31 - KCS - ABS, BV, CCS, DNV-GL, LR, NK, RINA



## Constituent materials

Reference product mass 1.97 Kg including the product, its packaging, additional elements and accessories

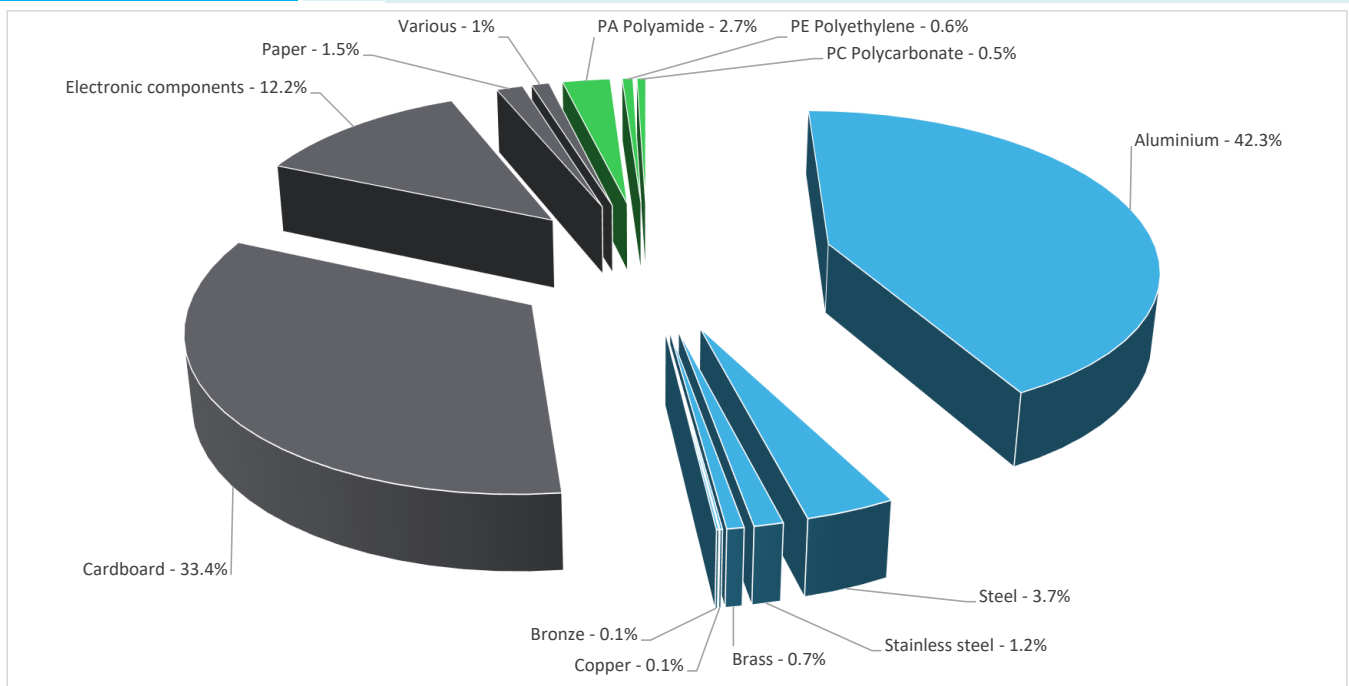

Plastics	3.80%
Metals	48.10%
Others	48.10%

## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website

<https://www.se.com>

## Additional environmental information

End Of Life	Recyclability potential:	58%	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	--

## Environmental impacts

Reference service life time	10 years			
Product category	Other equipments - Active product			
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study			
Electricity consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligible consumption			
Use scenario	The product is in active mode 100% of the time with a power use of 12W, for 10 years.			
Time representativeness	The collected data are representative of the year 2025			
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and Representative of the actual type of technologies used to make the product.			
Final assembly site	BATAM(Indonesia)			
Geographical representativeness	Rest of the World			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Low voltage; 2020; Indonesia, ID	Electricity Mix; Low voltage; 2020; France, FR Electricity Mix; Low voltage; 2020; United States, US Electricity Mix; Low voltage; 2020; Asia Pacific, APAC	Electricity Mix; Low voltage; 2020; France, FR Electricity Mix; Low voltage; 2020; United States, US Electricity Mix; Low voltage; 2020; Asia Pacific, APAC	Electricity Mix; Low voltage; 2020; France, FR Electricity Mix; Low voltage; 2020; United States, US Electricity Mix; Low voltage; 2020; Asia Pacific, APAC

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.se.com/contact>

Mandatory Indicators			GP6000, HMI Box, DC - PFXGP6B40DI						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to climate change	kg CO2 eq	6.09E+02	1.46E+02	2.85E+00	0*	4.58E+02	2.74E+00	-3.59E+00	
Contribution to climate change-fossil	kg CO2 eq	6.07E+02	1.47E+02	2.85E+00	0*	4.54E+02	2.74E+00	-3.58E+00	
Contribution to climate change-biogenic	kg CO2 eq	2.97E+00	0*	0*	0*	3.52E+00	4.01E-03	-9.04E-03	
Contribution to climate change-land use and land use change	kg CO2 eq	1.88E-05	1.84E-05	0*	0*	0*	3.91E-07	0.00E+00	
Contribution to ozone depletion	kg CFC-11 eq	2.61E-05	2.37E-05	4.35E-09	0*	2.37E-06	4.31E-08	-1.07E-06	
Contribution to acidification	mol H+ eq	3.40E+00	6.72E-01	1.85E-02	0*	2.70E+00	7.40E-03	-2.01E-02	
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	1.75E-03	3.73E-04	1.07E-06	0*	1.36E-03	1.32E-05	-1.06E-05	
Contribution to eutrophication, marine	kg N eq	4.00E-01	7.73E-02	8.64E-03	1.40E-04	3.12E-01	1.65E-03	-1.97E-03	
Contribution to eutrophication, terrestrial	mol N eq	4.72E+00	8.48E-01	9.51E-02	1.43E-03	3.76E+00	1.79E-02	-2.21E-02	
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.31E+00	2.54E-01	2.45E-02	3.43E-04	1.03E+00	4.83E-03	-8.48E-03	
Contribution to resource use, minerals and metals	kg Sb eq	1.58E-02	1.57E-02	0*	0*	8.92E-05	0*	-5.67E-04	
Contribution to resource use, fossils	MJ	1.37E+04	1.54E+03	3.96E+01	0*	1.21E+04	1.87E+01	-5.19E+01	
Contribution to water use	m3 eq	6.92E+01	4.02E+01	1.08E-02	5.22E-02	2.87E+01	2.09E-01	-1.63E+00	

Inventory flows Indicators			GP6000, HMI Box, DC - PFXGP6B40DI					
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to renewable primary energy used as energy	MJ	1.45E+03	1.14E+02	0*	0*	1.34E+03	8.76E-01	-3.74E-01
Contribution to renewable primary energy used as raw material	MJ	1.15E+01	1.15E+01	0*	0*	0*	0*	-1.70E-03
Contribution to total renewable primary energy	MJ	1.46E+03	1.26E+02	0*	0*	1.34E+03	8.76E-01	-3.76E-01
Contribution to non renewable primary energy used as energy	MJ	1.37E+04	1.53E+03	3.96E+01	0*	1.21E+04	1.87E+01	-5.19E+01
Contribution to non renewable primary energy used as raw material	MJ	7.40E+00	7.40E+00	0*	0*	0*	0*	0.00E+00
Contribution to total non renewable primary energy	MJ	1.37E+04	1.54E+03	3.96E+01	0*	1.21E+04	1.87E+01	-5.19E+01
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of fresh water	m³	1.60E+00	9.22E-01	2.51E-04	1.22E-03	6.70E-01	6.12E-03	-3.79E-02
Contribution to hazardous waste disposed	kg	3.04E+02	2.92E+02	0*	0*	1.19E+01	4.58E-01	-4.16E+01
Contribution to non hazardous waste disposed	kg	1.27E+02	4.91E+01	9.97E-02	5.71E-01	7.64E+01	1.04E+00	-1.36E+00
Contribution to radioactive waste disposed	kg	3.99E-02	2.90E-02	7.10E-05	0*	1.07E-02	5.10E-05	-6.46E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	9.08E-01	1.38E-01	0*	0*	0*	7.70E-01	0.00E+00
Contribution to materials for energy recovery	kg	1.71E-09	1.71E-09	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	8.73E-03	1.12E-03	0*	0*	0*	7.61E-03	0.00E+00

\* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0.00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 1.62E-01

\* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Life cycle assessment performed with EIME version v6.3.0, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2505027_V1	Drafting rules	PCR-4-ed4-EN-2021 09 06
Date of issue	06-2025	Supplemented by	PSR-0005-ed3.1-EN-2023 12 08
		Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years

Independent verification of the declaration and data, in compliance with ISO 14021 : 2016

Internal  External

The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)

PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022

The components of the present PEP may not be compared with components from any other program.

Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.se.com/contact>

35, rue Joseph Monier  
CS 30323  
F- 92500 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 928 298 512 €

[www.se.com](http://www.se.com)

ENVPEP2505027\_V1

Published by Schneider Electric

©2025 - Schneider Electric – All rights reserved

06–2025