## Product End-of-Life Instructions

ALTISTART 01 0.75 - 15 kW

Product Range
ALTISTART 01 0.75 – 15 kW

Marketing Model
ATS01N222QN and all models of Product Family: ALTISTART 01 0.75 – 15 kW



Size in mm (or m): W x H x D : 45 x 154 x 130.7 Weight (excluding packaging) in kg (or g): 560 g








## Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy:

## **Reuse** ⇒ **Depollution** ⇒ **Dismantling** ⇒ **Shredding**

The components of the products that are recommended to be depolluted (according to the WEEE 2002/96/EC list) or that are recommended to be re-used or dismantled so as to improve the material recovery or that lead to some hazards are listed, identified and located hereunder.

This ATS01 contains electrolytic capacitors which may cause <u>electrical shock</u> during the end of life treatment process. BEFORE SERVICING, REMOVE ALL POWER and <u>WAIT 15 MINUTES</u>.

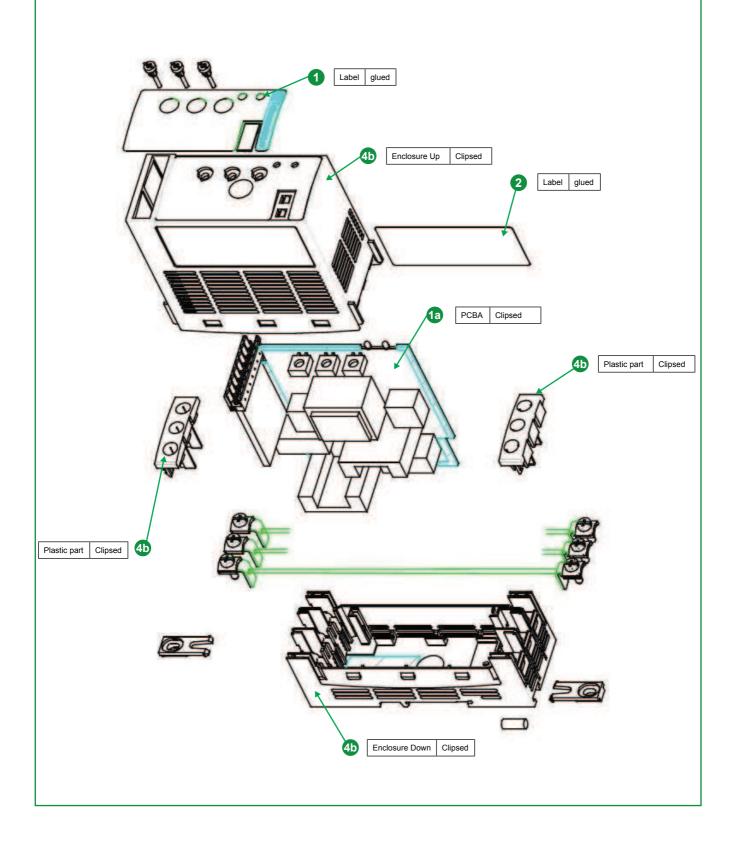

Ref.	End of life groups of components	%	Representative product weights (g)	Comments
0	PCBA	66.7	384.27	
<b>1</b> a	Heavy PCBA (power)	66.7	(384.27)	To be removed following WEEE directive
10	Light PCBA (Com)	0	(-)	To be removed following WEEE directive
2	Ferrous	2.7	15.64	
2a	Electroplated coated sheet metal	0	(-)	
2b	Hot dip coated sheet metal	0	(-)	
2c	Painted sheet metal	0	(-)	
2d	Steel and its alloys	2.7	(15.64)	
3	Non-ferrous	0	(-)	
3a	Copper and its alloys	0	(-)	
<u>3b</u>	Brass and its alloys	0	(-)	
3c	Aluminium and its alloys	0	(-)	
4	Plastics	25.7	148.09	
<b>4</b> a	Plastics with brominated FR	0	(-)	To be removed following WEEE directive
<b>4</b> b	Plastics without brominated FR	25.7	(148.09)	
5	Coils (Copper or aluminium)	0	-	
6	Wire cables	4.8	27.79	
6a	Copper conductor cables	0,9	(27.79)	
<b>6</b> b	Aluminium conductor cables	0	(-)	
7	Complex parts	0	(-)	
7a	Fans	0	(-)	
<b>7</b> b	Power modules (IGBT)	0	(-)	
<b>7</b> C	Terminal blocks	0	(-)	
<b>7</b> d	Circuit breakers	0	(-)	
7e	Others (ZCT, Keypad,)	0	(-)	
8	Capacitors (PCB free)	0	(-)	To be removed following WEEE directive
9	Other	0	(-)	
9a	Insulation sheets	0	(-)	
<b>9</b> b	Ferrites	0	(-)	
9c	Conductive sheet / elastomers	0	(-)	
	TOTAL	100%	575.79 g	

Schneider Electric Industries SAS

35, rue Joseph Monier CS30323 F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 € www.schneider-electric.com The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V1.

Publication : Schneider Electric