



# Product End-of-Life Instructions

**AUXILIAIRE OF-SD/OF (C60/120)**

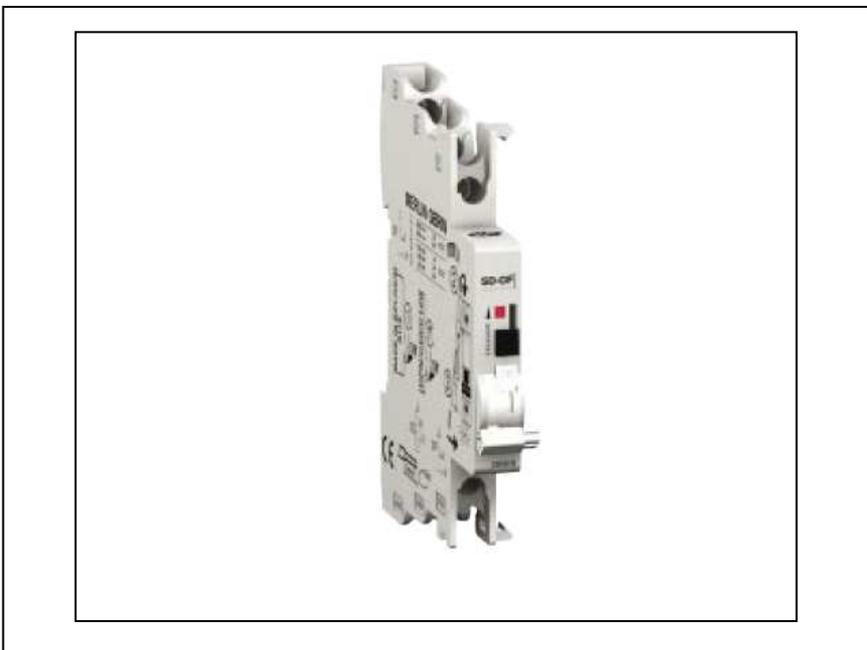

**Schneider**  
Electric

# Product End-of-Life Instructions – EoLI

## Product overview

**Product Range:** AUX-ACC-C60

**Marketing Model/Name:** Double SD-OF fault contact

**Size:** H x L x D in mm = **90 x 9 x 66**

**Weight** in g = **51.2**

## Purpose

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

## Operations recommended for the end of life treatment


There are several steps to process the products at the end of life so as to recover components, materials or energy :

**Reuse → Separation for special treatment → Other dismantling → Shredding**

## Product End-of-Life Instructions – EoLI

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

Components which must be cleared of pollution:

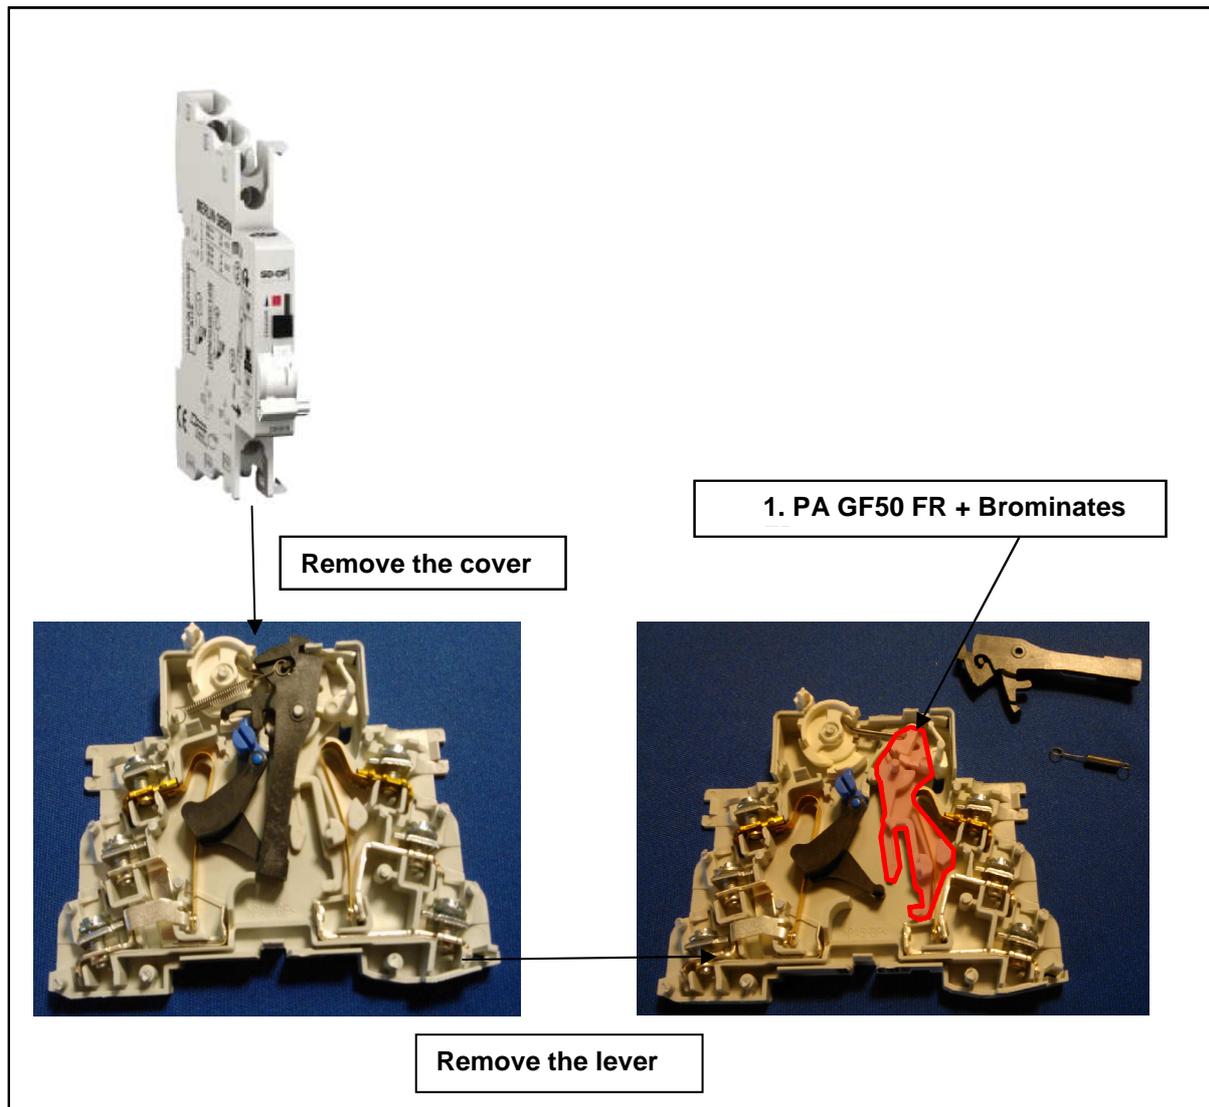

Recommendation	Number on drawing	Components	Weight (in g)	Comment
Special treatment	1	Plate	1.58	Brominates flame retardants

EoLI achieved with Schneider-Electric TT03 V5 procedure

### Schneider Electric Industries SAS

35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)