


Product End of Life Instructions

Motor Breaker GV4P Thermal-Magnetic 115A 50kA Everlink



 **Potential disassembly risks**

DANGER / PELIGRO / DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Replace cover and lug cover before energizing.

Failure to follow these instructions will result in death or serious injury.

PELIGRO DE DESCARGA ELECTRICA, EXPLOSION O DESTELLO POR ARQUEO

- Vuelva a colocar la cubierta de zapatas y la cubierta antes de energizar.


El incumplimiento de estas instrucciones podrá causar la muerte o lesiones serias.

RISQUE D'ÉLECTROCUTION, D'EXPLOSION OU D'ÉCLAIR D'ARC

- Replacer le couvercle des cosses et le couvercle avant de mettre sous tension.

Si ces directives ne sont pas respectées, cela entrainera la mort ou des blessures graves.

 **End of Life Instructions**

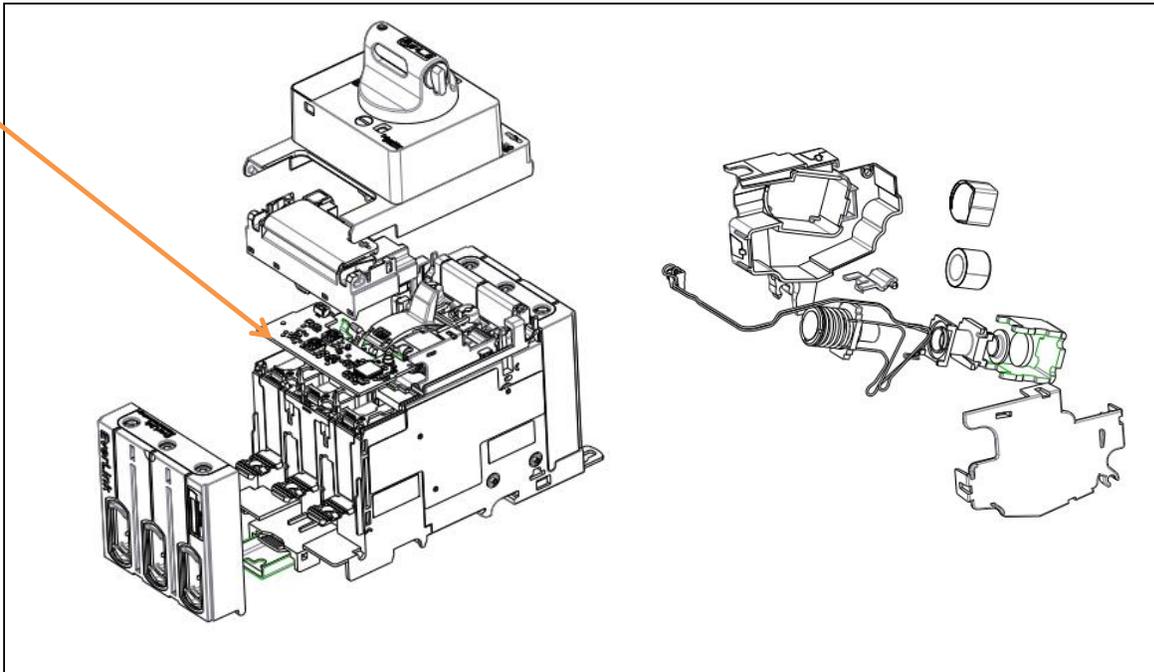

Recommendation	Number on drawing	Component / Material	Weight (g)	Comment
To be depolluted	1	Electronic Board > 10cm ²	10	PCB TRIP UNIT ME4 BASIC



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The Motor Breaker GV4P 3 poles circuit breaker equipped with a thermal magnetic trip unit is designed to provide protection against overloads and short-circuits for electrical motors with assigned voltage up to 690VAC and rated current of 115A.
Product reference	GV4P115N
Additional similar product references	GV4P115N
Total representative product mass	1600 g
Representative product dimensions	155 x 81 x 165
Accessories	0
Date of information release	07/2017



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	0	
Recyclability potential	48%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

Published by Schneider Electric

ENVEOLI1704004_V1

© 2016 - Schneider Electric – All rights reserved

07/2017