


Product End of Life Instructions

Compact NSX400N 3P3T Circuit Breaker with Micrologic 2.3 Trip unit and Motor Mechanism MT400/630



Potential disassembly risks


The Motor mechanism must be in OFF position and DISCHARGED state before starting dismantling operations.

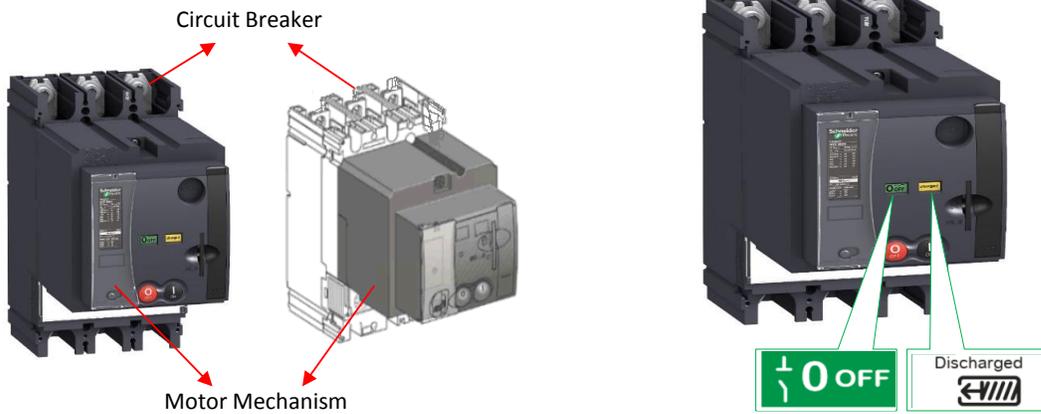


Even when the mechanism is in OFF position and discharged state, **the energy spring remains under compression.**

For safety reasons, the entire mechanism must be removed from the basic frame **without dismantling the spring.**

End of Life Instructions

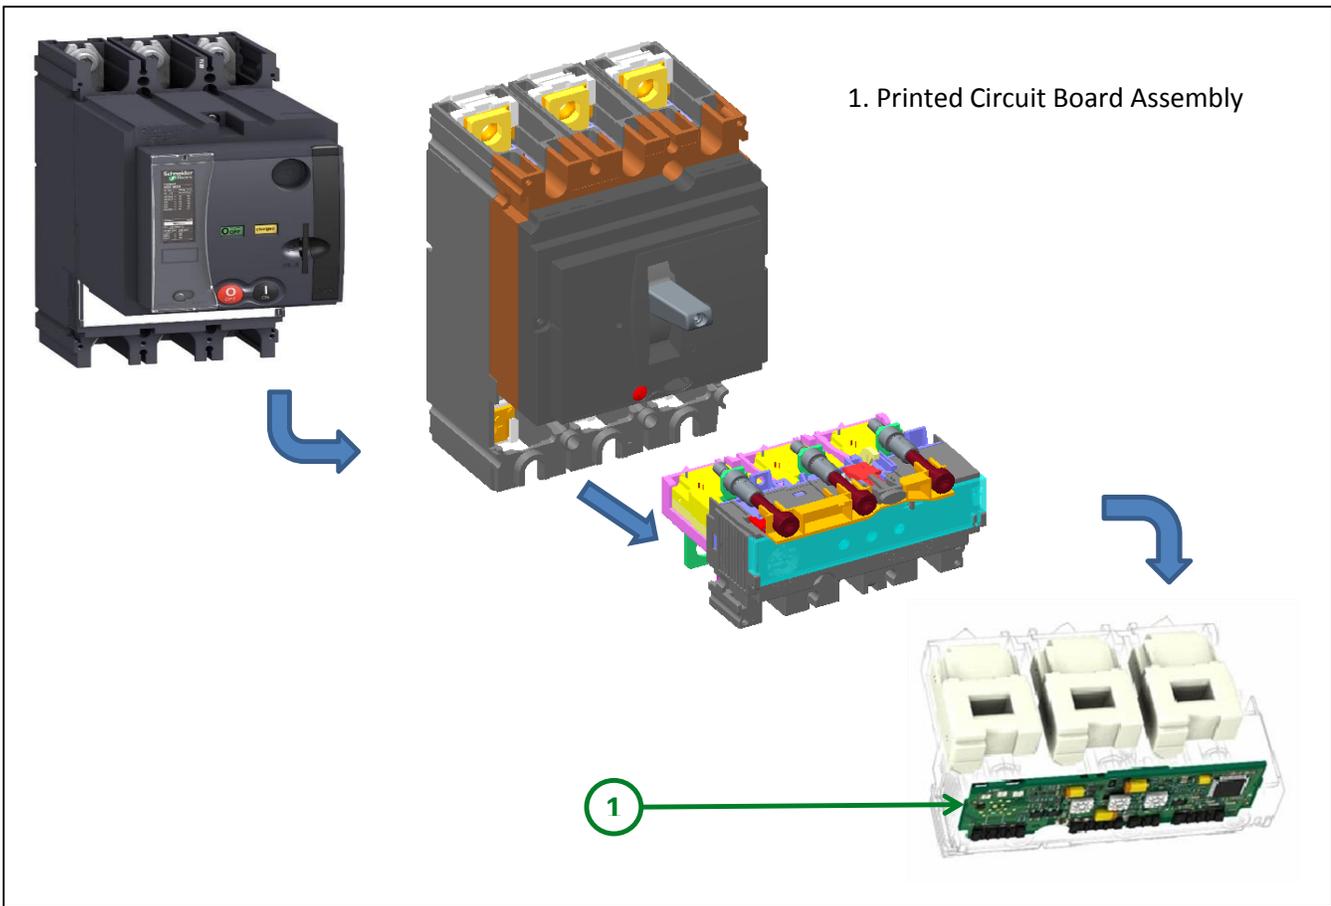

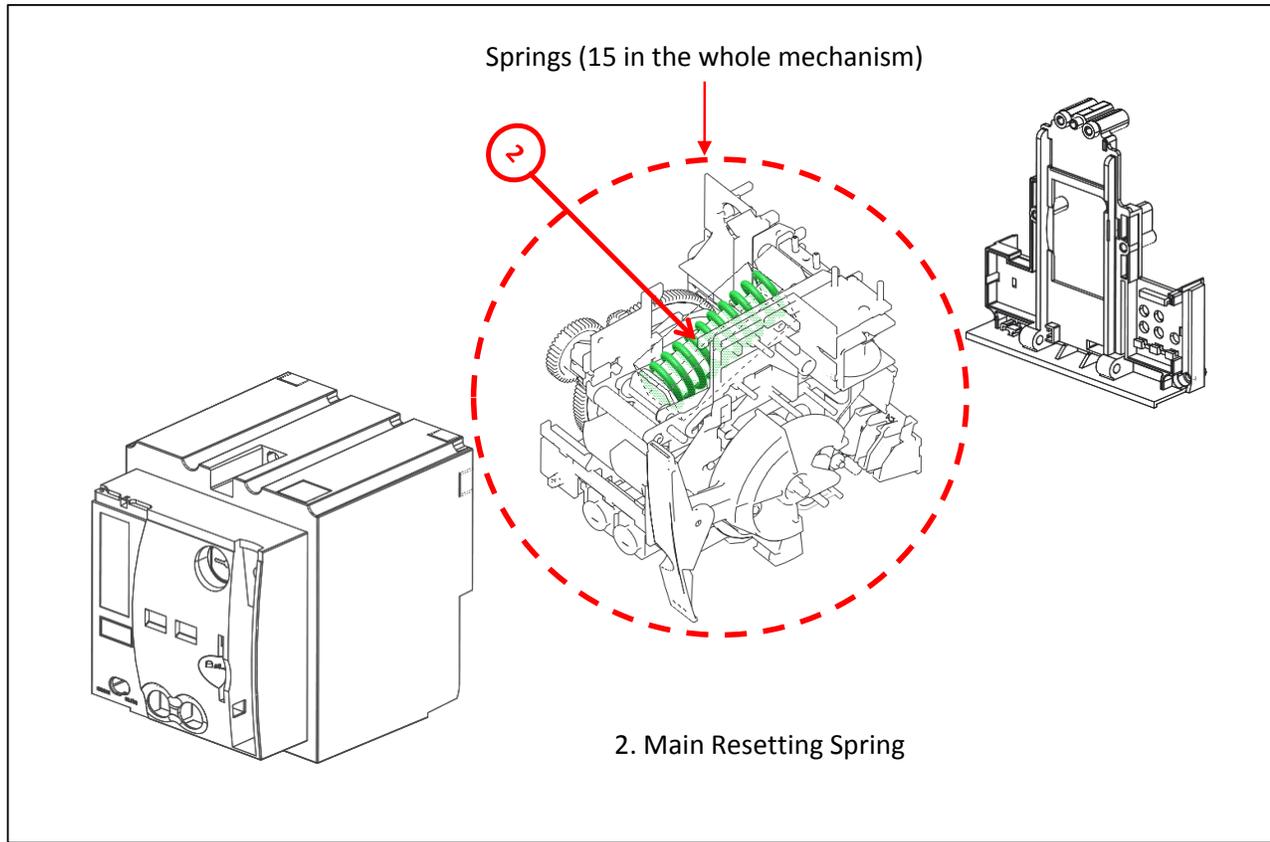

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Printed Circuit Board Assembly	35,00	Micrologic Unit
Potential hazards	2	Energy Springs		For safety reasons the energy springs must not be dismantled. The entire mechanism can be put in a shredding machine as is

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	This product (Circuit Breaker with Motor mechanism) is having combination of functions. The Compact NSX400N 3 pole circuit breaker equipped with Micrologic 2.3 trip units is designed to provide protection against overloads and short-circuits for industrial and commercial electrical distribution systems with assigned voltage upto 690VAC and rated current of 400A. The Motor mechanism module is designed to control, operate, Open, Close and Reset the circuit breakers by manually or electrical remote order.
Product reference	LV432693 & LV432641
Total representative product mass in grams	8625
Representative product dimensions	255mm x 140mm x 270mm
Date of information release	03/2017

Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	69% Based on “ECO'DEEE recyclability and recoverability calculation method” (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center

<http://www2.schneider-electric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI111002EN_V1

Published by Schneider Electric

© 2016 - Schneider Electric – All rights reserved

03/2017