


Product End of Life Instructions

Compact NSX250F 3P3T Circuit Breaker with Thermal-Magnetic (TM250D)



End of Life Instructions

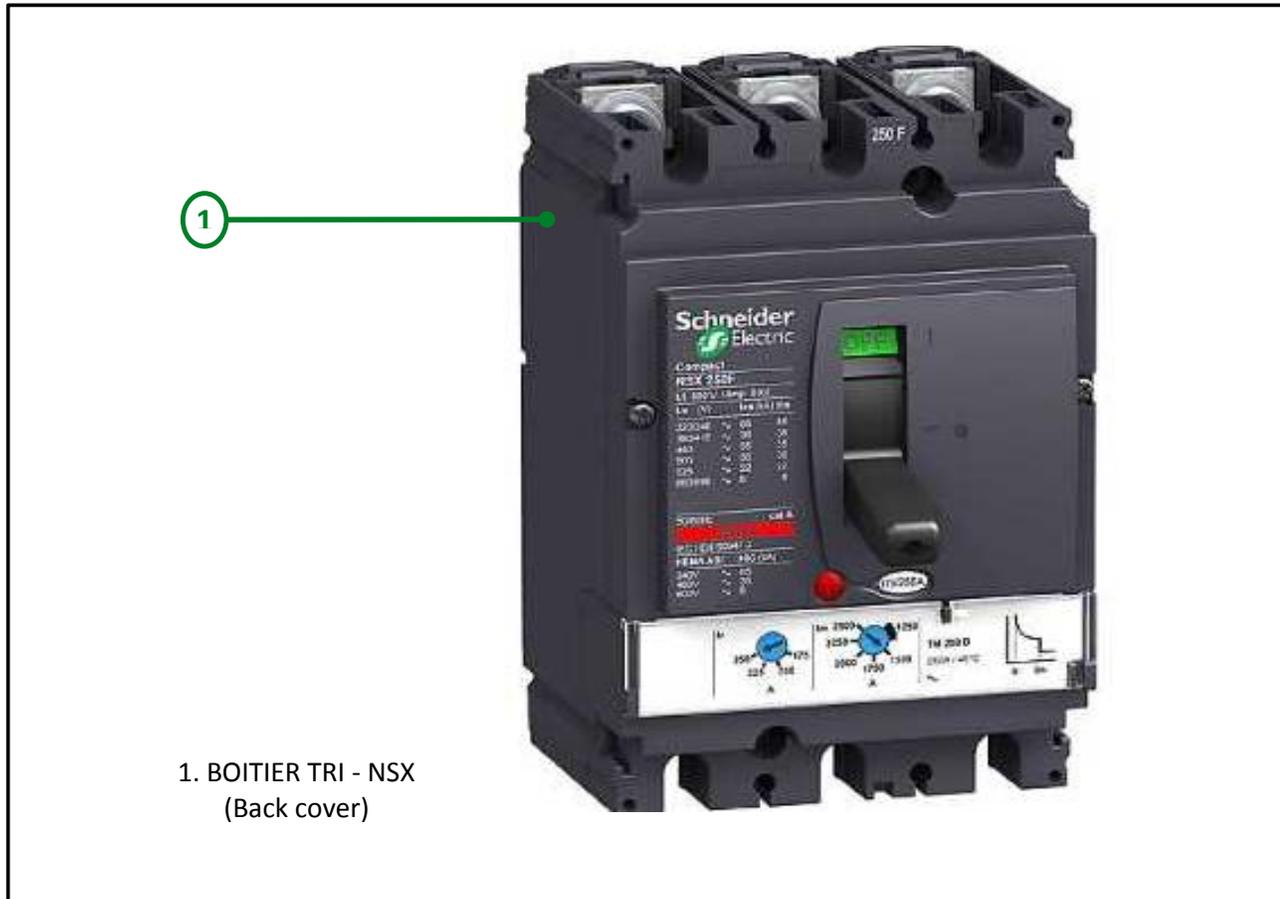

1. BOITIER TRI - NSX
(Back cover)

Recommendation	Number	Component / Material	Weight (in g)	Comments
Potential hazards	1,00	BOITIER TRI - NSX	194,0	Brominated Flame Retardant (11.6g)

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The Compact NSX250F 3 pole circuit breaker equipped with Thermal-magnetic (TM-D) trip units is designed to provide protection against overloads and short-circuits for industrial and commercial electrical distribution systems with assigned voltage upto 690VAC and rated current of 250A.
Product reference	LV431630
Total representative product mass	1929 g
Representative product dimensions	161mm x 105mm x 86mm
Date of information release	03/2017



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
Recyclability potential	52%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center

<http://www2.schneider-electric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI1702004_V1

Published by Schneider Electric

© 2016 - Schneider Electric – All rights reserved

03/2017