Product End-of-Life Instructions

Enerlin'X IFM Modbus communication interface







Product End-of-Life Instructions – EoLI

Product overview

Product Range: Enerlin'X

Marketing Model/Name: TRV00210, LV434063, TRV00121, TRV00810

SiZe: $H \times L \times D$ in mm = 18 x 96 x 72 (TRV00210)

70.6 x 71.7 x 116 (LV434063) 96 x 96 x 30 (TRV00121)

Weight in q = 695.5

Purpose

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.


Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy:

Reuse → Separation for special treament → Other dismantling → Shredding

CAUTION: The product contains 4 PCBAs and 4 plastic parts with brominated FR which are recommended to be treated separately during the End of Life operations.

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

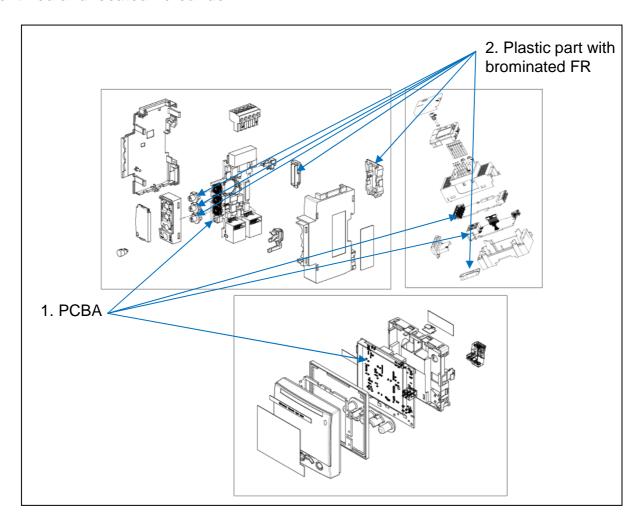

Recommendation	Number on drawing	Components	Weight (in g)	Comment
Special treatment	1	PCBA	174.9	
	2	Plastic parts with brominated FR	5.1	

EoLl achieved with Schneider-Electric TT03 V5 procedure

Schneider Electric Industries SAS 35, rue Joseph Monier CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com