

# Product End-of-Life Instructions

Product Range: Power Logic™ TM

Marketing Model/Name: METSEPM55560, METSEPM55561, METSEPM55563

## Purpose:

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.



Size in mm:


H x L x D in mm: **Ex: 96 x 96 x 89**

Weight in g: 492

## Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :  
 Reuse → Separation for special treatment → Other dismantling → Shredding.

**The components of the products that optimize the recycling performances are listed, identified and located hereunder.**

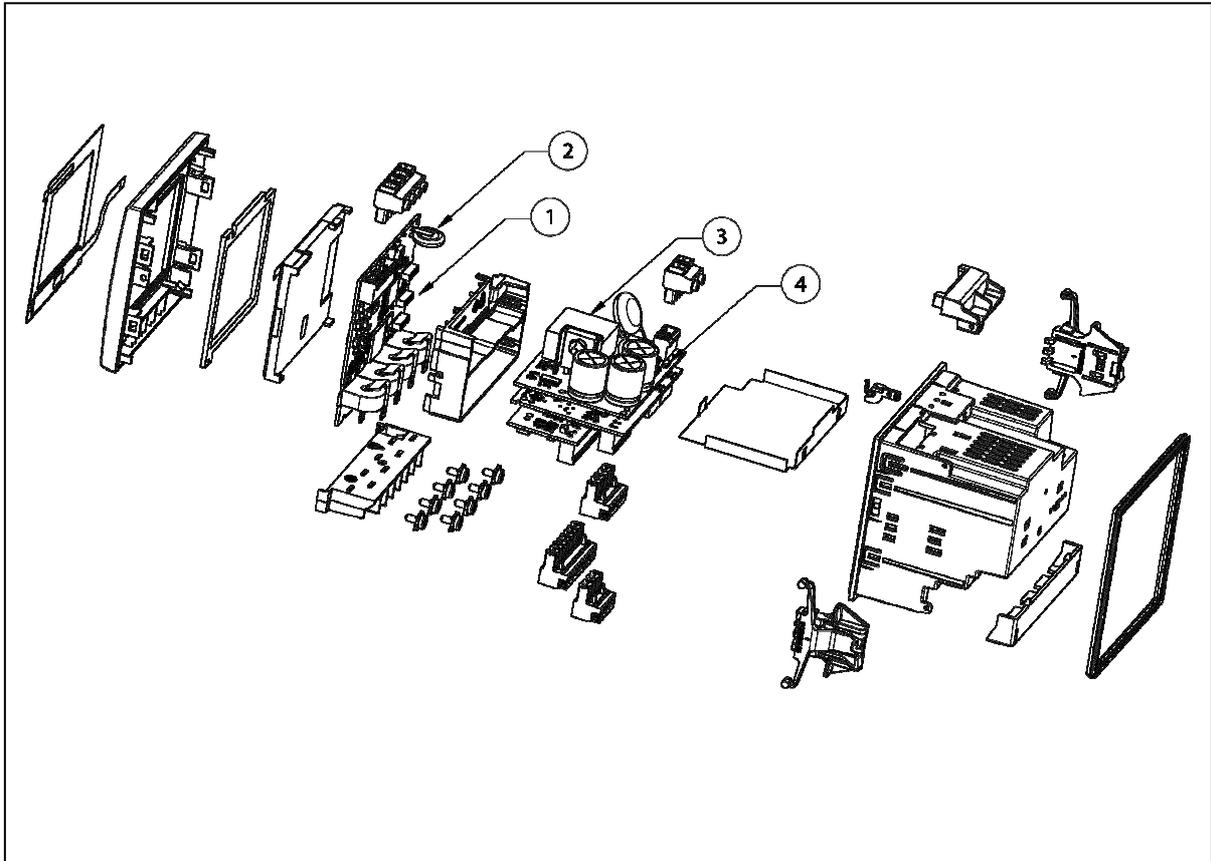

Number on drawing	Components	Weight (g)	Comment
Components listed for special treatment which improves the recycling performances			
1	Printed circuit board	57	ANALOG PCB
2	Lithium Battery	1.5	Battery, Lithium, 3.0Vdc, 120mAh Capacity, -40 to +125 Degrees C, Vertical, TH
3	Printed circuit board	99	PSU PCB
4	Diode x 4	0.3	Rectifier Diode, 500mA, 2000V (D6, D7, D8, D9)

**Schneider Electric SA**  
 43-45, boulevard Franklin Roosevelt  
 F-92500 Rueil-Malmaison Cedex (France)  
 Tel.: +33 (0) 1 41 29 70 00  
 www.schneider-electric.com

The version of the Guide used to create the document: End of Life  
 Instruction Drafting Guide of Schneider Electric version V2

ENVEOLI1310016\_V1

Publication date : 10/7/2013