

Product End of Life Instructions

EXW-EASYSIGN M30L/SA/3LFP






Potential disassembly risks



End of Life Instructions

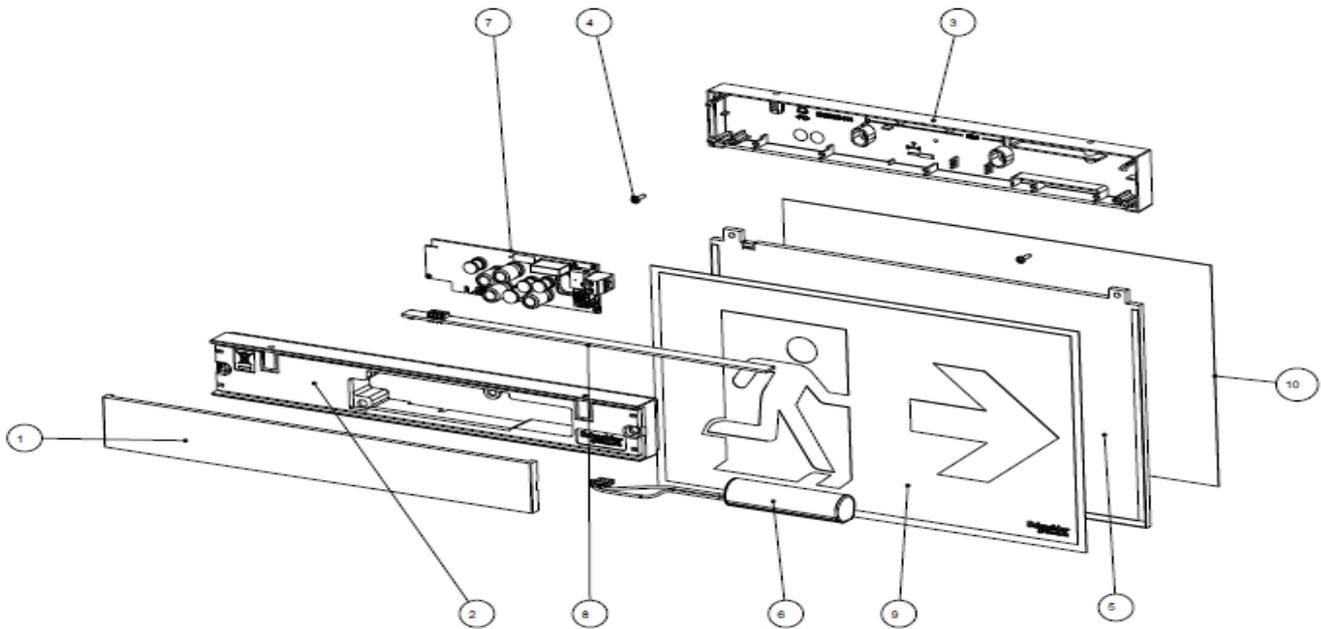

| Recommendation | Number on drawing | Component / Material | Weight (in g) | Comment |
|------------------|-------------------|--|---------------|---------|
| To be dismantled | 1 | PC (Coverage) | 26 | |
| To be dismantled | 2 | PC (CORPO ANT.PCB SPARK) | 50 | |
| To be dismantled | 3 | PC (CORPO.POST.PCB SPARK) | 50 | |
| To be dismantled | 4 | Steel (VITE AUT.TC CROCE 2X3/8) | 1 | |
| To be dismantled | 5 | PMMA (SCH.TRASP.EXW-EASYSIGN M30) | 159 | |
| To be depolluted | 6 | BATT.LFP1IFR18650E 3,2V1,5AH+NTC LCF3 | 22 | |
| To be depolluted | 7 | Electronic Board (Power) > 10cm ² | 28 | |
| To be depolluted | 8 | Electronic Board (Power) > 10cm ² (CS BAR24LED SPARK-EV/AMB ACT-D3 BHR) | 7 | |
| Other | 9 | PVC (&K.5SCH.SER/ M30) | 78 | |
| To be dismantled | 10 | Paper (NEU30 1 neu.asm) | 5 | |



Product description

| | |
|---------------------------------------|--|
| Manufacturer identification | Schneider Electric Industries SAS |
| Brand name | Schneider Electric |
| Product function | Maintained emergency luminaire (EN 60598-2-22) luminaire in which the emergency lighting lamps are energized at all times when normal or emergency lighting is required |
| Product reference | OVA38253 |
| Additional similar product references | OVA38250 OVA38251 OVA38252 |
| Total representative product mass | 375 g |
| Representative product dimensions | 260 x 200 x 30 |
| Accessories | STAFFA BAND.SLIM |
| Date of information release | 04/2021 |



Additional information

| | | |
|--|--|---|
| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. | |
| In case of special transportation: transportation method | 0 | |
| Recyclability potential | 55% | Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI2001005_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

04/2021