

Product End of Life Instructions

Altivar Machine ATV340 - variable speed drive - 4kW - 400V, Ethernet

Altivar Machine ATV340





Potential disassembly risks

The information provided in this document assumes that the product is completely de-energized and uninstalled (refer to the instructions provided in the appropriate product manuals).

Dismantling/disassembling the product may entail hazards caused by, for example, sharp edges, chemical aggression or ejected parts.


▲ WARNING

HAZARD DUE TO INSUFFICIENT PROTECTION

- Implement all safety measures required by the applicable regulations and by the processes used to dismantle/disassemble and dispose of the product.
- Use all necessary personal protective equipment such as gloves and goggles.

Failure to follow these instructions can result in death or serious injury.

End of Life Instructions

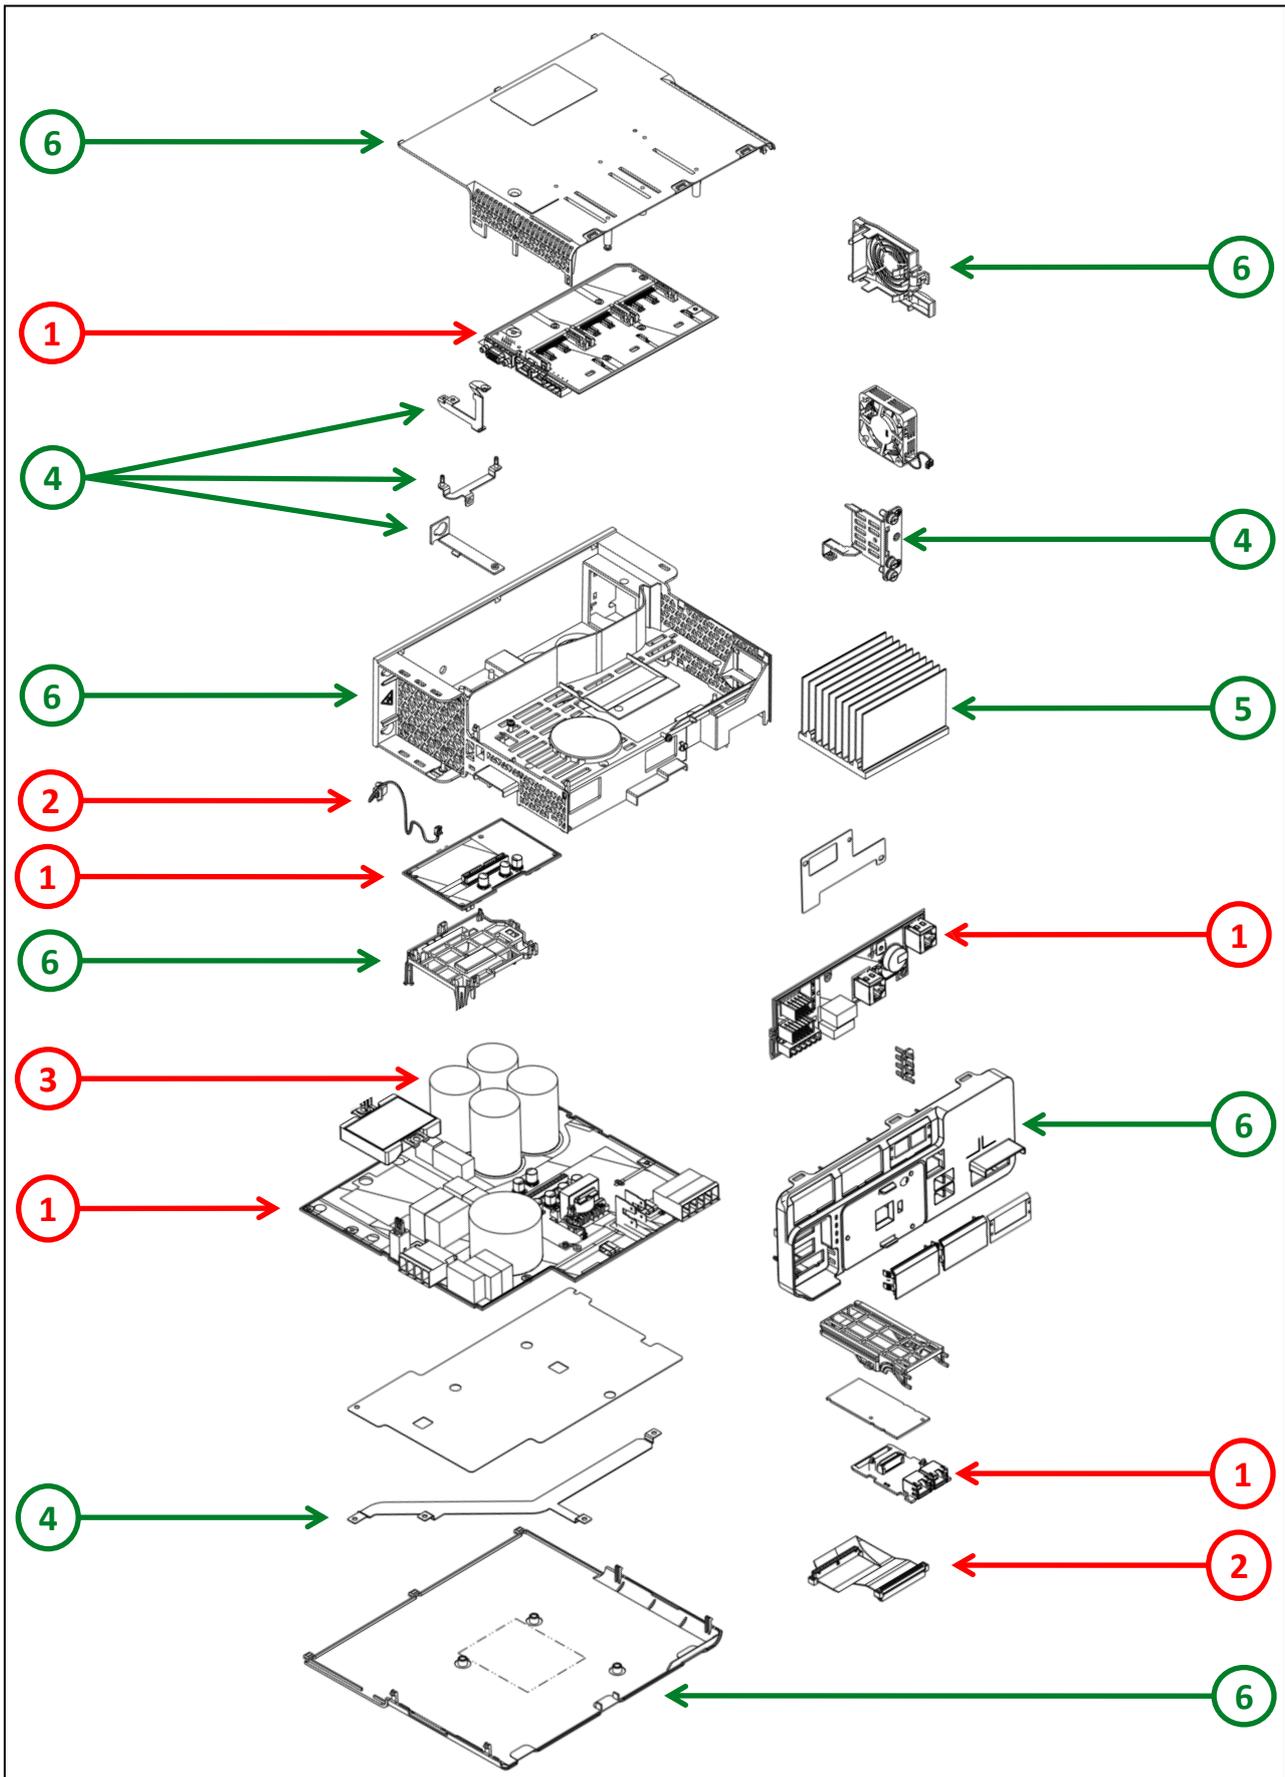

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Power and Communication) > 10cm ²	909	
To be depolluted	2	Cable (high current)	21	
To be depolluted	3	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or	280	
To be dismantled	4	Steel	73	Ground Bar - Ground Plate
To be dismantled	5	Aluminium	295	Heatsink
To be dismantled	6	PC, ABS-PC, PA, PA6, HDPE, SAN with or without additive, PP+EPDM and PP	598	Housing - Support - Cover
Other			124	

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The main function of the Altivar Machine product range is the speed control and variation of a 3-phase synchronous, asynchronous or reluctance electric motor for fluid management and industrial applications.
Product reference	ATV340U40N4E
Total representative product mass	2,3 kg
Representative product dimensions	270mm x 85mm x 232,5mm
Accessories	No accessories needed
Date of information release	10-2024

Additional information

Legal information	The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
In case of special transportation: transportation method	No special transportation
Recyclability potential	47% Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS
 Country Customer Care Center
<http://www.se.com/contact>
 35, rue Joseph Monier
 CS 30323
 F- 92500 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

ENVEOLI2311030_V1

© 2023 - Schneider Electric – All rights reserved

10-2024