


Product End of Life Instructions

ATV630 CAB INT IP00 90KW 400V WO KEYPAD

Altivar Process - 55 to 90KW / 400V





Potential disassembly risks




ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH.

To service, remove all power.
- Wait 15 minutes
- Verify no voltage is present.

**Failure to comply
will result in death
or serious injury**



End of Life Instructions

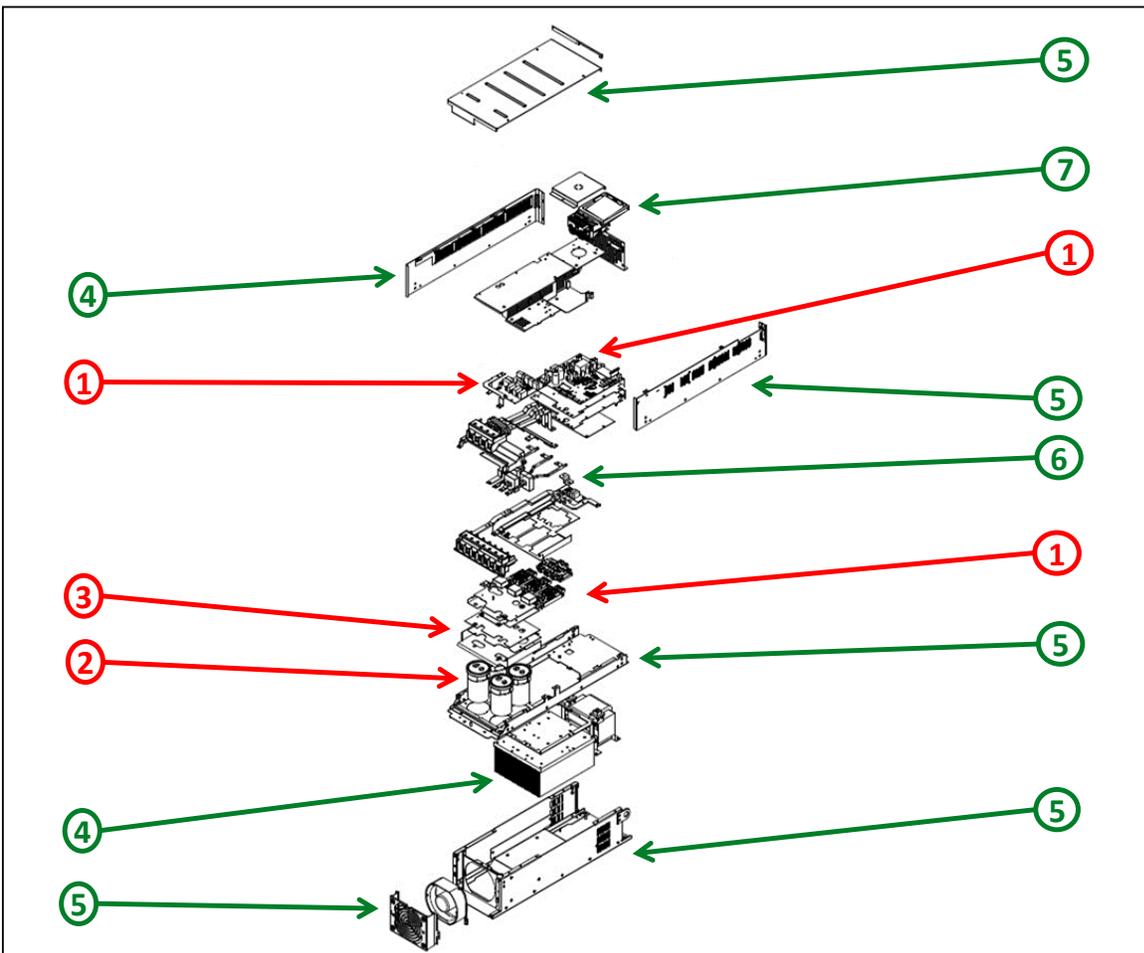

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Power) > 10cm ²	4622	
To be depolluted	1	Electronic Board (Communication) > 10cm ²	178	
To be depolluted	2	Electrolyte capacitors	3200	
To be depolluted	3	Cable	1277	
To be dismantled	4	Aluminium	10797	heatsink, bar
To be dismantled	5	Steel	22285	chassis, houssing, cover, bar
To be dismantled	6	Copper	921	bar
To be dismantled	7	Polymer	317	chassis, houssing
Other			12180	



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The main function of the Altivar Process product range is the speed control and variation of a synchronous, asynchronous or reluctance electric motor for fluid management and industrial applications.
Product reference	ATV630D90N4Z
Total representative product mass	56000 g
Representative product dimensions	748mm x 265mm x 306,9mm
Accessories	No accessories needed.
Date of information release	05/2019



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	No special transportation.	
Recyclability potential	77%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI1812007_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved