


Circularity Profile

TeSys GS 400A 3P



Operations Recommended for the End of Life Treatment


The Circularity profile provides information about preparation for re-use and treatment. It identifies the relevant EEE components and materials as well as their location. Safety instructions for product dismantling and depollution are provided into the User manual or maintenance guide.

The components of the product that optimize the recycling performances are listed, identified and located hereunder.

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse --> Depollution --> Dismantling --> Shredding

End of Life Instructions

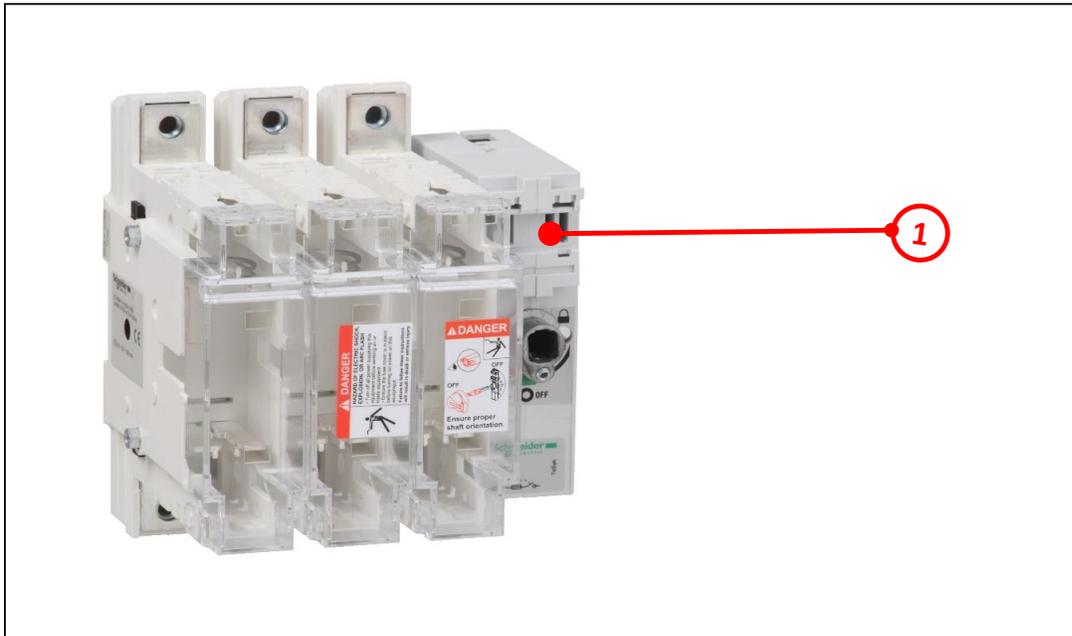

| Recommendation | Number on drawing | Component / Material | Mass (%) | Comment |
|-------------------|-------------------|----------------------|----------|---|
| Potential hazards | 1 | Springs | 1% | Mechanical risk. (Potential security hazard for operators) |



Product description

| | |
|---------------------------------------|---|
| Manufacturer identification | Schneider Electric Industries SAS |
| Brand name | Schneider Electric |
| Product function | TeSys GS is manually operated, modular version multipolar fuse combination switch which can be used with high speed fuses (uR) size 2 rated 400A, in external right side or front operation version. This product can be associated with high breaking capacity fuses and make and break on load and provide safety isolation and protection against overcurrent for any low voltage electrical circuit |
| Product reference | GS2QQ3 |
| Additional similar product references | TeSys GS 3x100 A & TeSys GS 3x250 A |
| Total representative product mass | 4286 g |
| Representative product dimensions | 205mm x 252mm x 149mm |
| Date of information release | 04/2020 |



Additional information

| | | |
|-------------------------|--|---|
| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. | |
| Recyclability potential | 6.3% | Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI2003009_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

04/2020