Product End of Life Instructions

ComPacT NSX Modbus SL Hub





Potential disassembly risks


DANGER

HAZARD OF ELECTRIC SHOCK, **EXPLOSION OR ARC FLASH**

- · Apply appropriate personal protective equipment (PPE) and follow safe electrical work practices. See NFPA 70E, CSA Z462 or local equivalent.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Turn off all power supplying this equipment before working on or inside equipment. Lock the switchgear in the isolated position.
- Always use a properly rated voltage sensing device to confirm power is off.
 Install safety barriers and display a
- danger sign.
- Replace all devices, doors, and covers before turning on power to this equipment.

 Failure to follow these instructions will result in death or serious injury.

End of Life Instructions

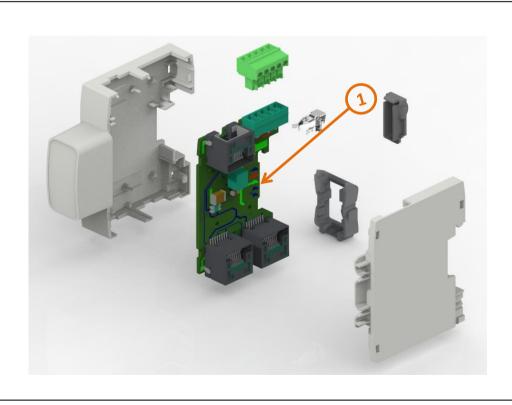

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
Potential hazards	1	Electronic Board (Communication) > 10cm ²	21.575	MODBUS HUB PCBA

Product description

Manufacturer identification	Schneider Electric Industries SAS	
Brand name	Schneider Electric	
Product function	The Modbus Hub is an accessory used to interconnect multiple Modbus devices. It has 3 RJ45 connectors, 1 terminal block connector, and one stacking connector interface. Through all of its connectors, it can carry Modbus and 24V DC supply	
Product reference	LV434224	
Total representative product mass	57.6 g	
Representative product dimensions	72mm X 18mm X 102mm	
Accessories	No	
Date of information release	05-2024	

Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.		
In case of special transportation: transportation method	No		
Recyclability potential	5%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).	

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439

www.se.com

ENVEOLI2405004_V1

Capital social 928 298 512 €

Published by Schneider Electric

© 2023 - Schneider Electric - All rights reserved

05-2024