




Product End of Life Instructions

SpaceLogic KNX Hybrid Switch Actuator REG-K/24X250/10 with manual spacelogic KNX switch actuator

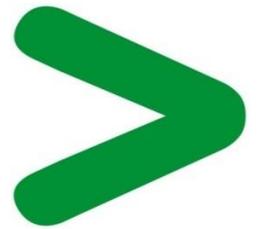

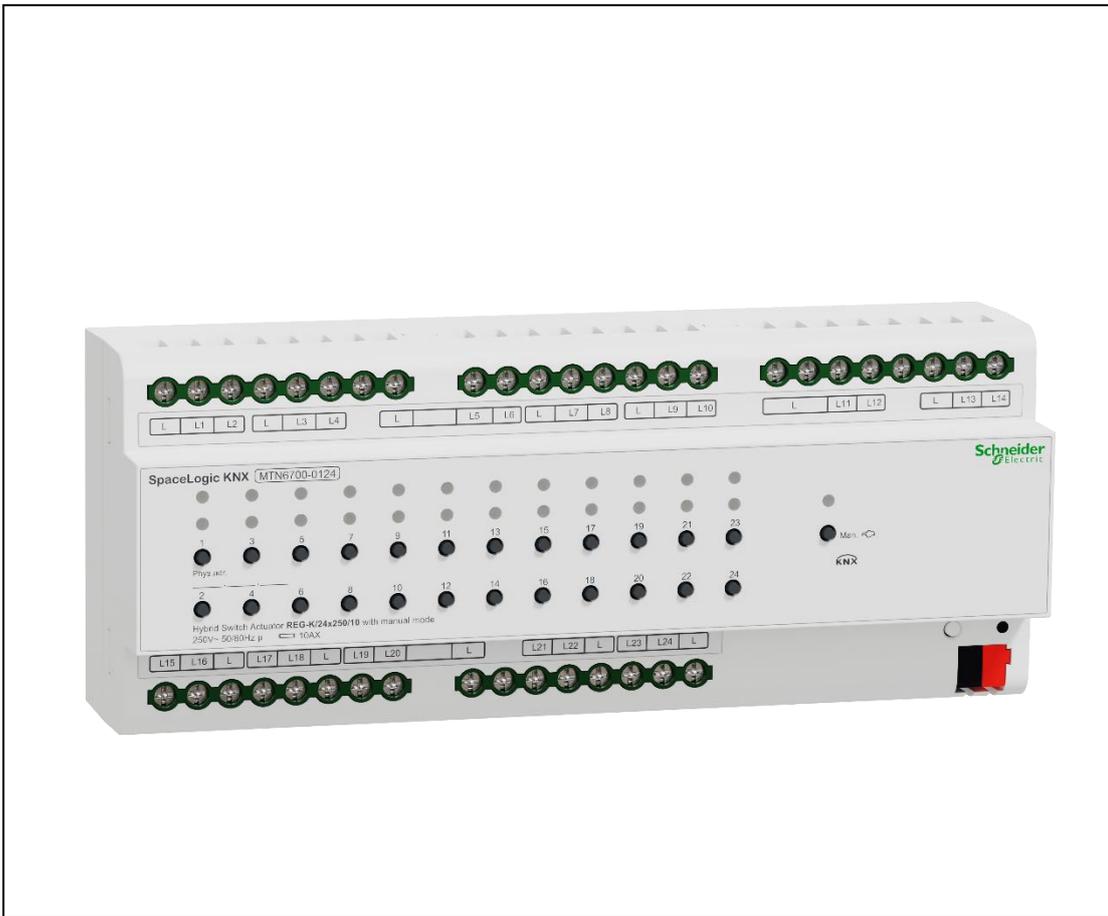

End of Life Instructions

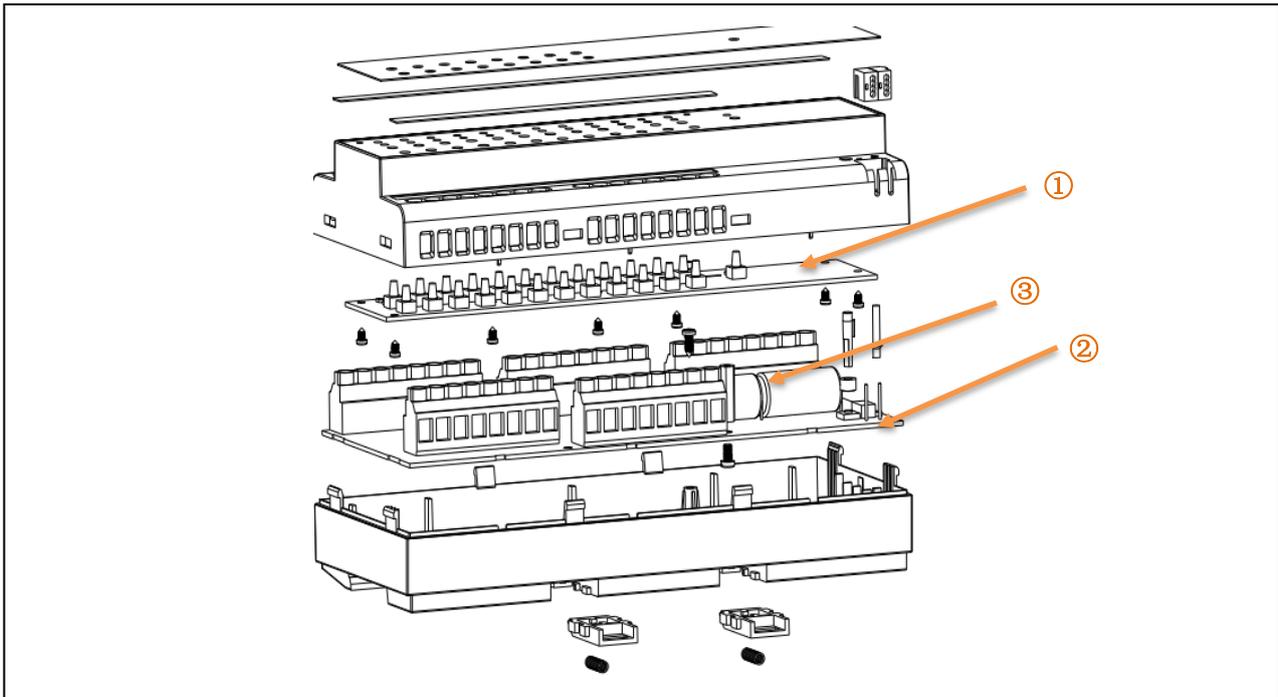

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm ²	499.3	Including all soldering parts
To be depolluted	2	Electronic Board (Communication) > 10cm ²	39.8	Including all soldering parts
To be depolluted	3	Electrolytic Capacitors	19.5	4 x large electrolytic capacitors

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The SpaceLogic Hybrid switch actuator is a multi-output module that integrates a variety of output functions, including switching output, curtain AC output, fan output and valve output. The assignment of the functions to the channels is freely selectable and depends on your requirements. The status of the device, e.g. status of the channels, operating readiness or activated manual operation, is indicated by LEDs.
Product reference	MTN6700-0124
Additional similar product references	MTN6700-0104 MTN6700-0108 MTN6700-0116 MTN6700-0304 MTN6700-0308 MTN6700-0312
Total representative product mass	709.1 g
Representative product dimensions	216 mm x 90 mm x 64 mm
Accessories	No
Date of information release	2023/09/18

Additional information

Legal information	The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.		
In case of special transportation: transportation method	No		
Recyclability potential	<table border="1"> <tr> <td data-bbox="466 488 518 645">2%</td> <td data-bbox="518 488 1543 645">Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).</td> </tr> </table>	2%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
2%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).		

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.se.com/contact>

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

ENVEOLI2309010_V1

© 2023 - Schneider Electric – All rights reserved

2023/09/18