

Circularity Profile

SpaceLogic KNX IP Router






Potential disassembly risks

The Circularity profile provides information about preparation for re-use and treatment. It identifies the relevant EEE components and materials as well as their location. Safety instructions for product dismantling and depollution are provided into the User manual or maintenance guide.



End of Life Instructions

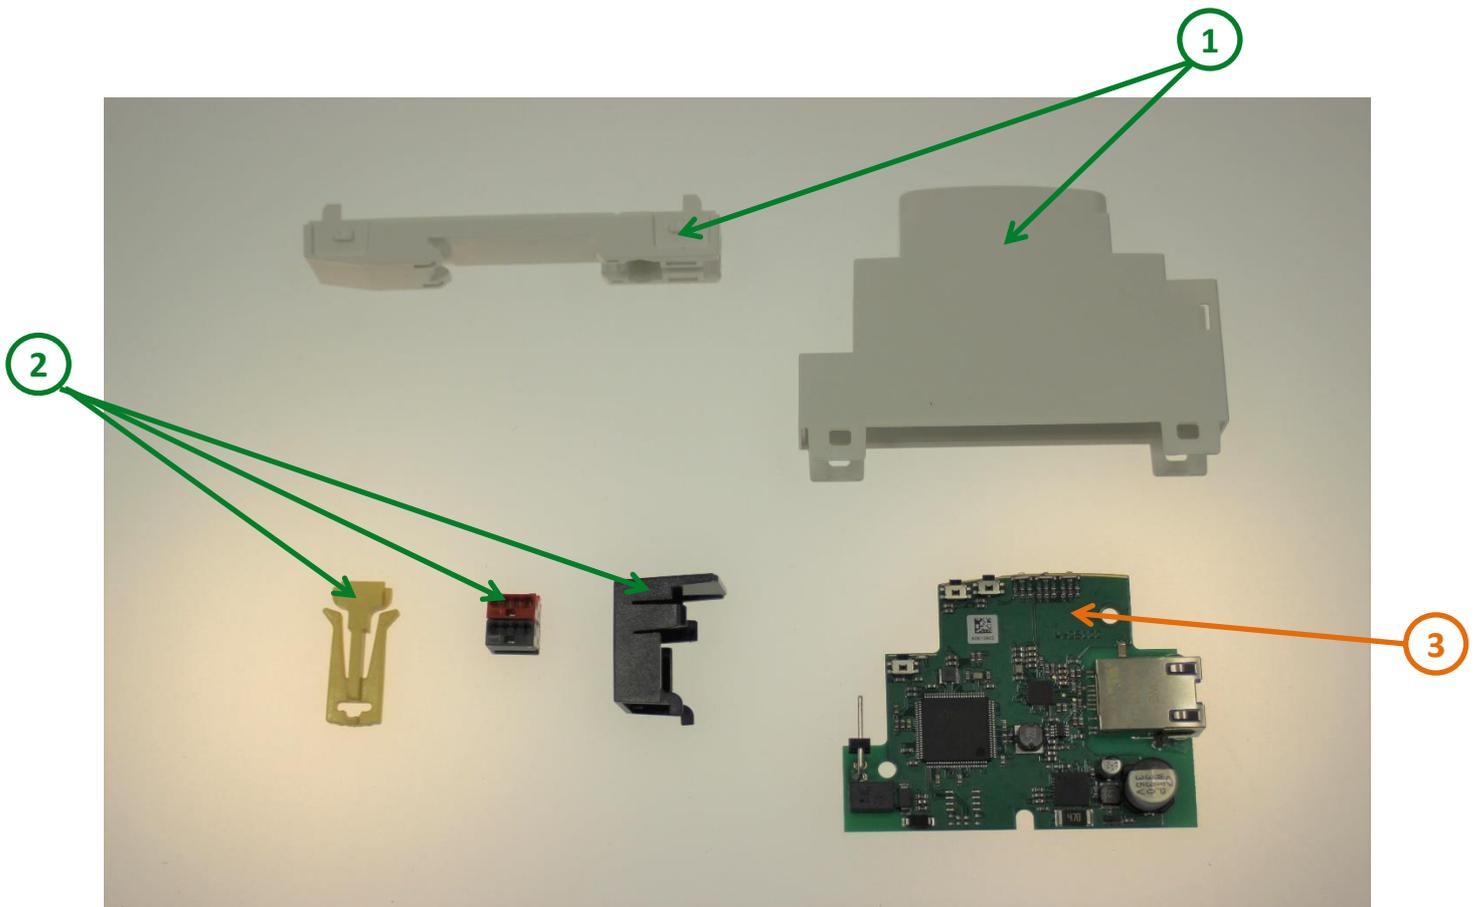

| Recommendation | Number on drawing | Component / Material | Weight (in g) | Comment |
|------------------|-------------------|--|---------------|-----------|
| To be dismantled | 1 | Plastic parts | 23 | |
| Other | 2 | Plastic parts | 4.7 | Shredding |
| To be depolluted | 3 | Electronic Board (Communication) > 10cm ² | 16.3 | |



Product description

| | |
|--|---|
| Manufacturer identification | Schneider Electric Industries SAS |
| Brand name | Schneider Electric |
| Product function | The KNX IP Interface serves as a secure interface between a LAN (IP, Ethernet) and KNX and can be used as a programming interface for the ETS®. As a KNX Secure Interface (tunneling), the device prevents unauthorized access to the system. In addition the KNX IP Router enables the secure forwarding (routing) of telegrams between different lines over a LAN (IP, Ethernet) as a fast backbone. The assumed service life is 10 years. |
| Product reference | MTN6500-0103 |
| Additional similar product references | MTN6500-0103 MTN6502-0105 |
| Total representative product mass | 45 g |
| Representative product dimensions | 100mm x 18mm x 66mm |
| Date of information release | 12/2019 |



Additional information

| | | |
|--------------------------------|--|---|
| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. | |
| Recyclability potential | 54% | Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI1909001_V1-EN

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

12/2019