

Product End of Life Instructions

EXW-SMART HUB




Schneider
 **Electric**



Potential disassembly risks



End of Life Instructions

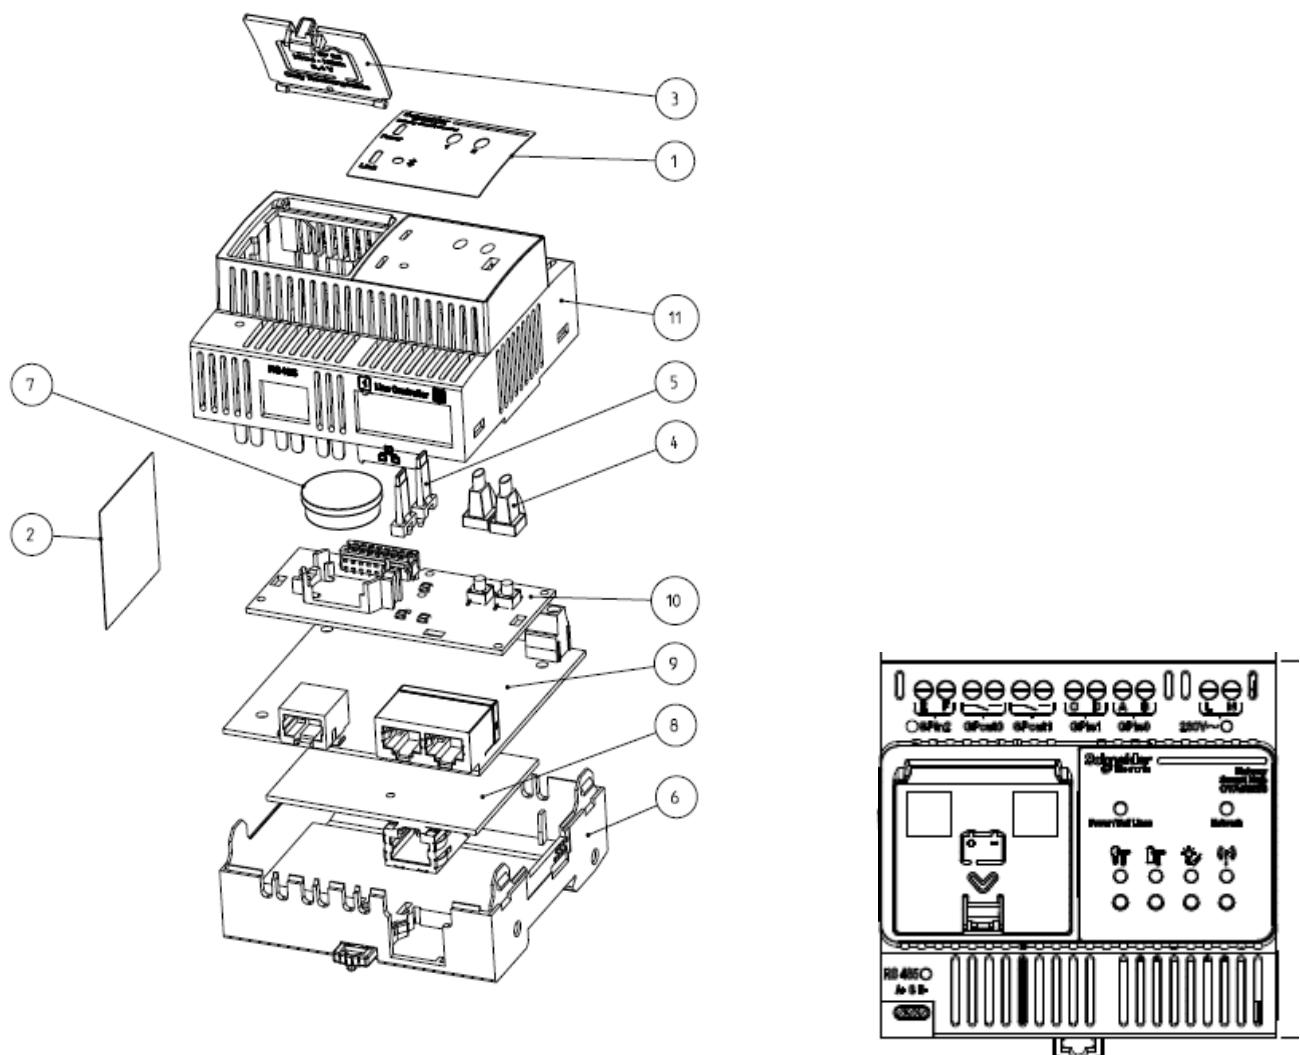

| Recommendation | Number on drawing | Component / Material | Weight (in g) | Comment |
|------------------|-------------------|--|---------------|---------|
| To be dismantled | 1 | PC (Coverage Front) | 5 | |
| To be dismantled | 2 | PC (Coverage Front) | 3 | |
| To be dismantled | 3 | PC (Coverage battery) | 2 | |
| To be depolluted | 4 | PA (Light guidance) | 6 | |
| To be dismantled | 5 | Steel (Screwsx2) | 10 | |
| To be dismantled | 6 | PC (Base Smart HUB) | 36 | |
| To be dismantled | 7 | Battery (BATT/NR LI1CR2477 3V1AH C/IM) | 3 | |
| To be dismantled | 8 | Support for Electronic component (Electronic cart) | 6 | |
| To be dismantled | 9 | Support for Electronic component (Electronic cart) | 11 | |
| To be depolluted | 10 | Electronic component (Electronic cart) | 140 | |
| To be depolluted | 11 | PC (Body) | 45 | |

Product description

| | |
|---------------------------------------|--|
| Manufacturer identification | Schneider Electric Industries SAS |
| Brand name | Schneider Electric |
| Product function | Control unit for Emergency Lighting addressable System compliant to EN 60234 |
| Product reference | OVA53238 |
| Additional similar product references | OVA53238 |
| Total representative product mass | 270 g |
| Representative product dimensions | 90mm x 85mm x 69,5mm |
| Accessories | 0 |
| Date of information release | 01-2025 |

Additional information

| | |
|--|--|
| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. |
| In case of special transportation: transportation method | 0 |
| Recyclability potential | 32% The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability). |

Schneider Electric Industries SAS

Country Customer Care Center

http://www.se.com/contact

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 928 298 512 €

www.se.com

ENVEOLI2412018_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

01-2025