Product End of Life Instructions

Variable speed drive - Altivar Process - 45kW, 380 to 480V - cabinet Integration - IP20

Altivar Process ATV600









Potential disassembly risks

The information provided in this document assumes that the product is completely deenergized and uninstalled (refer to the instructions provided in the appropriate product manuals).


Dismantling/disassembling the product may entail hazards caused by, for example, sharp edges, chemical aggression or ejected parts.


A WARNING


HAZARD DUE TO INSUFFICIENT PROTECTION

- Implement all safety measures required by the applicable regulations and by the processes used to dismantle/disassemble and dispose of the product.
- Use all necessary personal protective equipment such as gloves and goggles.

Failure to follow these instructions can result in death or serious injury.

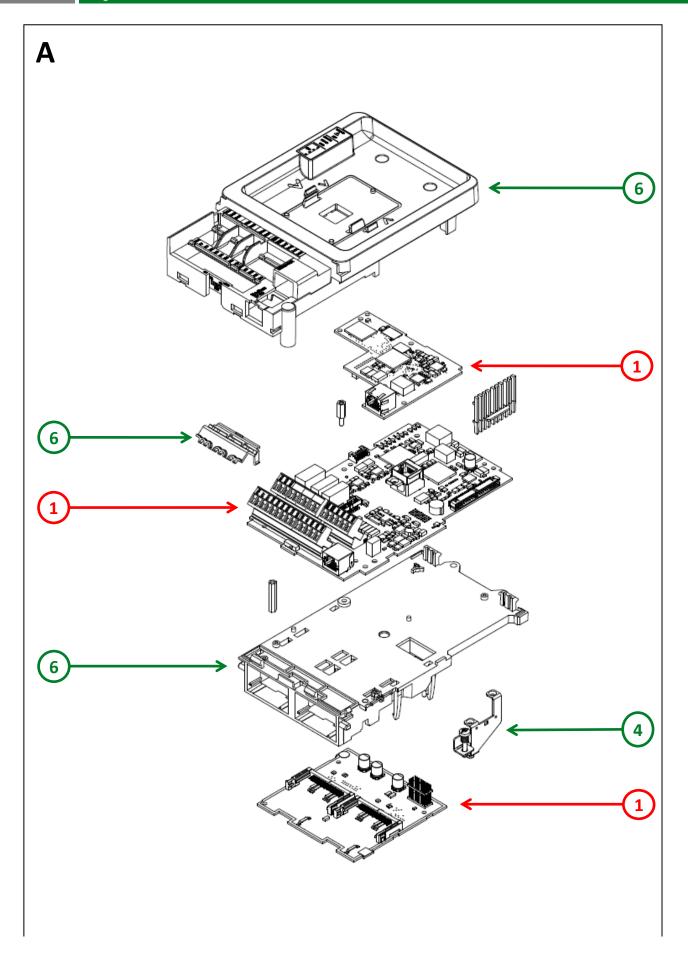

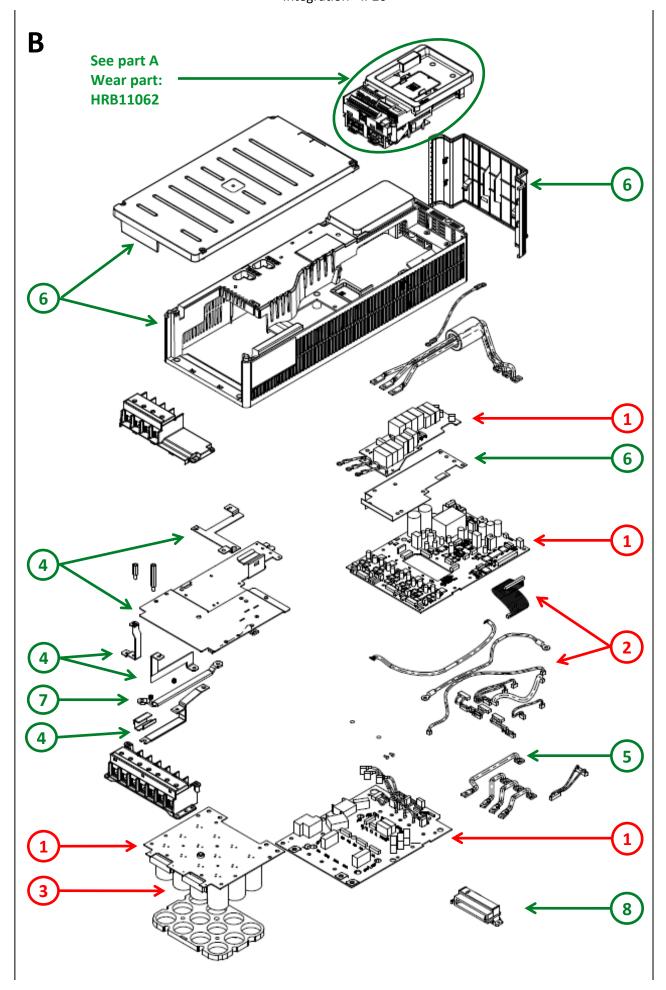

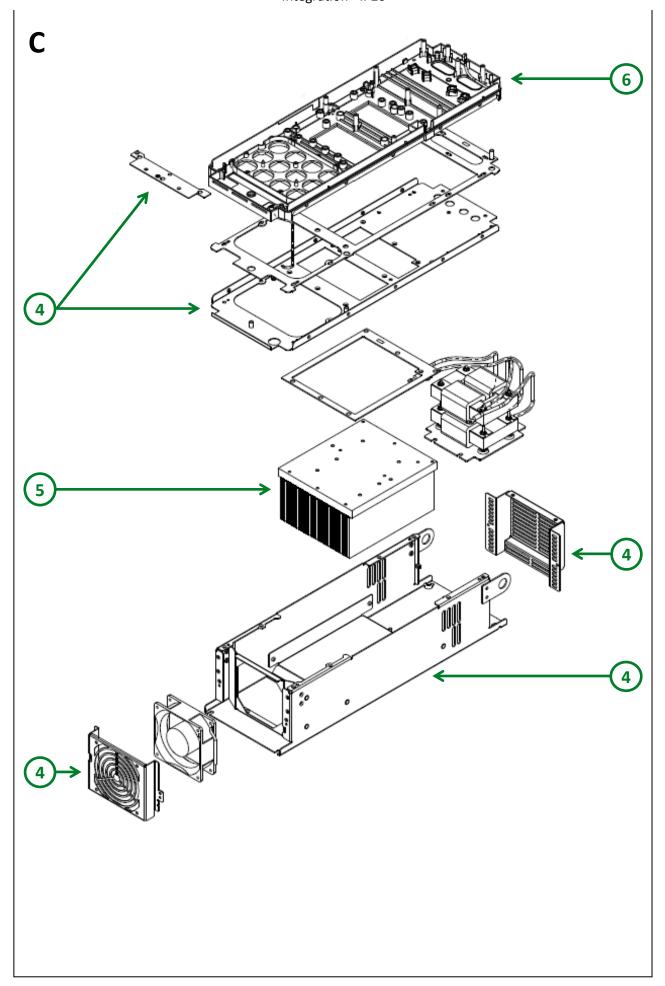

ENVEOLI1812006_V2 - End of Life Instructions - Variable speed drive - Altivar Process - 45kW, 380 to 480V - cabinet Integration - IP20

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Power and Communication) > 10cm ²	2476	
To be depolluted	2	Cable (high current)	450	
To be depolluted	3	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	1050	
To be dismantled	4	Steel	7660	Ground CTRL - Ground Input & Output - Ground Power & Plate - Top Grid - Supports - Lifting Hole - Plate - Lower Housing - Ground Bar
To be dismantled	5	Aluminium	5420	Heatsink- Links
To be dismantled	6	PC, ABS-PC, PA, PA6, HDPE, SAN with or without additive, PP+EPDM and PP	2158	Chassis -Control Chassis - Control Housing - Upper Housing - Cover - Insulation Sheet
To be dismantled	7	Copper	219	Links
To be dismantled	8	Ferrite	260	Toroide
Other			6807	

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The main function of the Altivar Process product range is the speed control and variation of a synchronous, asynchronous or reluctance electric motor for fluid management and industrial applications.
Product reference	ATV630D45N4Z
Total representative product mass	26,5 kg
Representative product dimensions	597mm x 210mm x 262mm
Accessories	No accessories needed
Date of information release	07-2025

Additional information

Legal information	The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.		
In case of special transportation: transportation method	No special tranportation		
Recyclability potential	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).		

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €
www.se.com
ENVEOLI1812006_V2

Published by Schneider Electric © 2023 - Schneider Electric – All rights reserved