


Product End of Life Instructions

Pro-face GP6000

GP6000, 22W Full HD, PCAP, DC

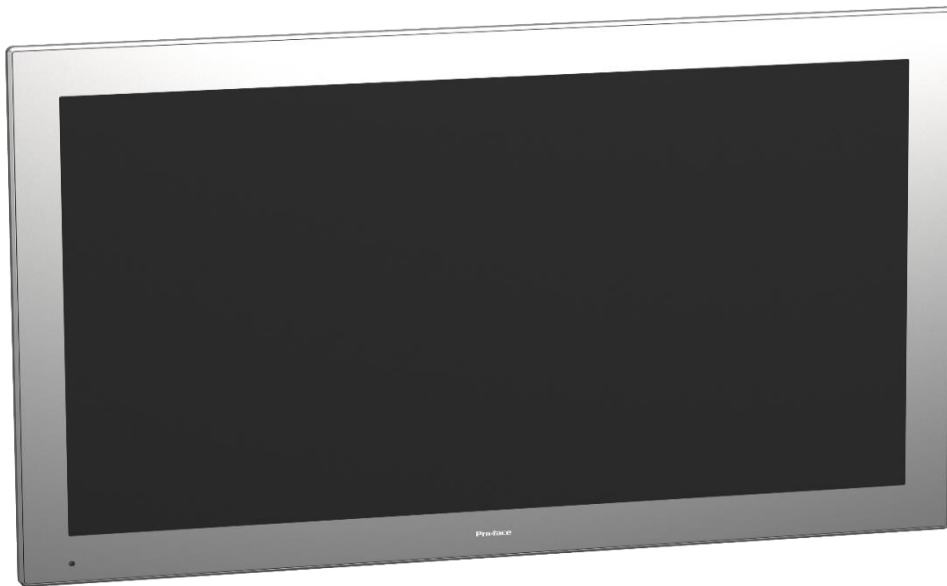

Pro-face
by Schneider Electric



Potential disassembly risks

The Circularity profile provides information about preparation for re-use and treatment. It identifies the relevant EEE components and materials as well as their location. Safety instructions for product dismantling and depollution are provided into the User manual or maintenance guide

⚠ WARNING


HAZARD OF ARC FLASH OR FIRE

- Disconnect battery terminals before disassembly
- Avoid any electrical connection between the terminals

Failure to follow these instructions can result in death or serious injury.



End of Life Instructions

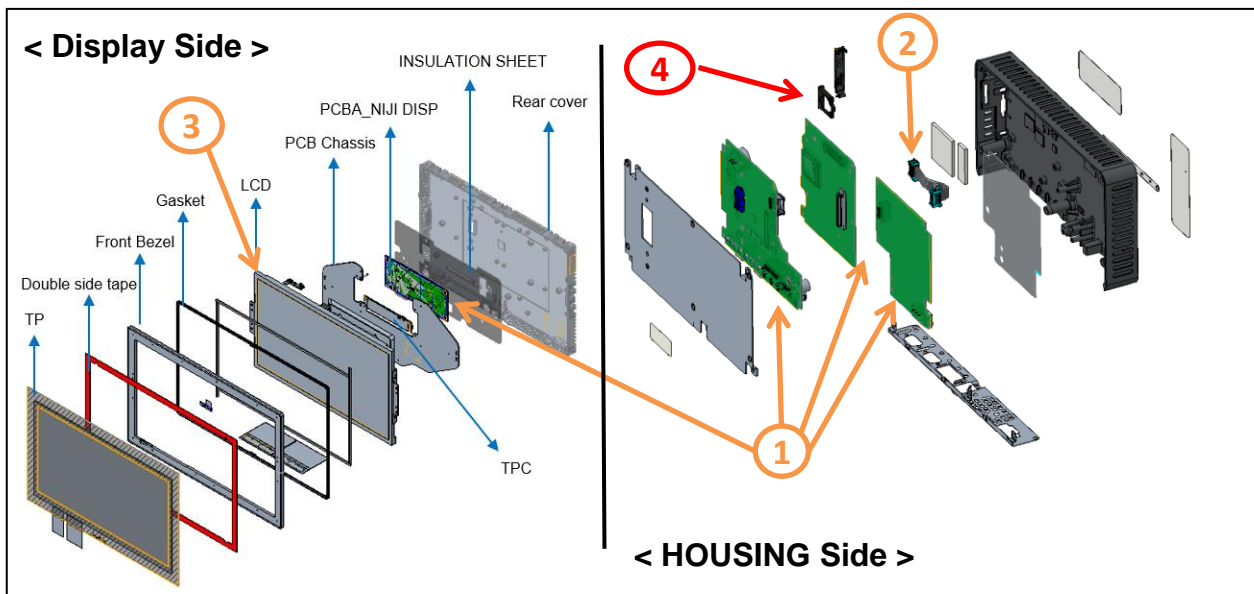

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm ²	271	PCBA
To be depolluted	2	Cable (low current)	17.5	
To be depolluted	3	LCD (surface > 100cm ²) and all those back-lighted with gas discharge lamps	1850	LCD Screen
Potential hazards	4	Battery	2.5	
Other			5359	



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Pro-face by Schneider Electric
Product function	PFXGP6940WCDI is 22W touch panel display, Full HD, PCAP, Modular, 2COM, 2ETH, USB, 12-24VDC, I/F expandable.
Product reference	PFXGP6940WCDI
Additional similar product references	PFXGP6940WCDI PFXGP6540WCDI PFXGP6640WCDI PFXGP6740WCDI PFXGP6840WCDI PFXGP6540TMDI PFXGP6640TMDI PFXGP6740TMDI PFXGP6540WCAI PFXGP6640WCAI PFXGP6740WCAI PFXGP6840WCAI PFXGP6940WCAI PFXGP6540TMAI PFXGP6640TMAI PFXGP6740TMAI
Total representative product mass	7.5 Kg
Representative product dimensions	532.6mm x 330.6mm x 66mm
Accessories	No
Date of information release	05-2025



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	53% The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com
ENVEOLI2410029_V1

Published by Schneider Electric
©2025 - Schneider Electric – All rights reserved

05-2025