


SICOMtape 11W/m 940 Ultraslim – 5mm



Code 5601194020

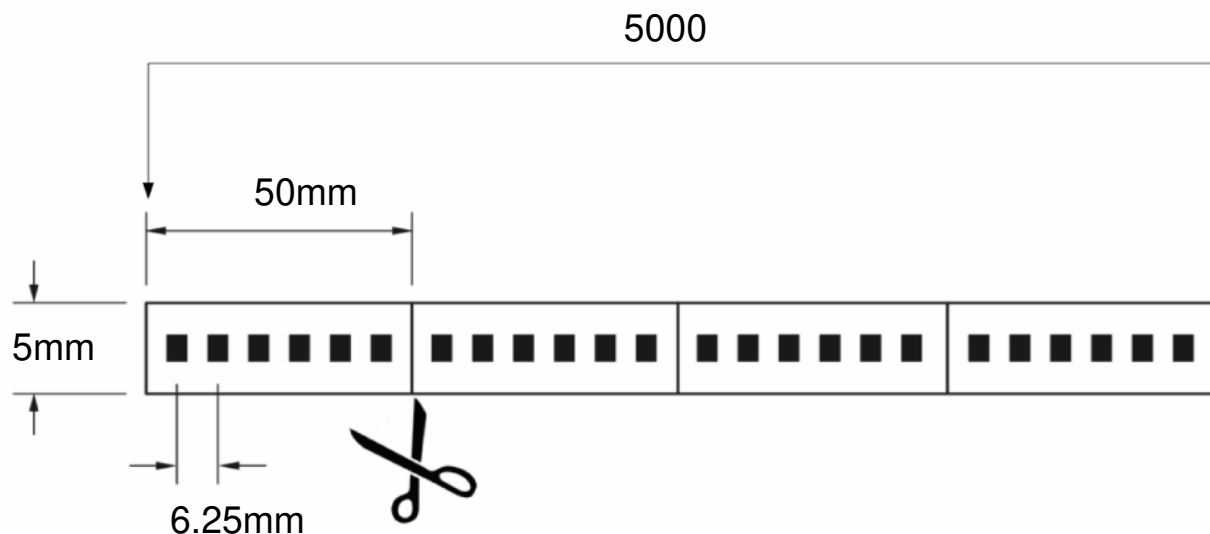

Lamp Voltage



Luminous flux



Max.module lenght





CRI



Degree of protection

DESCRIZIONE

SICOMtape 11W/m 940 24V ultraslim - 5 m has a 2835 CHIPLED.
It is IP20 protection.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 11W/m 940 Ultraslim – 5mm



Code 5601194020

MECHANICAL DATA	
Width (mm)	5
Height (mm)	2
Lenght (mm)	5000
Degree of protection (IP)	IP20
Lenght of particular segments (mm)	50
ELECTRICAL DATA	
Efficiency (lm/W)	104
Lamp power per meter (W)	11
Lamp voltage (V)	24
LIGHT TECHNICAL DATA	
Luminous flux (lm/m)	1150
Beam angle (°)	120
Mac Adam	3
CRI (Ra)	>90
Colour temperature (K)	4000
EEC	EF
Number Led/M	160
CONNECTION	
Max wiring lenght (m)	5 meters (supply from start-end or in the middle of the module)
Max, module lenght (mm)	5000
TEMPERATURE DATA	
Lifetime (h)	60000
Ambient temperature (°C)	-20...+35



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019
sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 11W/m 940 Ultraslim – 5mm



Code 5601194020

SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information, please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019
sicom@sicom-pd.it - www.sicom-pd.it