


SIRIOtape 20W/m TW 2500-6000K superbright

560209TW20



Lamp Voltage

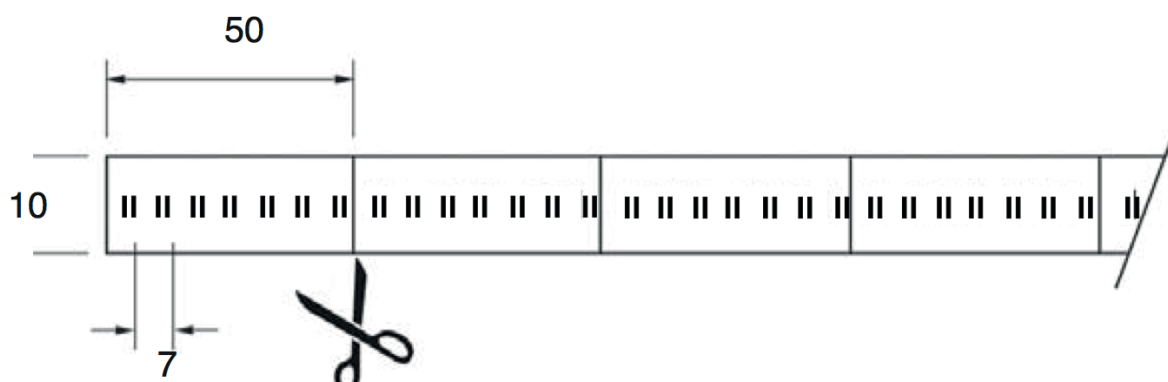

Luminous flux



Max.module lenght



CRI





Degree of protection

DESCRIZIONE

SIRIOtape 20W/m TW 2500-6000K 24V superbright, LED 2110.

IP20 protection.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

SIRIOtape 20W/m TW 2500-6000K superbright

560209TW20



MECHANICAL DATA

Width (mm)	10
Height (mm)	1,5
Lenght (mm)	5000
Degree of protection (IP)	IP20
Lenght of particular segments (mm)	

ELECTRICAL DATA

Efficiency (lm/W)	89
Lamp power per meter (W)	20
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	1790
Beam angle (°)	120
Led	2110
CRI (Ra)	>90
Colour temperature (K)	Tunable White(TW) 2500-6000K
EEC	A+
Number Led/M	240

CONNECTION

Connection number	1 (supply from ends or in the middle every 5 meter)
Max, module lenght (mm)	5 .000

TEMPERATURE DATA

Lifetime (h)	36000
Ambient temperature (°C)	-20...+35



SIRIOtape 20W/m TW 2500-6000K superbright

560209TW20



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it