


SICOMtape 11W/m IP20 superbright XL

5605779XL

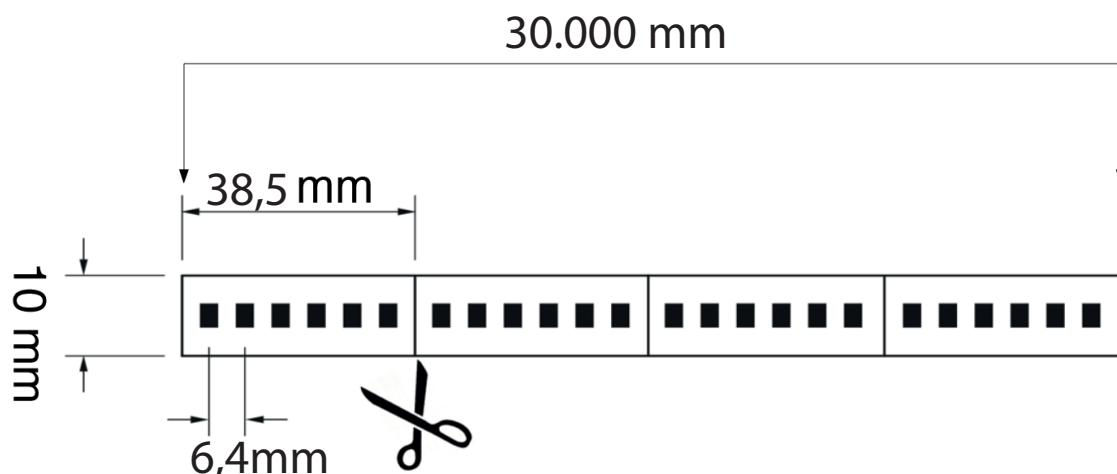

24
V

Lamp Voltage

1370
lm/m

Luminous flux

30
m

Max.module lenght

>85
CRI

CRI

IP
20

Degree of protection

DESCRIZIONE

SIRIOtape 11W/m 24V 860 superbright XL, LED 2835.

IP20 protection.



> 85
CRI

IP
20



RoHS



* on request.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 11W/m IP20 superbright XL

5605779XL



MECHANICAL DATA

Width (mm)	10
Height (mm)	2
Lenght (mm)	30.000
Degree of protection (IP)	IP20
Lenght of particular segments (mm)	38,5

ELECTRICAL DATA

Efficiency (lm/W)	124
Lamp power per meter (W)	11
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	1370
Beam angle (°)	120
Binning tolerance	-
CRI (Ra)	> 85
Colour temperature (K)	6000K
EEC	A
Number Led/M	156

CONNECTION

Connection number	supply every 5 meter
Max, module lenght (mm)	5000

TEMPERATURE DATA

Lifetime (h)	45000
Ambient temperature (°C)	-20...+35



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 11W/m IP20 superbright XL

5605779XL



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it