


SICOMtape 23W/m RGBW (4000K)

5605967



Lamp Voltage

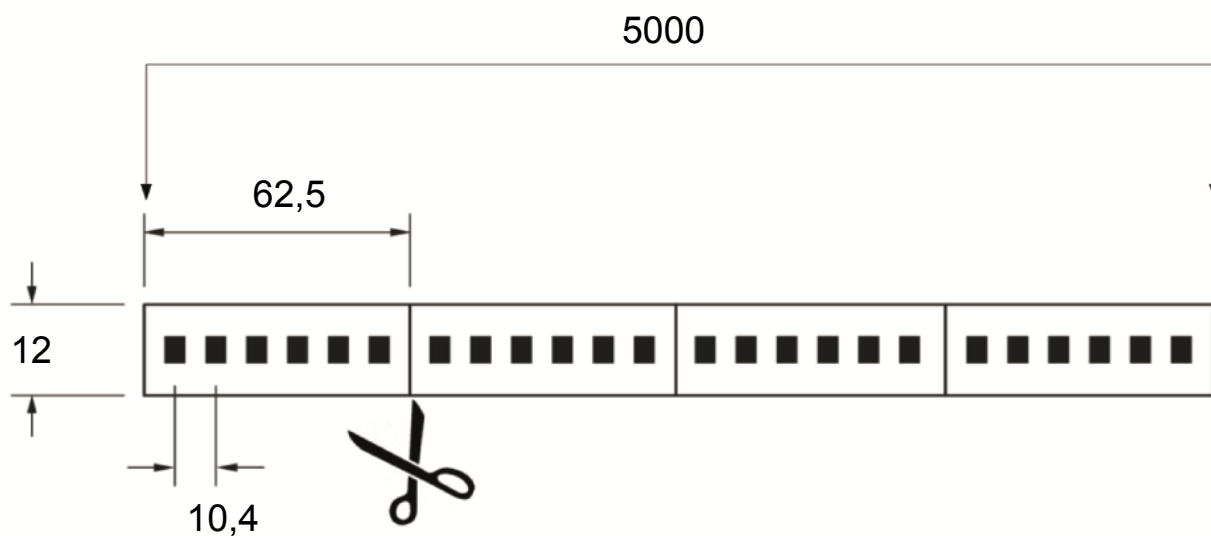

Luminous flux



Max.module lenght






CRI



Degree of protection

DESCRIZIONE

SIRIOtape 23W/m RGBW RGBW (4000K)



on request



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019
sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 23W/m RGBW (4000K)

5605967



MECHANICAL DATA

Width (mm)	12
Height (mm)	1,5
Lenght (mm)	5000
Degree of protection (IP)	IP20
Lenght of particular segments (mm)	62,5

ELECTRICAL DATA

Efficiency (lm/W)	52
Lamp power per meter (W)	23
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	1210
Beam angle (°)	120
CRI (Ra)	>90
Colour temperature (K)	RGBW (4000K)
Number Led/M	120

CONNECTION

Max wiring lenght (m)	5 meters (supply from start-end or in the middle of the module)
Max, module lenght (mm)	5000

TEMPERATURE DATA

Lifetime (h)	60000
Ambient temperature (°C)	-20...+40



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 23W/m RGBW(4000K)

5605967



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information, please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019
sicom@sicom-pd.it - www.sicom-pd.it