


SICOMtape 23W/m IP20 superbright

5612393020

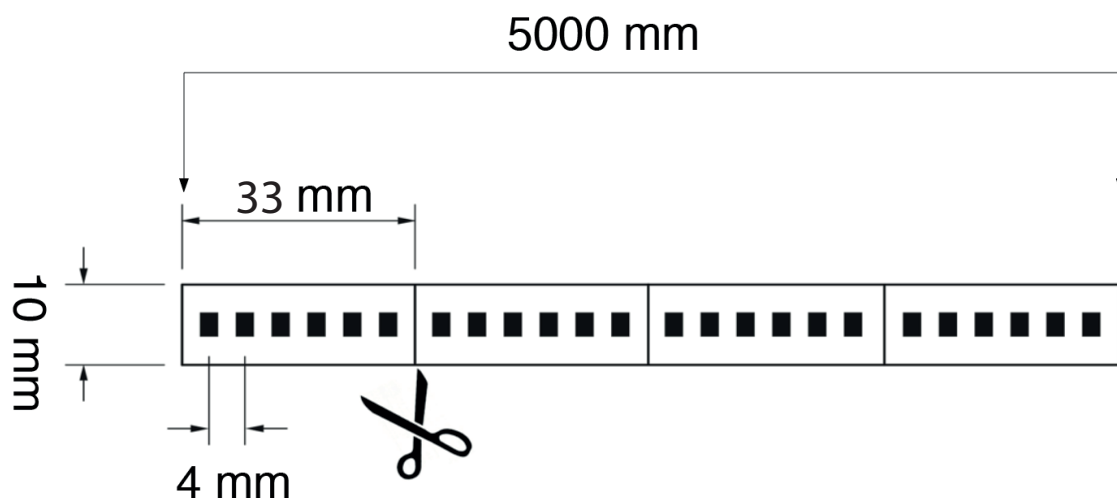

24
V

Lamp Voltage

2645
lm/m

Luminous flux

5.00
m

Max.module lenght

>95
CRI

CRI

IP
20

Degree of protection

DESCRIZIONE

SIRIOtape 23W/m 24V **930** superbright, LED
2835. IP20 protection.



> 95
CRI

IP
20



RoHS



* on request.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 23W/m IP20 superbright

5612393020



MECHANICAL DATA

Width (mm)	10
Height (mm)	2
Lenght (mm)	5000
Degree of protection (IP)	IP20
Lenght of particular segments (mm)	33

ELECTRICAL DATA

Efficiency (lm/W)	120
Lamp power per meter (W)	23
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	2645
Beam angle (°)	120
Binning tolerance	-
CRI (Ra)	> 95
Colour temperature (K)	3000K
EEC	A
Number Led/M	240

CONNECTION

Connection number	1 (supply from ends or in the middle every 5 meter)
Max, module lenght (mm)	5000

TEMPERATURE DATA

Lifetime (h)	45000
Ambient temperature (°C)	-20...+35



SICOMtape 23W/m IP20 superbright

5612393020



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it