


SIRIOtape 9,6W/m 930 24V superbright IP65



561993065

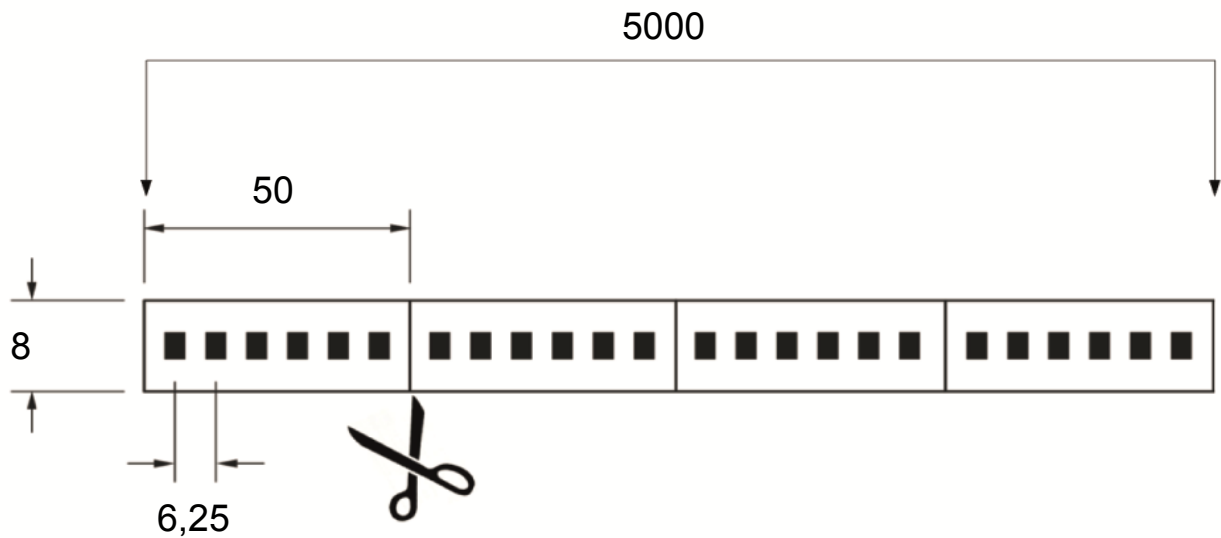

Lamp Voltage



Luminous flux



Max.module lenght





CRI



Degree of protection

DESCRIZIONE

SICOMtape 9,6W/m 930 24V superbright IP65
Led 2835



on request



SICOMtape 9,6W/m 930 superbright IP65

561993065



MECHANICAL DATA

Width (mm)	8
Height (mm)	3
Lenght (mm)	5000
Degree of protection (IP)	IP65
Lenght of particular segments (mm)	50

ELECTRICAL DATA

Efficiency (lm/W)	106
Lamp power per meter (W)	9,6
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	1021
Beam angle (°)	120
Mac Adam	3
CRI (Ra)	>90
Colour temperature (K)	3000
EEC	F
Number Led/M	160

CONNECTION

Max wiring lenght (m)	5 meters (supply from one side in the middle or from start to end)
Max, module lenght (mm)	5000

TEMPERATURE DATA

Lifetime (h)	60000
Ambient temperature (°C)	-20...+40



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 9,6W/m 930 superbright IP65

561993065



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information, please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019
sicom@sicom-pd.it - www.sicom-pd.it