


SIRIOtape 9,6W/m 940 24V superbright IP65 XL-20m


561994065XL



Lamp Voltage

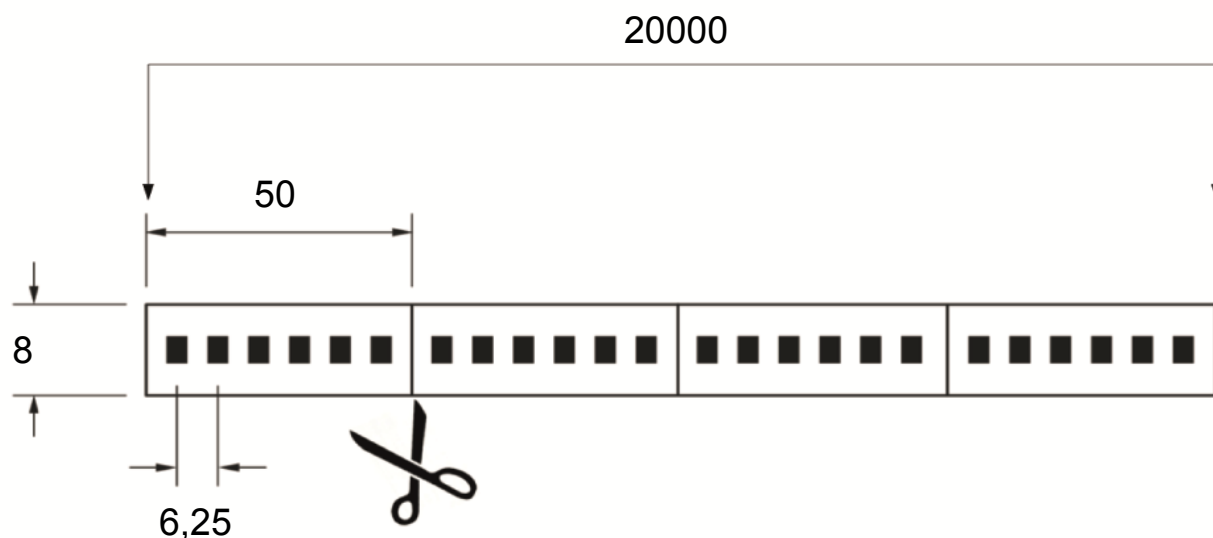

Luminous flux



Max.module lenght






CRI



Degree of protection

DESCRIZIONE

SIRIOtape 9,6W/m 940 24V superbright IP65 XL-20m
Led 2835



on request



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

SIRIOtape 9,6W/m 940 24V superbright IP65 XL-20m

561994065XL



MECHANICAL DATA

Width (mm)	8
Height (mm)	3
Lenght (mm)	20000
Degree of protection (IP)	IP20
Lenght of particular segments (mm)	50

ELECTRICAL DATA

Efficiency (lm/W)	117
Lamp power per meter (W)	9,6
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	1125
Beam angle (°)	120
Mac Adam	3
CRI (Ra)	>90
Colour temperature (K)	4000
EEC	F
Number Led/M	160

CONNECTION

Max wiring lenght (m)	5 meters (supply from one side in the middle or from start to end)
Max, module lenght (mm)	20000

TEMPERATURE DATA

Lifetime (h)	60000
Ambient temperature (°C)	-20...+40



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

SIRIOtape 9,6W/m 940 24V superbright IP65 XL-20m **SICOM**

561994065XL

SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information, please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019
sicom@sicom-pd.it - www.sicom-pd.it