


SICOMtape HE 15W/m 940 24V

561HE1594020

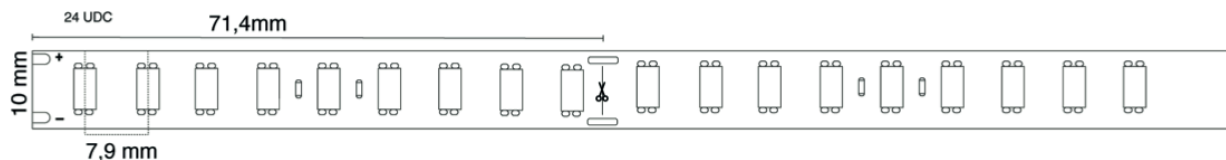

24
V

Lamp Voltage

2655
lm/m

Luminous flux

5.00
m

Max.module lenght

>90
CRI

CRI

IP
20

Degree of protection

DESCRIZIONE

SICOMTape HE 15W/m 940 24V

IP20 protection.

>90
CRI

IP
20



RoHS



on request-



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

SICOMTape HE 15W/m 940 24V

561HE1594020



MECHANICAL DATA

Width (mm)	10
Lenght (mm)	5000
Degree of protection (IP)	IP20
Lenght of particular segments (mm)	71,4

ELECTRICAL DATA

Efficiency (lm/W)	184
Lamp power per meter (W)	14,4
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	2655
Beam angle (°)	120
CRI (Ra)	>90
Colour temperature (K)	4000
EEC	A

CONNECTION

Connection number	5 meter (supply from start-end or in the middle of the module)
Max. module lenght (mm)	5000

TEMPERATURE DATA

Lifetime (h)	45000
Ambient temperature (°C)	-25...+45



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it

SICOMTape HE 15W/m 940 24V

561HE1594020



NOT INCLUDED ACCESORIES

561HE10120 SICOMtape HE connettore strip-strip

561HE10212 SICOMtape HE connettore tappo con cavo

SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it