


# SICOMtape WallW 45° 19W 3000K IP67-5m

562WL451993067



Lamp Voltage

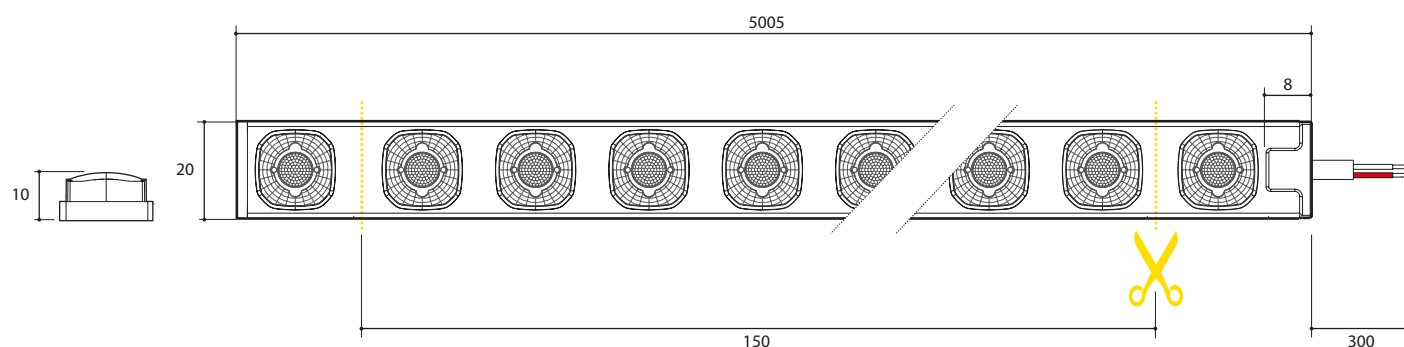

Luminous flux



Max.module lenght






CRI



Degree of protection

## DESCRIZIONE

SICOMtape WallW 45° asimmetrica 19W 3000K IP67-5m  
IP67 protection.



**RoHS**

\*on request



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

# SICOMtape WallW 45° 19W 3000K IP67-5m

562WL451993067



## MECHANICAL DATA

|                                    |      |
|------------------------------------|------|
| Width (mm)                         | 20   |
| Height (mm)                        | 10   |
| Lenght (mm)                        | 5005 |
| Degree of protection (IP)          | IP67 |
| Lenght of particular segments (mm) | 150  |

## ELECTRICAL DATA

|                          |     |
|--------------------------|-----|
| Efficiency (lm/W)        | 107 |
| Lamp power per meter (W) | 19  |
| Lamp voltage (V)         | 24  |

## LIGHT TECHNICAL DATA

|                        |      |
|------------------------|------|
| Luminous flux (lm/m)   | 2030 |
| Beam angle (°)         | 45   |
| CRI (Ra)               | 90   |
| Colour temperature (K) | 3000 |
| EEC                    | F    |
| Number Led/M           | 46   |

## CONNECTION

|                         |                                 |
|-------------------------|---------------------------------|
| Max wiring lenght (m)   | 10 meter (supply from one side) |
| Max, module lenght (mm) | 10000                           |

## TEMPERATURE DATA

|                          |           |
|--------------------------|-----------|
| Lifetime (h)             | 60.000    |
| Ambient temperature (°C) | -20...+45 |



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it


# SICOMtape WallW 45° 19W 3000K IP67-5m

562WL451993067




## ACCESSORIES INCLUDED

Mounting bracket




## ACCESSORIES NOT INCLUDED


|           |                                      |   |
|-----------|--------------------------------------|---|
| 562WL1015 | SICOMtape WallW tappo per strip      | 1 |
| 562WL1017 | SICOMtape WallW connettore con cavo  | 4 |
| 562WL1019 | SICOMtape WallW connettore tra strip | 2 |
| 562WL1021 | SICOMtape WallW connettore ponte     | 3 |

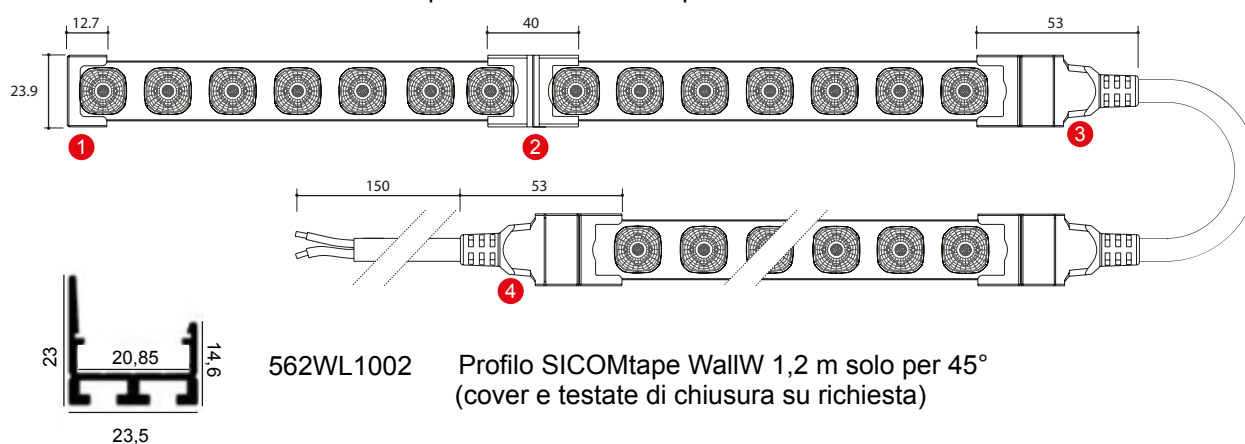

562WL1002 Profilo SICOMtape WallW 1,2 m solo per 45°  
(cover e testate di chiusura su richiesta)



562WL1014 \* SICOMtape WallW staffa fiss. per profilo 45° esterna



562WL1011 SICOMtape WallW staf

\* le staffe si fissano a pressione

### SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.  
For more information please contact [sicom@sicom-pd.it](mailto:sicom@sicom-pd.it).

### DISCLAIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019  
[sicom@sicom-pd.it](mailto:sicom@sicom-pd.it) - [www.sicom-pd.it](http://www.sicom-pd.it)