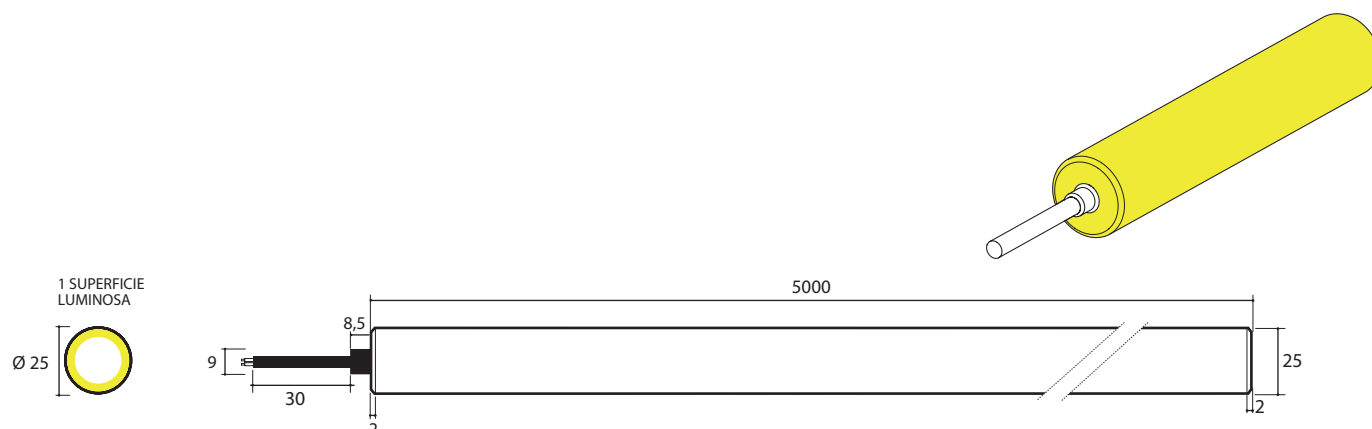


SICOMTape Neon tubONE 10W 2700K IP65



563TUB102765



Lamp Voltage



Luminous flux



Max.module lenght



CRI





Bending diameter

DESCRIZIONE

SICOMTape Neon tubONE 10W 2700 IP65

Good flexibility, it is 360° luminous uniformity without any shadow. Minimum bending diameter >200mm. IP65 protection, resistant to chemical.



*on request.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it

SICOMTape Neon tubONE 10W 2700K IP65



563TUB102765

MECHANICAL DATA

Lenght (mm)	5000	
Ø (mm)	25	
Degree of protection (IP)	IP65	
Lenght of particular segments (mm)	-	

ELECTRICAL DATA

Efficiency (lm/W)	52	
Lamp power per meter (W)	10	
Lamp voltage (V)	24	
Voltage range	23,5 - 24,5 Vdc	

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	520	
Beam angle (°)	125	
Binning tolerance	3 SDCM	
CRI (Ra)	>85	
Colour temperature (K)	2700	
EEC	A+	

CONNECTION

Connection number	2	
Cable cross-section (mm²)	0,5	
Max, module lenght (mm)	5000	

TEMPERATURE DATA

Lifetime (h)	45000	
Ambient temperature (°C)	-25...+45	
Storage temperature (°C)	-25...+60	
Operating temperature (°C)	-25...+65	



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it








SICOMTape Neon tubONE 10W 2700K IP65



563TUB102765

Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25°C ambient temperature and a light colour of 4.000 K (or RGB). These values can have a tolerance value of $\pm 10\%$ (or $\pm 15\%$ at ECO/TWO/RGB/AIR).
Module lenght at 24V input voltage at the module and luminous flux drop 10% over the specified lenght.

NOT INCLUDED ACCESSORIES

SICOMtubONE Installation Method	L x B x H (mm)
	563TUB1001 SICOMtape tubONE IP65 KIT SUPERFICIE Staffa 20 x 30 x 27,4
	563TUB1000 SICOM tubONE IP65 KIT SUPERFICIE c/PROFILO Staffa 100 x 30 x 27,4
	563TUB1002 SICOMtape tubONE IP65 KIT SOSPENSIONE Staffa Cavo Regolabile 1500 mm 20 x 30 x 27,4
	563TUB1003 SICOMtape tubONE IP65 KIT SOSP. c/PROFILO Cavo Regolabile 1500 mm 100 x 30 x 27,4
	563TUB1004 SICOMtape tubONE IP65 KIT Verticale corto Staffa 41,63h
	563TUB1006 SICOMtape tubONE IP65 KIT CURVA Staffe 41,63h
	563TUB1005 SICOMtape tubONE IP65 KIT Verticale lungo Staffa Cavo Regolabile 1500 mm 70h

SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.

