


# SICOMTape Neon TWIST 10W 2700K IP67 - 5m

563TWI102767



Lamp Voltage

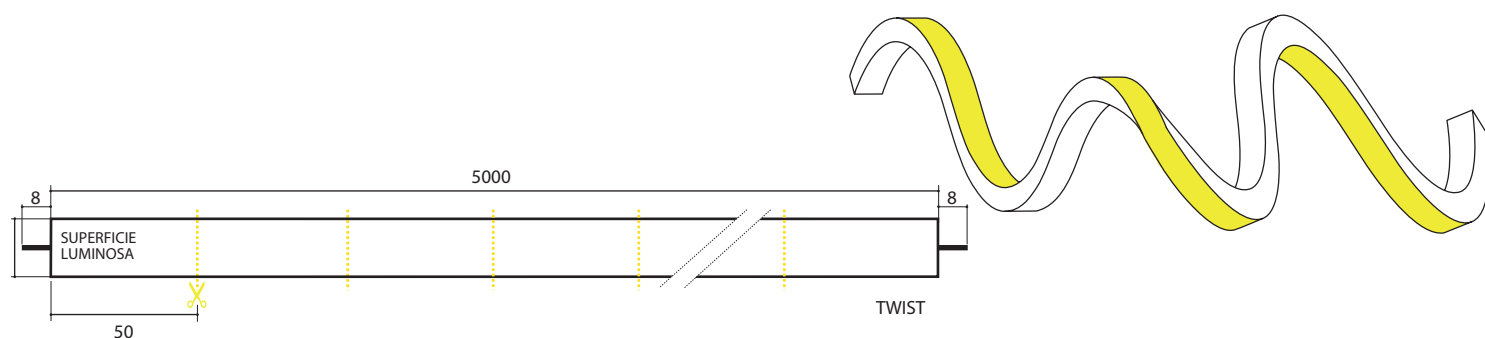

Luminous flux



Max.module lenght



CRI



Bending diameter



## DESCRIZIONE

SICOMTape Neon TWIST 10W 2700K IP67 - 5m.

Vertical and horizontal bending. Bending radius is 100mm. 1-Side emitting.

IP67 protection, resistant to chemical.

30cm connector from Both Ends.



\*on request.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

# SICOMTape Neon TWIST 10W 2700K IP67 - 5m

563TWI102767

|                                    |                 |  |
|------------------------------------|-----------------|--|
| MECHANICAL DATA                    |                 |  |
| Width (mm)                         | 16              |  |
| Height (mm)                        | 15              |  |
| Lenght (mm)                        | 5000            |  |
| Degree of protection (IP)          | IP67            |  |
| Lenght of particular segments (mm) | 50              |  |
| ELECTRICAL DATA                    |                 |  |
| Efficiency (lm/W)                  | 68              |  |
| Lamp power per meter (W)           | 10              |  |
| Lamp voltage (V)                   | 24              |  |
| Voltage range                      | 23,5 - 24,5 Vdc |  |
| LIGHT TECHNICAL DATA               |                 |  |
| Luminous flux (lm/m)               | 692             |  |
| Beam angle (°)                     | 125             |  |
| Binning tolerance                  | 3 SDCM          |  |
| CRI (Ra)                           | 90              |  |
| Colour temperature (K)             | 2700            |  |
| EEC                                | A+              |  |
| CONNECTION                         |                 |  |
| Connection number                  | 2               |  |
| Cable cross-section (mm²)          | 0,5             |  |
| Max, module lenght (mm)            | 5000            |  |
| TEMPERATURE DATA                   |                 |  |
| Lifetime (h)                       | 45000           |  |
| Ambient temperature ( °C)          | -25...+45       |  |
| Storage temperature ( °C)          | -25...+60       |  |
| Operating temperature ( °C)        | -25...+65       |  |



# SICOMTape Neon TWIST 10W 2700K IP67 - 5m

563TWI102767

Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25°C ambient temperature and a light colour of 4.000 K (or RGB). These values can have a tolerance value of  $\pm 10\%$  (or  $\pm 15\%$  at ECO/TWO/RGB/AIR).  
Module length at 24V input voltage at the module and luminous flux drop 10% over the specified length.

## INCLUDED ACCESSORIES


SICOMtape Neon TWIST

End caps - Fixing screw - Mounting brackets




## NOT INCLUDED ACCESSORIES

SICOMtape Neon TWIST Profili



563TWI1005 SICOMtape Neon TWIST IP67 profilo 1000 x 20,5 x 17,6



563TWI1006 SICOMtape Neon TWIST IP67 prof.pieghevole 500 x 17,5 x 16,6

### SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.

For more information please contact [sicom@sicom-pd.it](mailto:sicom@sicom-pd.it).

### DISCLAIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

[sicom@sicom-pd.it](mailto:sicom@sicom-pd.it) - [www.sicom-pd.it](http://www.sicom-pd.it)