


SICOMTape Neon TWIST 10W 4000K IP67 - 5m

563TWI104067



Lamp Voltage

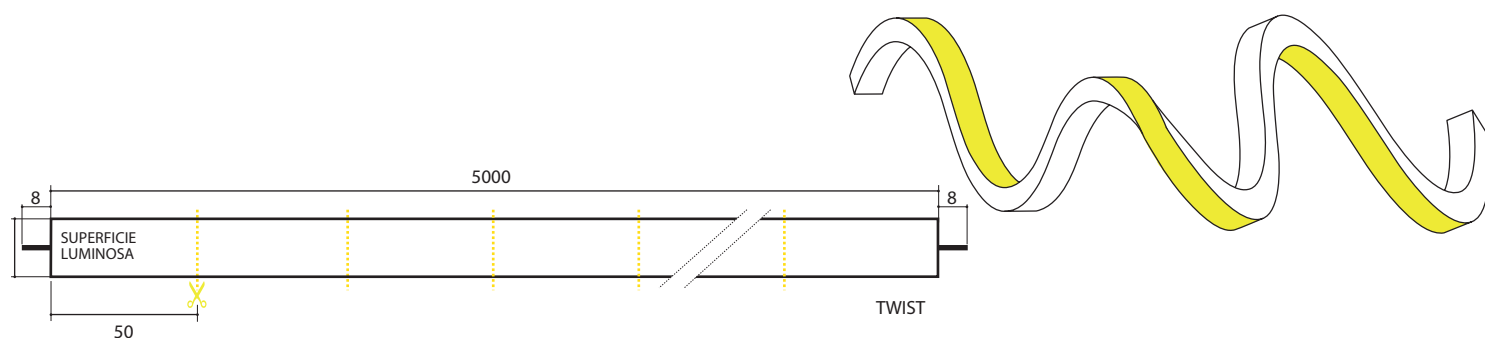

Luminous flux



Max.module lenght



CRI



Bending diameter



DESCRIZIONE

SICOMTape Neon TWIST 10W 4000K IP67 - 5m.

Vertical and horizontal bending. Bending radius is 100mm. 1-Side emitting.

IP67 protection, resistant to chemical.

30cm connector from Both Ends.



*on request.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

SICOMTape Neon TWIST 10W 4000K IP67 - 5m

563TWI104067

MECHANICAL DATA		
Width (mm)	16	
Height (mm)	15	
Lenght (mm)	5000	
Degree of protection (IP)	IP67	
Lenght of particular segments (mm)	50	

ELECTRICAL DATA		
Efficiency (lm/W)	72	
Lamp power per meter (W)	10	
Lamp voltage (V)	24	
Voltage range	23,5 - 24,5 Vdc	

LIGHT TECHNICAL DATA		
Luminous flux (lm/m)	720	
Beam angle (°)	125	
Binning tolerance	3 SDCM	
CRI (Ra)	90	
Colour temperature (K)	4000	
EEC	A+	

CONNECTION		
Connection number	2	
Cable cross-section (mm²)	0,5	
Max, module lenght (mm)	5000	

TEMPERATURE DATA		
Lifetime (h)	45000	
Ambient temperature (°C)	-25...+45	
Storage temperature (°C)	-25...+60	
Operating temperature (°C)	-25...+65	



SICOMTape Neon TWIST 10W 4000K IP67 - 5m

563TWI104067

Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25°C ambient temperature and a light colour of 4.000 K (or RGB). These values can have a tolerance value of $\pm 10\%$ (or $\pm 15\%$ at ECO/TWO/RGB/AIR).
Module lenght at 24V input voltage at the module and luminous flux drop 10% over the specified lenght.

INCLUDED ACCESSORIES


SICOMtape Neon TWIST

End caps - Fixing screw - Mounting brackets




NOT INCLUDED ACCESSORIES

SICOMtape Neon TWIST Profili



563TWI1005 SICOMtape Neon TWIST IP67 profilo 1000 x 20,5 x 17,6



563TWI1006 SICOMtape Neon TWIST IP67 prof.pieghevole 500 x 17,5 x 16,6

SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.

For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it