


# SICOMtape 19W/m 827XL superbright



Code 5601982765XL

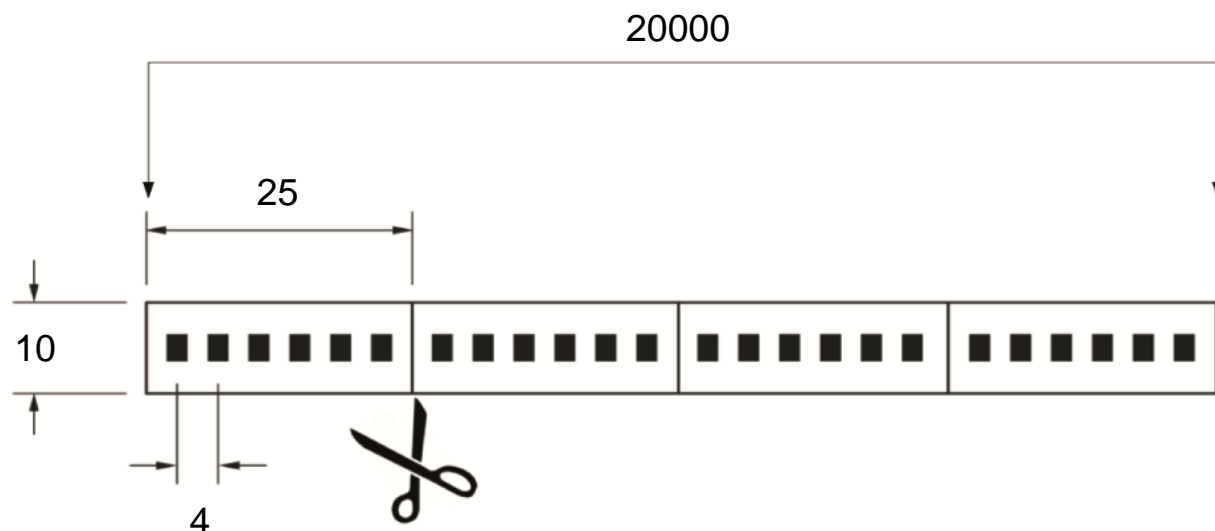

Lamp Voltage




Luminous flux



Max.module lenght






CRI



Degree of protection

## DESCRIZIONE

SICOMtape 19W/m 827XL 24V superbright - 20 m has a 2835 CHIPLED.  
It is IP65 protection.



on request



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

# SICOMtape 19W/m 827XL superbright



Code 5601982765XL

MECHANICAL DATA	
Width (mm)	10
Height (mm)	3
Lenght (mm)	20000
Degree of protection (IP)	IP65
Lenght of particular segments (mm)	25

ELECTRICAL DATA	
Efficiency (lm/W)	63
Lamp power per meter (W)	19
Lamp voltage (V)	24

LIGHT TECHNICAL DATA	
Luminous flux (lm/m)	1190
Beam angle (°)	120
Mac Adam	3
CRI (Ra)	>85
Colour temperature (K)	2700
EEC	A
Number Led/M	240

CONNECTION	
Max wiring lenght (m)	20 meters (supply from start-end or in the middle of the module)
Max, module lenght (mm)	5000

TEMPERATURE DATA	
Lifetime (h)	36000
Ambient temperature (°C)	-20...+35



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

# SICOMtape 19W/m 827XL superbright



Code 5601982765XL

#### SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.  
For more information, please contact [sicom@sicom-pd.it](mailto:sicom@sicom-pd.it).

#### DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019  
[sicom@sicom-pd.it](mailto:sicom@sicom-pd.it) - [www.sicom-pd.it](http://www.sicom-pd.it)