


SIRIOtape 19W/m SUPERBRIGHT IP20 XL

5601983020XL



Lamp Voltage

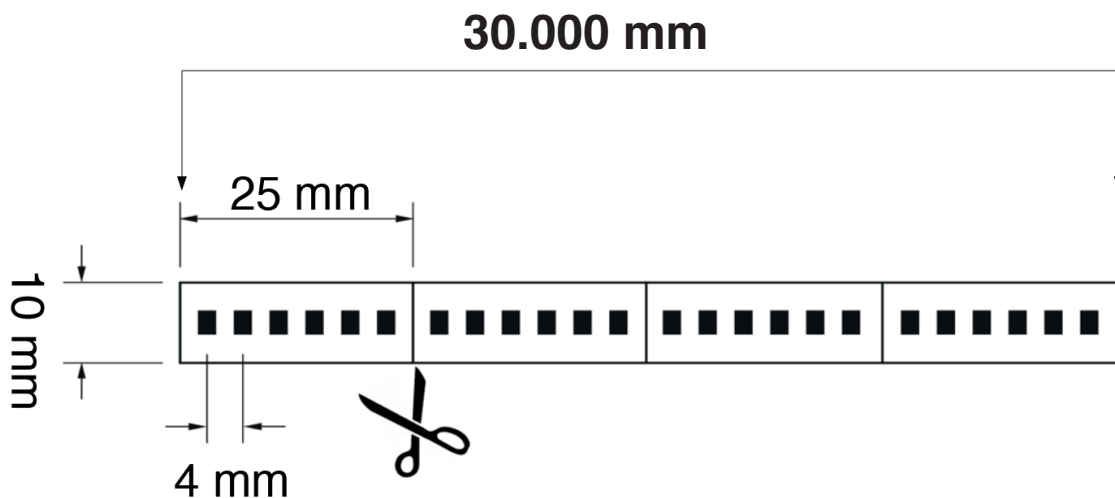

Luminous flux



Max.module lenght



CRI





Degree of protection

DESCRIZIONE

SIRIOtape 19W/m 24V 830 superbright XL, LED 2835.

IP20 protection.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it

SIRIOtape 19W/m SUPERBRIGHT IP20 XL

5601983020XL



MECHANICAL DATA	
Width (mm)	10
Height (mm)	2
Lenght (mm)	30.000
Degree of protection (IP)	IP20
Lenght of particular segments (mm)	25

ELECTRICAL DATA	
Efficiency (lm/W)	79
Lamp power per meter (W)	19
Lamp voltage (V)	24

LIGHT TECHNICAL DATA	
Luminous flux (lm/m)	1500
Beam angle (°)	120
Binning tolerance	-
CRI (Ra)	>85
Colour temperature (K)	3000K
EEC	A
Number Led/M	240

CONNECTION	
Connection number	1 (supply from ends or in the middle every 5 meter)
Max, module lenght (mm)	5 .000

TEMPERATURE DATA	
Lifetime (h)	45000
Ambient temperature (°C)	-20...+35



SIRIOtape 19W/m SUPERBRIGHT IP20 XL

5601983020XL



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it