


SICOMtape Neon Side TW 2700-6500K IP68 - 5m

563SIDE15TW68




Lamp Voltage

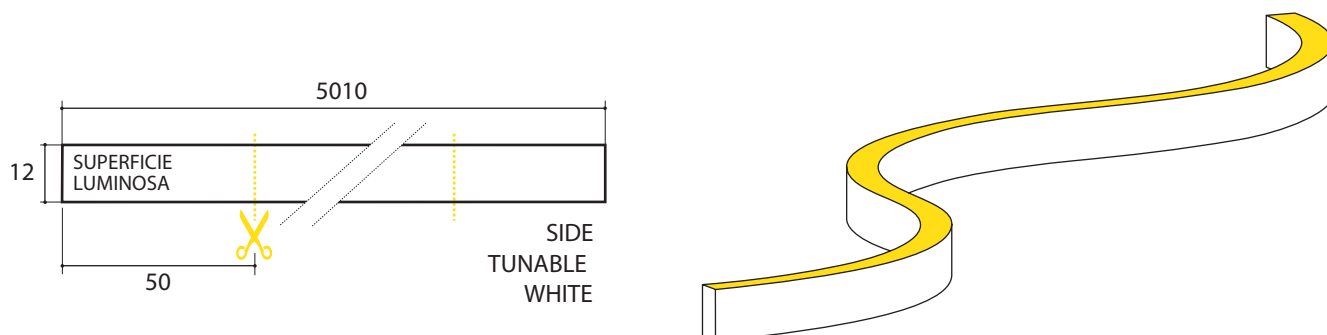

Luminous flux



Max.module lenght



CRI



Bending radius

DESCRIZIONE

SICOMtape Neon Side TW 2700-6500K IP68 - 5m

Horizontal bending direction only. Bending radius is 150mm. 1-Side emitting.



IP68 protection, UV resistant and saltwater resistant via opal polyurethane coating.

30cm connector from Both Ends.



ONE BIN ONLY

Color consistency
Today and tomorrow



*on request.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape Neon Side TW 2700-6500K IP68 - 5m

563SIDE15TW68

MECHANICAL DATA		
Width (mm)	12	
Height (mm)	20	
Lenght (mm)	5010	
Degree of protection (IP)	IP68	
Lenght of particular segments (mm)	50	

ELECTRICAL DATA		
Efficiency (lm/W)	45	
Lamp power per meter (W)	15	
Lamp voltage (V)	24	
Voltage range	23,5 - 24,5 Vdc	

LIGHT TECHNICAL DATA		
Luminous flux (lm/m)	600-700	
Beam angle (°)	125	
Binning tolerance	3 SDCM	
CRI (Ra)	90	
Colour temperature (K)	2700-6500K	
EEC	A+	

CONNECTION		
Connection number	2	
Cable cross-section (mm²)	0,5	
Max, module lenght (mm)	5010	

TEMPERATURE DATA		
Lifetime (h)	45000	
Ambient temperature (°C)	-25...+45	
Storage temperature (°C)	-25...+60	
Operating temperature (°C)	-25...+65	



SICOMtape Neon Side TW 2700-6500K IP68 - 5m

563SIDE15TW68

Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25°C ambient temperature and a light colour of 4.000 K (or RGB). These values can have a tolerance value of $\pm 10\%$ (or $\pm 15\%$ at ECO/TWO/RGB/AIR).
Module length at 24V input voltage at the module and luminous flux drop 10% over the specified length.

INCLUDED ACCESSORIES

SICOMtape Neon SIDE


2 End caps - 15 Fixing screw - 15 Mounting brackets - 1 Silicone tube



NOT INCLUDED ACCESSORIES

SICOMtape Neon SIDE Profile

Code 5609101- Length 1000 (mm) 14,4 x 21,4(mm)



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738

sicom@sicom-pd.it - www.sicom-pd.it