


SICOMtape 23W/m RGBW (4000K) IP65

5605963



Lamp Voltage

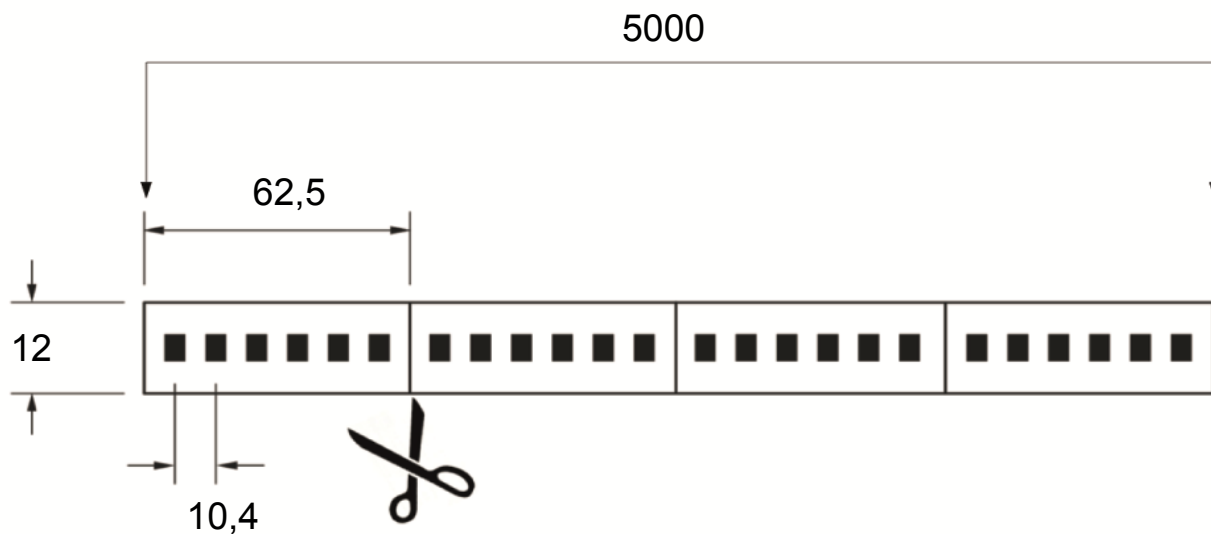


Luminous flux



Max.module lenght





CRI



Degree of protection

DESCRIZIONE

SIRIOtape 23W/m RGBW RGBW (4000K) IP65



on request



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019
sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 23W/m RGBW (4000K) IP65

5605963



MECHANICAL DATA	
Width (mm)	12
Height (mm)	2
Lenght (mm)	5000
Degree of protection (IP)	IP65
Lenght of particular segments (mm)	62,5

ELECTRICAL DATA	
Efficiency (lm/W)	46
Lamp power per meter (W)	23
Lamp voltage (V)	24

LIGHT TECHNICAL DATA	
Luminous flux (lm/m)	1050
Beam angle (°)	120
CRI (Ra)	>90
Colour temperature (K)	RGBW (4000K)
Number Led/M	120

CONNECTION	
Max wiring lenght (m)	5 meters (supply from start-end or in the middle of the module)
Max, module lenght (mm)	5000

TEMPERATURE DATA	
Lifetime (h)	60000
Ambient temperature (°C)	-20...+40



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 23W/m RGBW(4000K) IP65

5605963



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information, please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019
sicom@sicom-pd.it - www.sicom-pd.it