


SICOMtape 14W/m RGB 24V Digital-WS2818B IP67

560DIGRGB1467




Lamp Voltage

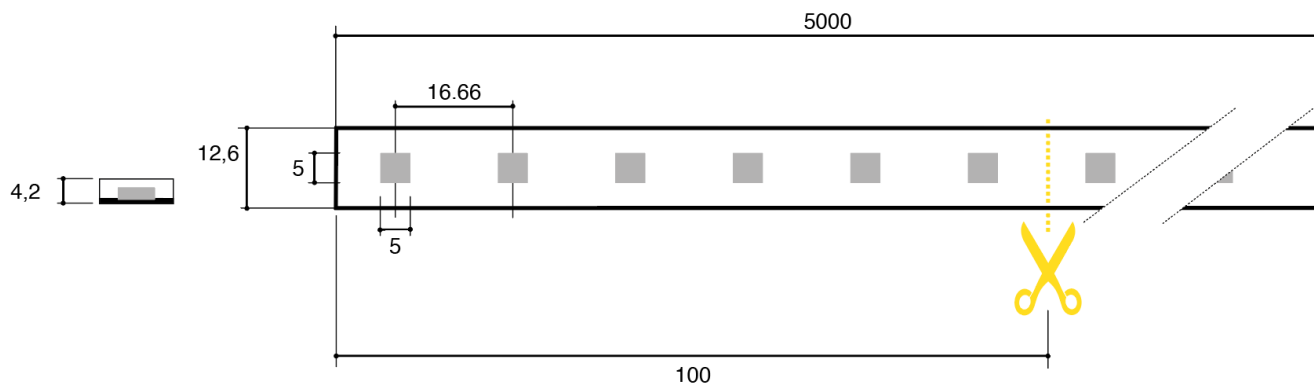

Luminous flux



Max.module lenght



Colour



Degree of protection

DESCRIZIONE

SICOMtape 14W/m RGB 24V Digital-WS2818B IP67

IP67 protection.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 14W/m RGB 24V Digital-WS2818B IP67

560DIGRGB1467



MECHANICAL DATA

Width (mm)	12,6
Height (mm)	4,2
Lenght (mm)	5000
Degree of protection (IP)	IP67
Lenght of particular segments (mm)	100

ELECTRICAL DATA

Efficiency (lm/W)	34
Lamp power per meter (W)	14,4
Lamp voltage (V)	24

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	495
Beam angle (°)	120
Binning tolerance	-
CRI (Ra)	- - -
Colour temperature	RGB
EEC	A+
IC TYPE	WS2818B

CONNECTION

Connection number	1 (supply from ends every 5meter)
Max, module lenght (mm)	5000

TEMPERATURE DATA

Lifetime (h)	45000
Ambient temperature (°C)	-25...+45



SICOMtape 14W/m RGB 24V Digital-WS2818B IP67

560DIGRGB1467




GESTIONE

Codice	Descrizione	Range di tensione	Comando	Tipo di carico
5606338	SICOMdim PIXEL	5÷24 VDC	PUSH	strisce led Pixel to Pixel

IP20 SPI



PER STRIP LED RGB

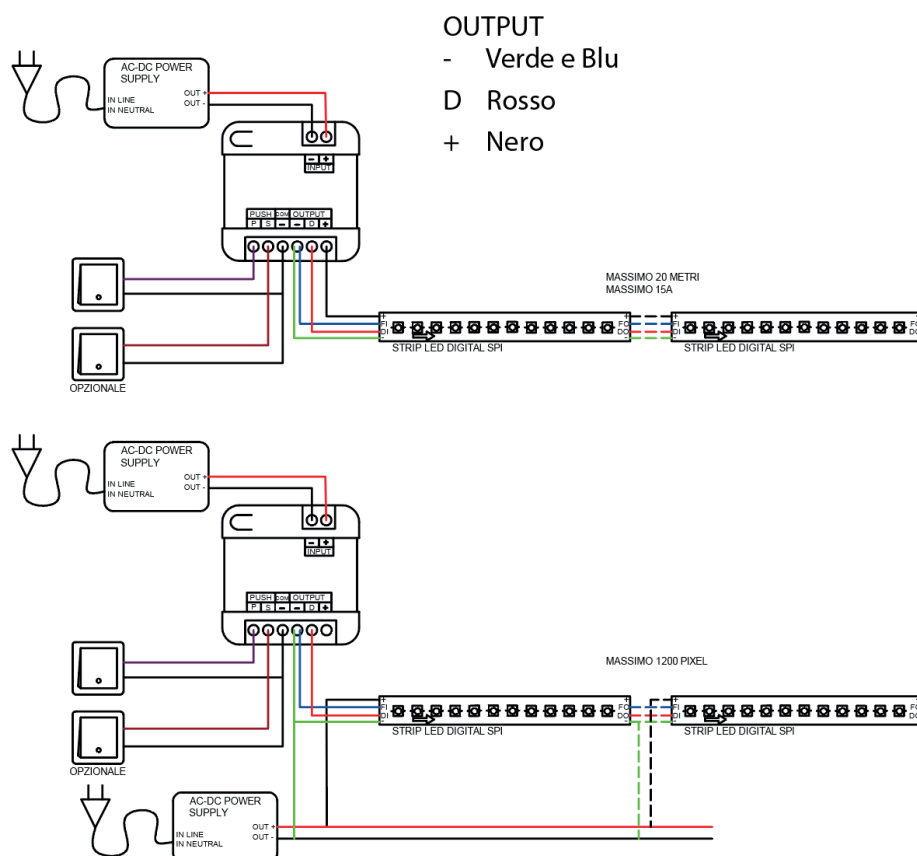

PER GLI SCHEMI DI COLLEGAMENTO SCARICARE APP DI FUNZIONAMENTO E SCHEDA TECNICA



DOWNLOAD
SCHEDA TECNICA



DOWNLOAD APP
FUNZIONAMENTO

SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738
sicom@sicom-pd.it - www.sicom-pd.it