


SICOMtape 10W/m RGBW 4000K 48V IP20




5614810RGBW4020

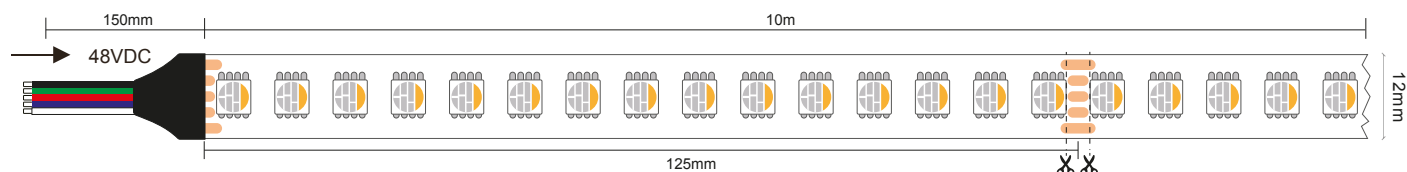

Lamp Voltage



Luminous flux



Module lenght




Colour



Degree of protection

DESCRIZIONE

SICOMtape 10W/m RGB 4000K 48V IP20



on request



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 10W/m RGBW 4000K 48V IP20

5614810RGBW4020



MECHANICAL DATA

Width (mm)	12
Height (mm)	1,5
Lenght (mm)	10000
Degree of protection (IP)	IP20
Lenght of particular segments (mm)	125

ELECTRICAL DATA

Efficiency (lm/W)	69
Lamp power per meter (W)	10
Lamp voltage (V)	48

LIGHT TECHNICAL DATA

Luminous flux (lm/m)	695
Beam angle (°)	120
CRI (Ra)	-
Colour temperature (K)	RGBW (4000K)
Number Led/M	112

CONNECTION

Max modul lenght (mm)	10.000
-----------------------	--------

TEMPERATURE DATA

Lifetime (h)	60000
Ambient temperature (°C)	-20...+40



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019

sicom@sicom-pd.it - www.sicom-pd.it

SICOMtape 10W/m RGBW 4000K 48V IP20

5614810RGBW4020



SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.
For more information, please contact sicom@sicom-pd.it.

DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738 VERSIONE 1- 10/2019
sicom@sicom-pd.it - www.sicom-pd.it