


# SICOMtape tubONE 10W RGB IP65



563TUB10RGB65

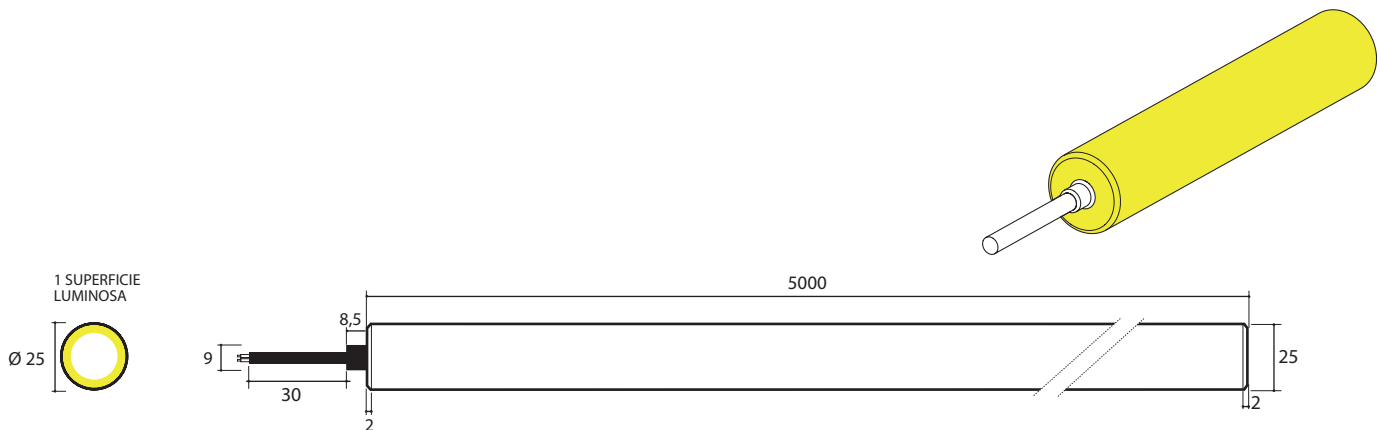

Lamp Voltage



Luminous flux



Max.module lenght



Colour




Bending diameter

## DESCRIZIONE

SICOMtape tubONE 10W RGB IP65

Good flexibility, it is 360° luminous uniformity without any shadow. Minimum bending diameter >200mm. IP65 protection, resistant to chemical.



\*on request.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738  
sicom@sicom-pd.it - www.sicom-pd.it

# SICOMtape tubONE 10W RGB IP65



563TUB10RGB65

MECHANICAL DATA		
Lenght (mm)	5000	
Ø (mm)	25	
Degree of protection (IP)	IP65	
Lenght of particular segments (mm)	-	
ELECTRICAL DATA		
Efficiency (lm/W)	24	
Lamp power per meter (W)	10	
Lamp voltage (V)	24	
Voltage range	23,5 - 24,5 Vdc	
LIGHT TECHNICAL DATA		
Luminous flux (lm/m)	248	
Beam angle (°)	125	
Binning tolerance	3 SDCM	
CRI (Ra)	-	
Colour temperature (K)	RGB	
EEC	A+	
CONNECTION		
Connection number	2	
Cable cross-section (mm <sup>2</sup> )	0,5	
Max, module lenght (mm)	5000	
TEMPERATURE DATA		
Lifetime (h)	45000	
Ambient temperature ( °C)	-25...+45	
Storage temperature ( °C)	-25...+60	
Operating temperature ( °C)	-25...+65	



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738  
sicom@sicom-pd.it - www.sicom-pd.it








# SICOMtape tubONE 10W RGB IP65



563TUB10RGB65

Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25°C ambient temperature and a light colour of 4.000 K (or RGB). These values can have a tolerance value of -/+ 10% (or -/+15%at ECO/TWO/RGB/AIR).  
Module length at 24V input voltage at the module and luminous flux drop 10% over the specified length.

## NOT INCLUDED ACCESSORIES

SICOMtubONE Installation Method	L x B x H (mm)
 563TUB1001 SICOMtape tubONE IP65 KIT SUPERFICIE Staffa	20 x 30 x 27,4
 563TUB1000 SICOM tubONE IP65 KIT SUPERFICIE c/PROFILO Staffa	100 x 30 x 27,4
 563TUB1002 SICOMtape tubONE IP65 KIT SOSPENSIONE Staffa Cavo Regolabile 1500 mm	20 x 30 x 27,4
 563TUB1003 SICOMtape tubONE IP65 KIT SOSP. c/PROFILO Cavo Regolabile 1500 mm	100 x 30 x 27,4
 563TUB1004 SICOMtape tubONE IP65 KIT Verticale corto Staffa	41,63h
 563TUB1006 SICOMtape tubONE IP65 KIT CURVA Staffe	41,63h
 563TUB1005 SICOMtape tubONE IP65 KIT Verticale lungo Staffa Cavo Regolabile 1500 mm	70h

### SAFETY INFORMATION:

Read the safety and installation instructions carefully and completely before commissioning.  
For more information please contact [sicom@sicom-pd.it](mailto:sicom@sicom-pd.it).

### DISCALIMER OF WARRANTY:

The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of data sheets.



SICOM S.R.L.

Via Austria 15/A - 35127 - PADOVA - ITALY - Tel: +39 049 8701470 - Fax: +39 049 8700738  
[sicom@sicom-pd.it](mailto:sicom@sicom-pd.it) - [www.sicom-pd.it](http://www.sicom-pd.it)