



Figura simile

SITOR- cartuccia fusibile cilindrica, 10x38 mm, 32 A, gR, Un AC: 690 V, Un DC: 250 V

Versione	
marca del prodotto	SETRON
denominazione del prodotto	Cartuccia fusibile SITOR
Dati tecnici generali	
classe di impiego della cartuccia fusibile	gR
tipo di tensione della tensione di impiego	AC
tensione di alimentazione con DC	250 V
Circuito principale	
corrente di impiego valore nominale	32 A
Dettagli	
parte integrante del prodotto indicatore di fusione	No
Progettazione meccanica	
posizione di montaggio	qualsiasi, preferibilmente verticale
Peso netto per UQ	9 g
Approvazioni Certificati	
Environment	General Product Approval

[Environmental Con-
firmations](#)



[Environmental Con-
firmations](#)



[Confirmation](#)

General Product Approval	other
	Confirmation

Ulteriori informazioni
Informazioni sull'imballaggio https://support.industry.siemens.com/cs/ww/it/view/109813875
Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Cataloghi, Opuscoli,...) https://www.siemens.com/lowvoltage/catalogs
Industry Mall (sistema di ordinazione Online) https://mall.industry.siemens.com/mall/it/it/Catalog/product?mlfb=3NC1032-0MK
Service&Support (Manuali, Certificati, Caratteristiche, FAQ, ...) https://support.industry.siemens.com/cs/ww/it/ps/3NC1032-0MK

Banca dati immagini (foto prodotto, disegni dimensionali 2D, modelli 3D, schemi delle connessioni, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC1032-0MK

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Curve caratteristiche

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

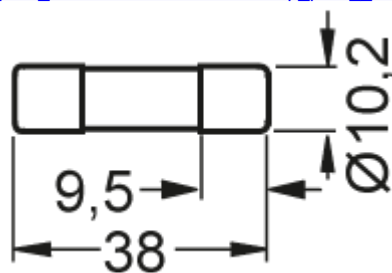

Ultima modifica:

14/11/2025 

