SIEMENS

Foglio dati 3NC1402



Figura simile

SITOR- cartuccia fusibile cilindrica, 14x51 mm, 2 A, aR, Un AC: 660 V

Versione	
marca del prodotto	SENTRON
denominazione del prodotto	Cartuccia fusibile SITOR
Dati tecnici generali	
classe di impiego della cartuccia fusibile	aR
tipo di tensione della tensione di impiego	AC
Dissipazione	
potenza dissipata [W]	3 W
potenza dissipata [W] con valore nominale di corrente con AC in stato di funzionamento caldo per ogni polo	3 W
Circuito principale	
corrente di impiego valore nominale	2 A
Dettagli	
parte integrante del prodotto indicatore di fusione	No
Progettazione meccanica	
posizione di montaggio	qualsiasi, preferibilmente verticale
Peso netto per UQ	20 g
Approvazioni Certificati	


Environment		General Product Approval		
Environmental Confirmations	EPD	Environmental Confirmations	cULus	EAC Confirmation

General Product Approval	other	
CE EG-Konf.	UKCA	Confirmation 产品合格 QC PASS

Ulteriori informazioni
Informazioni sull'imballaggio https://support.industry.siemens.com/cs/ww/it/view/109813875 **Information for data generation and storage** https://support.industry.siemens.com/cs/ww/en/view/109995012 **Information- and Downloadcenter (Cataloghi, Opuscoli,…)** https://www.siemens.com/lowvoltage/catalogs

Con riserva di modifiche
© Copyright Siemens

Industry Mall (sistema di ordinazione Online)
https://mall.industry.siemens.com/mall/it/it/Catalog/product?mlfb=3NC1402
Service&Support (Manuali, Certificati, Caratteristiche, FAQ, …)
https://support.industry.siemens.com/cs/ww/it/ps/3NC1402
Banca dati immagini (foto prodotto, disegni dimensionali 2D, modelli 3D, schemi delle connessioni, …)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC1402
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Curve caratteristiche
https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod__no>

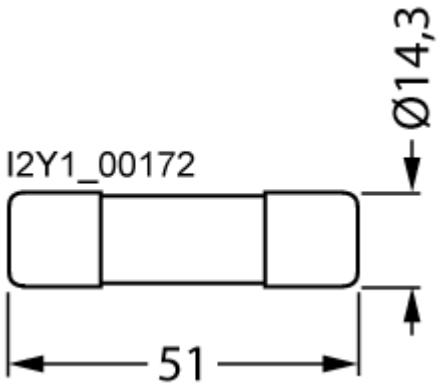

Ultima modifica: 14/11/2025

© Copyright Siemens

Con riserva di modifiche
© Copyright Siemens