SIEMENS

Foglio dati 3NC2320-0MK



Figura simile

SITOR- cartuccia fusibile cilindrica, 22x127 mm, 20 A, gS, Un AC: 1500 V, Un DC: 1000 V

Versione	
marca del prodotto	SENTRON
denominazione del prodotto	Cartuccia fusibile SITOR
Dati tecnici generali	
classe di impiego della cartuccia fusibile	gS
tipo di tensione della tensione di impiego	AC
tensione di alimentazione con DC	1 000 V
Circuito principale	
corrente di impiego valore nominale	20 A
Dettagli	
parte integrante del prodotto indicatore di fusione	No
Progettazione meccanica	
posizione di montaggio	qualsiasi, preferibilmente verticale
Peso netto per UQ	0,104 kg
Approvazioni Certificati	

Environment		General Product Approval	
Environmental Confirmations	EPD	Environmental Confirmations	EAC Confirmation UKCA

General Product Approval	other
CE EG-Konf.	Confirmation 产品合格 QC PASS

Ulteriori informazioni

Informazioni sull'imballaggio
https://support.industry.siemens.com/cs/ww/it/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Cataloghi, Opuscoli,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (sistema di ordinazione Online)
https://mall.industry.siemens.com/mall/it/it/Catalog/product?mlfb=3NC2320-0MK
Service&Support (Manuali, Certificati, Caratteristiche, FAQ, …)

Con riserva di modifiche
© Copyright Siemens


https://support.industry.siemens.com/cs/ww/it/ps/3NC2320-0MK

Banca dati immagini (foto prodotto, disegni dimensionali 2D, modelli 3D, schemi delle connessioni, …)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC2320-0MK

CAx-Online-Generator
https://www.siemens.com/cax

Tender specifications
https://www.siemens.com/specifications

Curve caratteristiche
https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod__no>

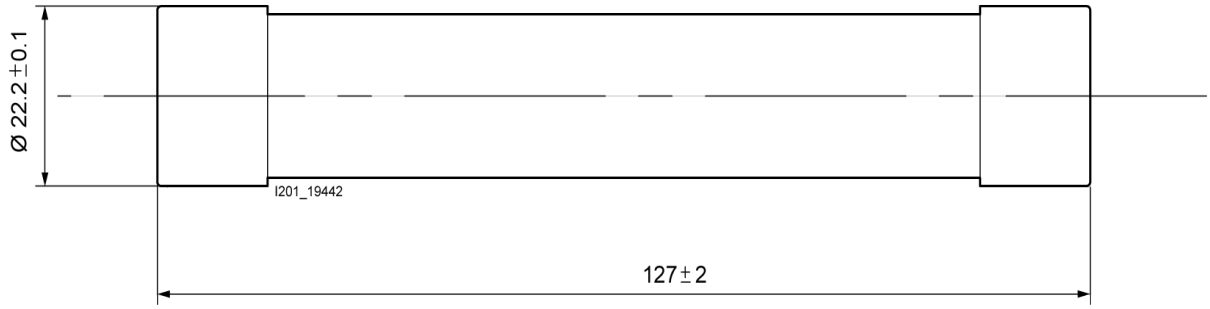

Ultima modifica: 14/11/2025

© Copyright Siemens

Con riserva di modifiche
© Copyright Siemens