SIEMENS

Foglio dati 3NW6110-1



Figura simile

SENTRON, cartuccia fusibile cilindrica, 14x51 mm, 25 A, gG, Un AC: 690 V

Versione	
marca del prodotto	SENTRON
denominazione del prodotto	Cartuccia cilindrica
Dati tecnici generali	
classe di impiego della cartuccia fusibile	gG
tipo di tensione della tensione di impiego	AC
tensione di alimentazione con DC	250 V
Dissipazione	
potenza dissipata [W]	2,8 W
potenza dissipata [W] con valore nominale di corrente con AC in stato di funzionamento caldo per ogni polo	3 W
Circuito principale	
corrente di impiego valore nominale	25 A
Dettagli	
parte integrante del prodotto indicatore di fusione	No
Progettazione meccanica	
posizione di montaggio	qualsiasi, preferibilmente verticale
Peso netto per UQ	21 g

Approvazioni Certificati

Environment	General Product Approval			other
Environmental Confirmations	EAC	Confirmation	CE EG-Konf.	UKCA	Confirmation

other


产品合格 QC PASS

Ulteriori informazioni

Informazioni sull'imballaggio
https://support.industry.siemens.com/cs/ww/it/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Cataloghi, Opuscoli,…)

Con riserva di modifiche
© Copyright Siemens

https://www.siemens.com/lowvoltage/catalogs
Industry Mall (sistema di ordinazione Online)
https://mall.industry.siemens.com/mall/it/it/Catalog/product?mlfb=3NW6110-1
Service&Support (Manuali, Certificati, Caratteristiche, FAQ, …)
https://support.industry.siemens.com/cs/ww/it/ps/3NW6110-1
Banca dati immagini (foto prodotto, disegni dimensionali 2D, modelli 3D, schemi delle connessioni, …)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW6110-1
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Curve caratteristiche
https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod__no>

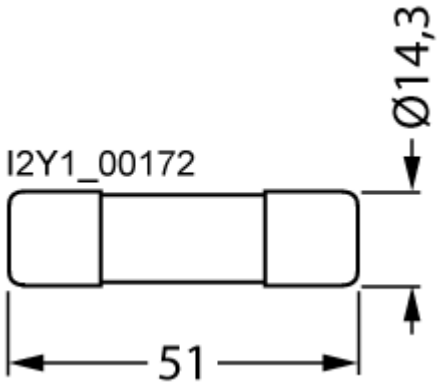

Ultima modifica: 11/04/2025

© Copyright Siemens

Con riserva di modifiche
© Copyright Siemens