


Siemens
EcoTech



calotta coprimorsetti per 3RW55/52 grand. costr. 4

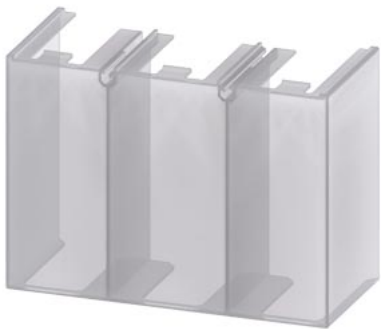

marca del prodotto	SIRIUS
categoria del prodotto	Calotte coprimorsetti
denominazione del prodotto	Copertura connessioni
designazione del tipo di prodotto	3RW59
n. di articolo del produttore del softstarter	
•	3RW524 (2x)
•	3RW554 (2x)

Dati tecnici generali	
Direttiva RoHS (data)	02/15/2018
Peso netto per UQ	0,175 kg
Condizioni ambientali	
temperatura ambiente durante l'immagazzinaggio e il trasporto	-40 ... +80 °C
Sicurezza elettrica	
grado di protezione IP lato frontale secondo IEC 60529	IP20
protezione contro i contatti accidentali lato frontale secondo IEC 60529	sicuro a prova di dito per contatto verticale dal davanti

Approvazioni Certificati	
Environment	General Product Approval

[Environmental Con-
firmations](#)



EMV	For use in hazard- ous locations	Test Certificates	Maritime application
-----	-------------------------------------	-------------------	----------------------



[Miscellaneous](#)

[Type Test Certifi-
cates/Test Report](#)



Maritime application	other
----------------------	-------



[Confirmation](#)

[Confirmation](#)



Ulteriori informazioni

Informazioni sull'imballaggio

<https://support.industry.siemens.com/cs/ww/it/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Cataloghi, Opuscoli,...)

<https://www.siemens.com/ic10>

Industry Mall (sistema di ordinazione Online)

<https://mall.industry.siemens.com/mall/it/it/Catalog/product?mlfb=3RW5984-0TC20>

Service&Support (Manuali, Certificati, Caratteristiche, FAQ, ...)

<https://support.industry.siemens.com/cs/ww/it/ps/3RW5984-0TC20>

Banca dati immagini (foto prodotto, disegni dimensionali 2D, modelli 3D, schemi delle connessioni, macro EPLAN...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5984-0TC20&lang=en

Generatore CAx online

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5984-0TC20>

Curve caratteristiche

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>

Caratteristica: Comportamento di sgancio, I_t, Corrente di interruzione limitata


<https://support.industry.siemens.com/cs/ww/en/ps/3RW5984-0TC20/char>

Curve caratteristiche: Altitudine di installazione

https://www.automation.siemens.com/bilddb/index.aspx?gridview=view2&objkey=G_NSB0_XX_01704&showdetail=true&view=Search

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

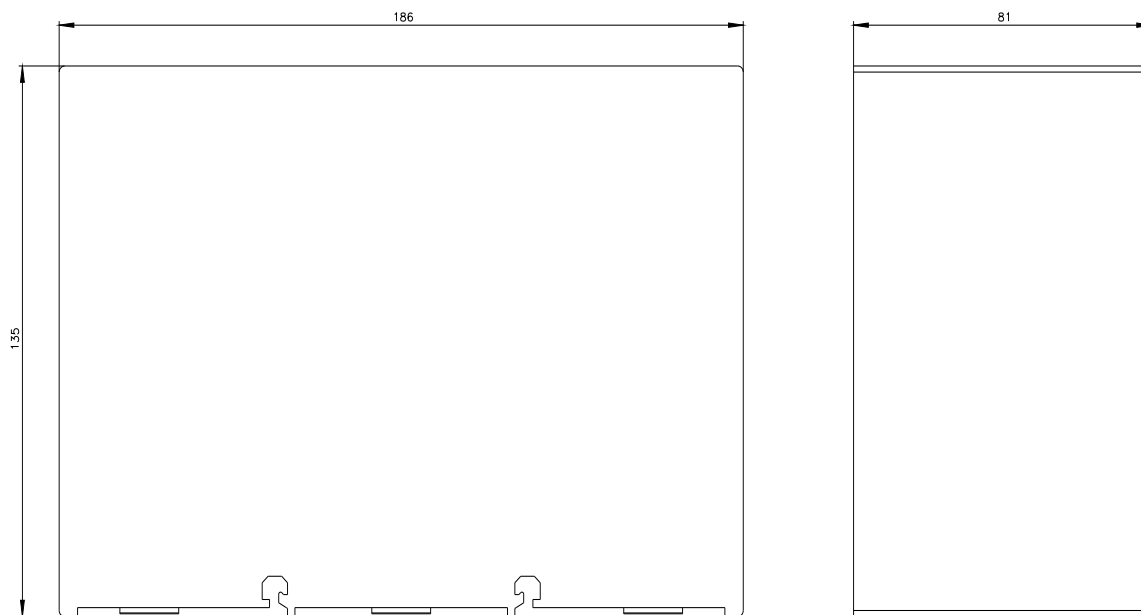

Ultima modifica:

02/04/2025

