



FOUR

R4 LED

R4 LED



Corpo / Body / Corps  

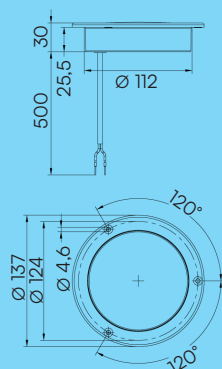

Dispositivo di segnalazione a LED, sviluppato per la gestione del traffico nei punti di accesso. **R4 LED** dispone di due colorazioni del corpo (cromato e bianco) che consentono al dispositivo di confondersi con il design dei punti di accesso. Luce fissa.

TENSIONE OPERATIVA

24V ACDC $\pm 10\%$ (AC: 50/60 Hz)

CARATTERISTICHE GENERALI

Temperatura di funzionamento: $-30^{\circ} + 50^{\circ}\text{C}$

Grado di protezione: IP66

Servizio continuo

CARATTERISTICHE MECCANICHE

Corpo e lente in polycarbonato. Alta resistenza agli impatti, alle vibrazioni, alla polvere e agli agenti atmosferici. Installazione retroquadro con 3 viti a testa svasata e connessione tramite cavo bipolare 500 mm.

CARATTERISTICHE LUMINOSE

24 LED quadrati superflux ad alta intensità. Luce fissa.

CERTIFICAZIONI / CERTIFICATIONS



R4 LED

V DC	24	-
V AC	-	24
mA	90	140



LED - Cd max	24V	115	
LED - Cd max	24V	60	
LED - Cd max	24V	140	



Priority signaling LED device engineered for gates and access points. **R4 LED** benefits from two body colors (chrome and white), allowing to blend with the design of the access point. Steady light.

VOLTAGES

24V ACDC $\pm 10\%$ (AC: 50/60 Hz)

GENERAL FEATURES

Operating temperature: $-30^{\circ} + 50^{\circ}\text{C}$

IP rating: IP66

Continuous operation

MECHANICAL FEATURES

Polycarbonate body and lens. Totally protected against vibrations, dust and atmospheric elements. Designed to be flush mounted, it can be secured with 3 countersunk screws. Wiring through 500 mm bipolar cable.

OPTICAL FEATURES

24 Superflux square LED with high optical performance. Steady light.



Dispositif de signalisation à LED développé pour portes et points d'accès. **R4 LED** dispose de deux couleurs du corps (chromé et blanc), permettant au dispositif de se confondre avec le design des points d'accès. Lumière fixe.

TENSION D'UTILISATION

24V ACDC $\pm 10\%$ (AC : 50/60 Hz)

CARACTÉRISTIQUES GÉNÉRALES

Température de fonctionnement : $-30^{\circ} + 50^{\circ}\text{C}$

Degré IP : IP66

Service continu

CARACTÉRISTIQUES MÉCANIQUES

Corps et lentille en polycarbonate. Protégé contre les vibrations, la poussière et les agents atmosphériques. Installation à encastrer par 3 vis plates et connexion par câble bipolaire de 500 mm.

CARACTÉRISTIQUES OPTIQUES

24 LED carrées Superflux à haute définition optique. Lumière fixe.

R4 LED

-  24V ACDC  21416  21415  21417
-  24V ACDC  21419  21418  21420