

ESSENTIAL CHARACTERISTICS	
Duration of operation	Pass
Provision for external conductors	Pass
Flammability of materials	Pass
Enclosure protection	Pass
Access	Pass
Manufacturer's adjustments	Pass
On-site adjustment of behaviour	Pass
Requirements for software controlled devices	Pass
Coverage volume	Pass
Variation of light output	Pass
Minimum and maximum light intensity	Pass
Light colour	White
Light temporal pattern / frequency of flashing	Pass / 1,5 Hz
Marking and data	Pass
Synchronization	Pass
Temperature resistance	Pass
Humidity resistance	Pass
Shock and vibration resistance	Pass
Corrosion resistance	Pass
Electrical stability	Pass

 14
1328-CPR-0423

Dispositivo luminoso di allarme incendio (Tipo B) conforme EN 54-23:2010
Fire Alarm visual device (Type B), conform to EN 54-23:2010
Avertisseur lumineux pour Alarme Incendie (Type B), conformément à EN 54-23:2010
Feueralarm optische Gerät (Typ B), EN 54-23:2010 entsprechenden
Dispositivo luminoso de Alarma de Incendio (Tipo B), conforme con EN 54-23:2010



NON SMALTIRE COME RIFIUTO URBANO - NOT TO BE DISPOSED OF AS COMMON WASTE - NE PAS ELIMINER COMME DECHET URBAIN
NICHT ÜBER DIE NORMALE SAMMLUNG VON HAUSMÜLL ENTSORGEN - NO ELIMINAR COMO DESECHO URBANO

SIRENA


SLR FA

IP 66   14

- ISTRUZIONI DI INSTALLAZIONE E UTILIZZO - INSTALLATION AND APPLICATION INSTRUCTIONS -
- INSTRUCTIONS D' INSTALLATION ET D' UTILISATION - INSTALLATIONS- UND BEDIENUNGSANLEITUNG -
- INSTRUCCIONES DE INSTALACIÓN Y EMPLEO -

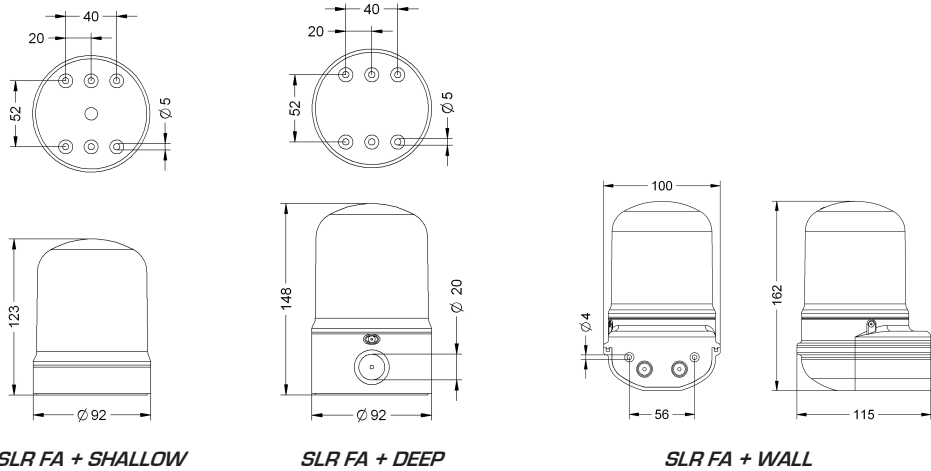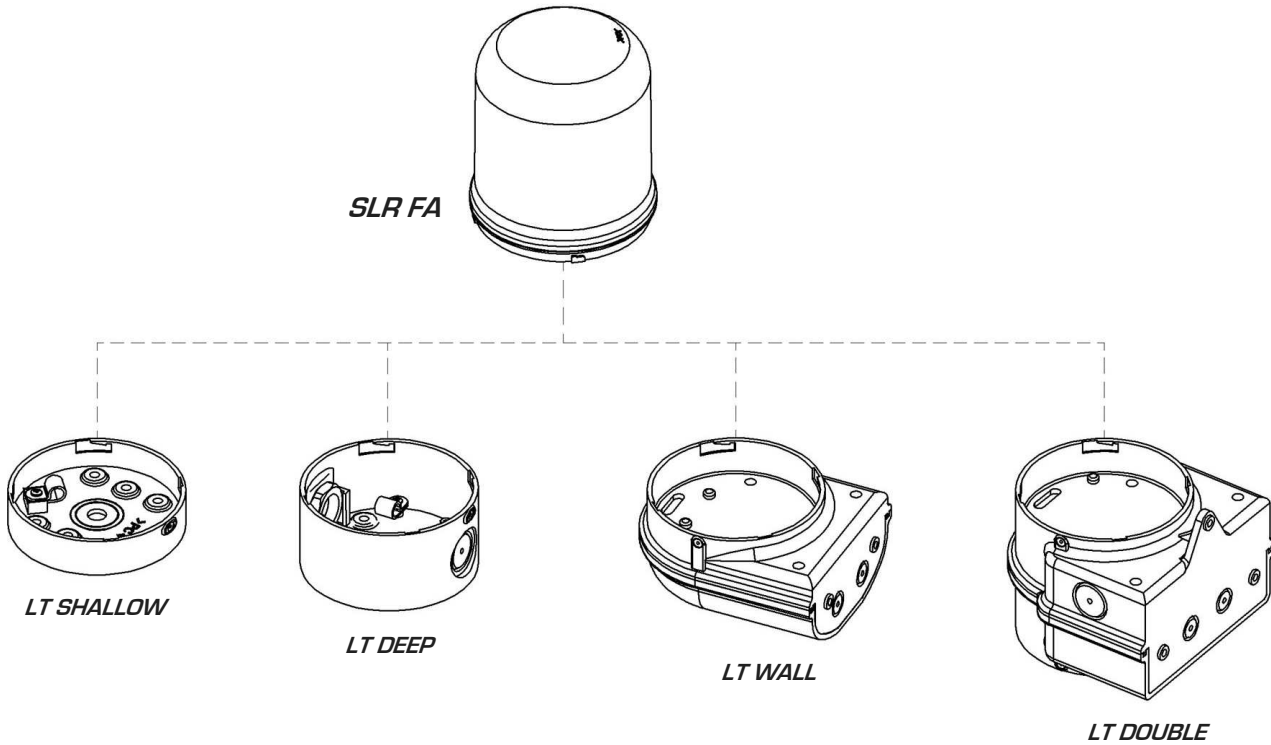


V	24
mA	300
° C	"-30 +70"

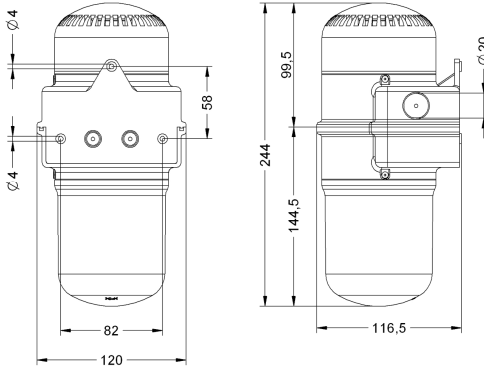


SLR FA + DOUBLE (with SIRE FA)


CABLAGGIO/WIRING/CÂBLAGE/VERKABELUNG/CABLEADO BASES LT (24V DC)

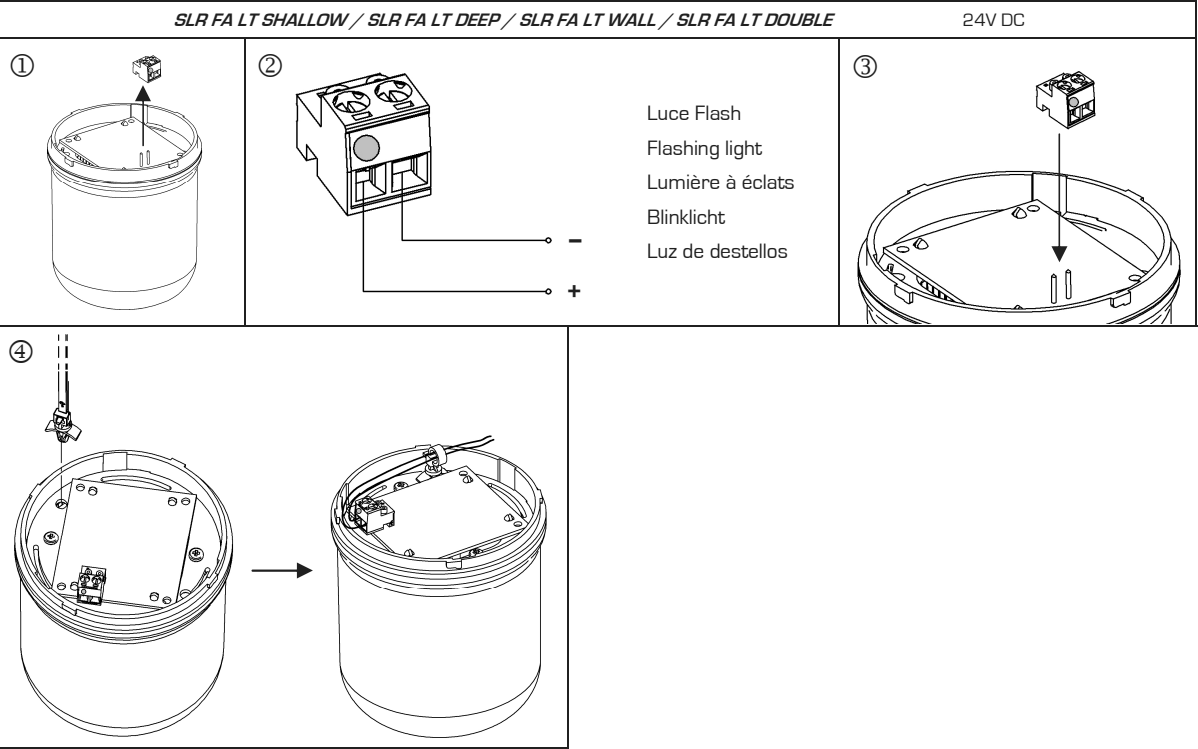

Parametri di prestazione - Volume di copertura
Performance parameters

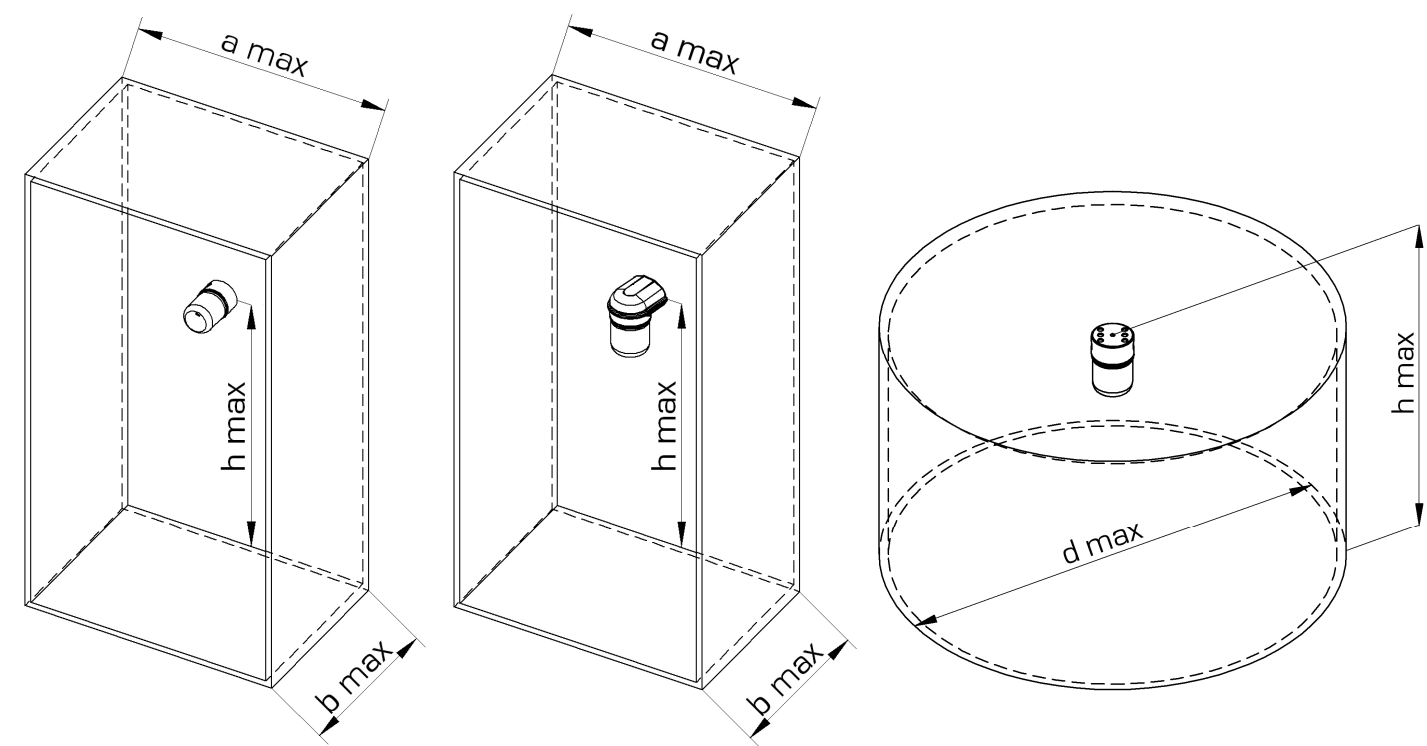

BLOCCAGGIO CUPOLE/DOME TIGHTENING/SERRAGE DU DÔME
ANZIEHEN DER HAUBE/APRIETE DE LA CUPULA

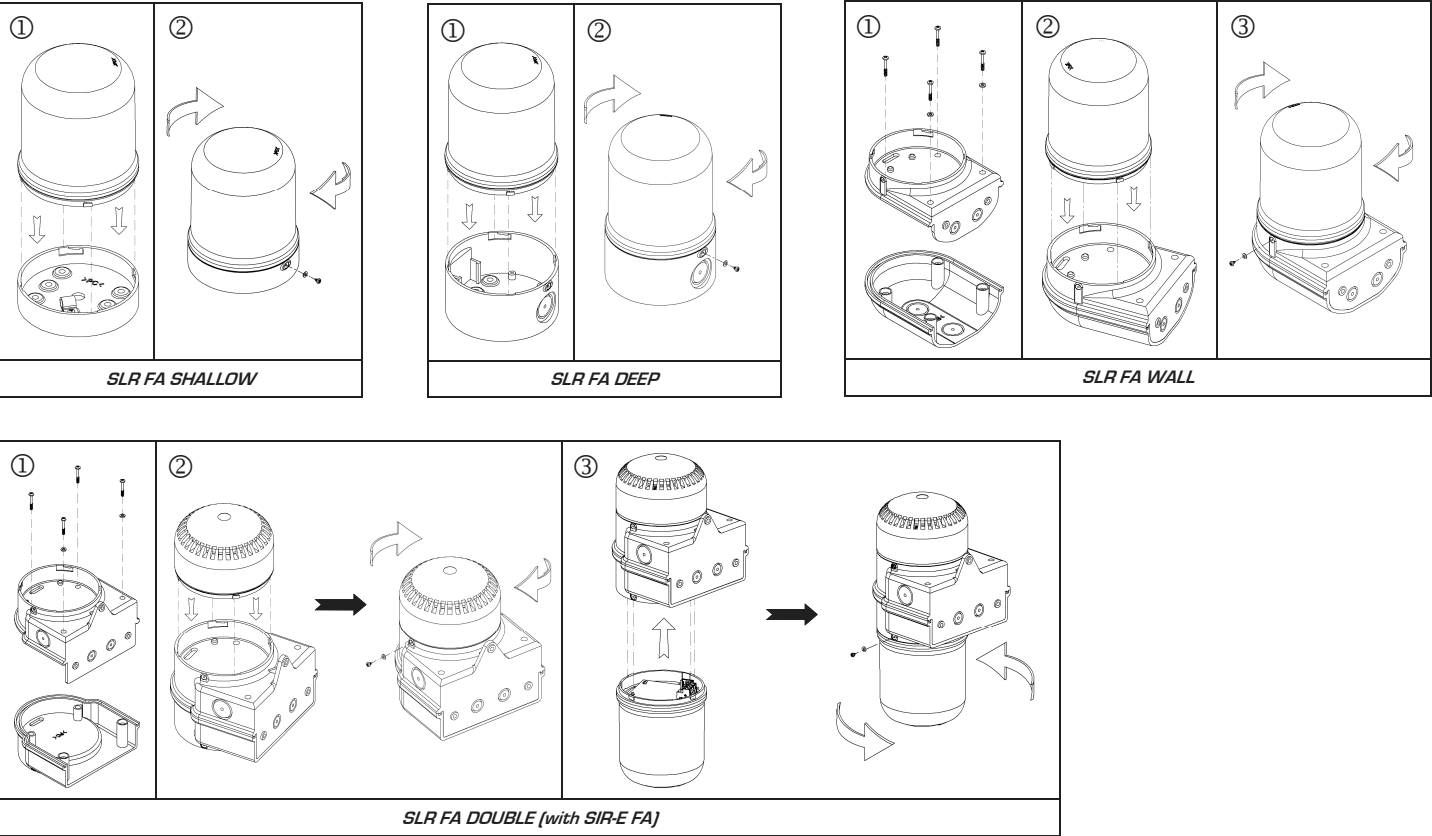

Categorie di installazione Mounting Category	h _{max} (m)	a _{max} (m)	b _{max} (m)	d _{max} (m)
W Fissaggio a parete / Wall Mount LT SHALLOW / DEEP	2,4	3,7	3,7	—
W Fissaggio a parete / Wall Mount WALL / DOUBLE	2,7	3,2	3,2	—
C Fissaggio a soffitto / Ceiling Mount LT SHALLOW / DEEP	3	—	—	5,8
O Posizione di montaggio a scelta Freely selectable mounting position LT SHALLOW / DEEP	2,4	5,5	3,7	—
	2	5,5	4,6	—
O Posizione di montaggio a scelta Freely selectable mounting position WALL / DOUBLE	2,7	5,1	3,2	—

h_{max}: altezza massima di installazione / max. mounting height

a_{max}: larghezza massima camera / max. room width

b_{max}: profondità massima camera / max. room depth

d_{max}: diametro massimo di copertura / max. diameter